



A330-700L

**AIRCRAFT CHARACTERISTICS
AIRPORT AND MAINTENANCE PLANNING**

AC

The content of this document is the property of Airbus.

It is supplied in confidence and commercial security on its contents must be maintained.

It must not be used for any purpose other than that for which it is supplied, nor may information contained in it be disclosed to unauthorized persons.

It must not be reproduced in whole or in part without permission in writing from the owners of the copyright. Requests for reproduction of any data in this document and the media authorized for it must be addressed to Airbus.

© AIRBUS S.A.S. 2005. All rights reserved.

*AIRBUS S.A.S.
Customer Services
Technical Data Support and Services
31707 Blagnac Cedex
FRANCE*

HIGHLIGHTS

Revision No. 4 - Jul 01/23

LOCATIONS	CHG CODE	DESCRIPTIONS OF CHANGE
<u>CHAPTER 4</u> Section 4-5 Subject 4-5-3 180° Turn on a Runway FIGURE 180° Turn on a Runway	 R R	 REPLACED THE APPROX RUNWAY WIDTH VALUE 48.8 m BY 47.8 m AND THE PAVEMENT EDGE CLEARANCE VALUE 4.5 m BY 4.0 m.
<u>CHAPTER 5</u> Section 5-1 Subject 5-1-0 Aircraft Servicing Arrangements Subject 5-1-1 Symbols Used on Servicing Diagrams Subject 5-1-2 FIGURE Typical Ramp Layout Section 5-8 Subject 5-8-0 FIGURE Ground Towing Requirements	 R N N N N R R	 ADDED GROUND SAFETY EQUIPMENTS (GPU, ILF, LV, AC, AS, ULD AND BULK) FOR THE TYPICAL RAMP LAYOUT IN THE ILLUSTRATION.
<u>CHAPTER 6</u> Section 6-3 Subject 6-3-2 FIGURE Danger Areas of Engines - RR Trent 700 Series Engine Subject 6-3-3	 R	

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

LOCATIONS	CHG CODE	DESCRIPTIONS OF CHANGE
FIGURE Danger Areas of Engines - RR Trent 700 Series Engine	R	

LIST OF EFFECTIVE CONTENT**Revision No. 4 - Jul 01/23**

CONTENT	CHG CODE	LAST REVISION DATE
CHAPTER 1		
Subject 1-1-0		
Introduction		Apr 01/20
Subject 1-2-1		
Glossary		Aug 01/22
CHAPTER 2		
Subject 2-1-1		
General Aircraft Characteristics Data		Apr 01/20
Subject 2-2-0		
General Aircraft Dimensions		Apr 01/20
FIGURE General Aircraft Dimensions		Apr 01/20
Subject 2-3-0		
Ground Clearances		Aug 01/22
FIGURE Ground Clearances - Ground Clearances for WV000 at MRW and 135 000 kg (297 624 lb)		Aug 01/22
FIGURE Ground Clearances - Ground Clearances for Flaps Retracted with WV000		Jul 01/21
FIGURE Ground Clearances - Ground Clearances for Flaps in Intermediate Position with WV000		Jul 01/21
FIGURE Ground Clearances - Ground Clearances for Flaps Fully Extended with WV000		Jul 01/21
Subject 2-4-1		

CONTENT	CHG CODE	LAST REVISION DATE
Interior Arrangements - Plan View		Apr 01/20
FIGURE Interior Arrangements - Plan View		Apr 01/20
Subject 2-6-1		
Lower Deck Cargo Compartments		Apr 01/20
FIGURE Lower Deck Cargo Compartments - Location and Dimensions		Apr 01/20
Subject 2-6-2		
Main Deck Cargo Compartment		Apr 01/20
FIGURE Main-Deck Cargo Compartment - Location and Dimensions		Apr 01/20
Subject 2-6-3		
Main and Lower Deck Cross-sections		Apr 01/20
FIGURE Lower-Deck Cargo Cross-sections		Apr 01/20
FIGURE Main-Deck-Cargo Arrangement Cross-sections		Apr 01/20
Subject 2-7-0		
Door Clearances		Aug 01/22
FIGURE Lateral Position of Doors from Aircraft Nose		Apr 01/20
FIGURE Radome		Aug 01/22
FIGURE Belly Door and Sliding Windows		Aug 01/22
FIGURE Aft Cargo-Compartment Door		Apr 01/20
FIGURE Bulk Cargo-Compartment Door		Apr 01/20

CONTENT	CHG CODE	LAST REVISION DATE
FIGURE MLG Doors		Apr 01/20
Subject 2-9-0		
Landing Gear		Apr 01/20
FIGURE Landing Gear Position		Aug 01/22
FIGURE Main Landing Gear		Apr 01/20
FIGURE Nose Landing Gear		Apr 01/20
FIGURE Tow Truck Power - NLG Servicing 3		Apr 01/20
Subject 2-10-0		
Exterior Lighting		Apr 01/20
FIGURE Exterior Lighting - Lights General Layout		Apr 01/20
Subject 2-11-0		
Antennas and Probes Location		Apr 01/20
FIGURE Antennas and Probes - Location		Jun 01/20
Subject 2-12-0		
Engine and Nacelle		Apr 01/20
FIGURE Engine and Nacelle - Engine Dimensions - RR TRENT 700		Apr 01/20
FIGURE Engine and Nacelle - Nacelle Dimensions - RR TRENT 700		Apr 01/20
FIGURE Engine and Nacelle - Fan Cowls - RR TRENT 700		Apr 01/20
FIGURE Engine and Nacelle - Thrust Reverser Cowls - RR TRENT 700		Apr 01/20
Subject 2-12-1		

CONTENT	CHG CODE	LAST REVISION DATE
Auxiliary Power Unit		Apr 01/20
FIGURE Auxiliary Power Unit - Access Doors		Apr 01/20
Subject 2-13-0		
Leveling and Symmetry		Jun 01/20
FIGURE Location of Leveling Points		Apr 01/20
Subject 2-14-0		
Jacking for Maintenance		Apr 01/20
FIGURE Jacking for Maintenance - Jacking Points Layout and Maximum Jacking Force		Apr 01/20
FIGURE Jacking for Maintenance - Ground Clearance on Jacks		Jul 01/21
FIGURE Jacking for Maintenance - Jacking Point Adaptors		Apr 01/20
Subject 2-14-1		
Jacking of the Landing Gear		Apr 01/20
FIGURE Jacking of the Landing Gear - Jacking of the Landing Gear		Apr 01/20
FIGURE Jacking of the Landing Gear		Apr 01/20
<u>CHAPTER 3</u>		
Subject 3-1-0		
General Information		Aug 01/22
<u>CHAPTER 4</u>		
Subject 4-1-0		
General Information		Apr 01/20
Subject 4-2-0		

CONTENT	CHG CODE	LAST REVISION DATE
Turning Radii		Apr 01/20
FIGURE Turning Radii - (Sheet 1)		Apr 01/20
FIGURE Turning Radii - (Sheet 2)		Apr 01/20
Subject 4-3-0		
Minimum Turning Radii		Apr 01/20
FIGURE Minimum Turning Radii		Apr 01/20
Subject 4-4-0		
Visibility from Cockpit in Static Position		Apr 01/20
FIGURE Visibility from Cockpit in Static Position		Apr 01/20
FIGURE Binocular Visibility Through Windows from Captain Eye Position		Apr 01/20
Subject 4-5-0		
Runway and Taxiway Turn Paths		Apr 01/20
Subject 4-5-1		
135° Turn - Runway to Taxiway		Apr 01/20
FIGURE 135° Turn - Runway to Taxiway - Judgemental Oversteer Method		Apr 01/20
FIGURE 135° Turn - Runway to Taxiway - Cockpit Over Centerline Method		Apr 01/20
Subject 4-5-2		
90° Turn - Runway to Taxiway		Apr 01/20

CONTENT	CHG CODE	LAST REVISION DATE
FIGURE 90° Turn - Runway to Taxiway - Judgemental Oversteer Method		Apr 01/20
FIGURE 90° Turn - Runway to Taxiway - Cockpit Over Centerline Method		Apr 01/20
Subject 4-5-3 180° Turn on a Runway	R	Jul 01/23
FIGURE 180° Turn on a Runway Subject 4-5-4	R	Jul 01/23
135° Turn - Taxiway to Taxiway		Apr 01/20
FIGURE 135° Turn - Taxiway to Taxiway - Judgemental Oversteer Method		Apr 01/20
FIGURE 135° Turn - Taxiway to Taxiway - Cockpit Over Centerline Method Subject 4-5-5		Apr 01/20
90° Turn - Taxiway to Taxiway		Apr 01/20
FIGURE 90° Turn - Taxiway to Taxiway - Judgemental Oversteer Method		Apr 01/20
FIGURE 90° Turn - Taxiway to Taxiway - Cockpit Over Centerline Method Subject 4-6-0		Apr 01/20
Runway Holding Bay (Apron)		Apr 01/20
FIGURE Runway Holding Bay (Apron) Subject 4-7-0		Apr 01/20

CONTENT	CHG CODE	LAST REVISION DATE
Minimum Line-Up Distance Corrections		Apr 01/20
FIGURE Minimum Line-Up Distance Corrections - 90° Turn on Runway Entry		Apr 01/20
FIGURE Minimum Line-Up Distance Corrections - 180° Turn on Runway Turn Pad		Apr 01/20
FIGURE Minimum Line-Up Distance Corrections - 180° Turn on Runway Width		Apr 01/20
Subject 4-8-0		
Aircraft Mooring		Apr 01/20
FIGURE Aircraft Mooring		Apr 01/20
<u>CHAPTER 5</u>		
Subject 5-1-0		
Aircraft Servicing Arrangements	N	Jul 01/23
Subject 5-1-1		
Symbols Used on Servicing Diagrams	N	Jul 01/23
Subject 5-1-2		
05-01-02 Typical Ramp Layout		Jun 01/20
FIGURE Typical Ramp Layout	R	Jul 01/23
Subject 5-4-1		
Ground Service Connections Layout		Apr 01/20
FIGURE Ground Service Connections Layout		Apr 01/20
Subject 5-4-2		
Grounding (Earthing) Points		Apr 01/20

CONTENT	CHG CODE	LAST REVISION DATE
FIGURE Ground Service Connections - Grounding (Earthing) Points		Apr 01/20
FIGURE Ground Service Connections - Grounding (Earthing) Points		Aug 01/22
FIGURE Ground Service Connections - Grounding (Earthing) Points		Apr 01/20
Subject 5-4-3 Hydraulic System		Apr 01/20
FIGURE Ground Service Connections - Green System Ground Service Panel		Apr 01/20
FIGURE Ground Service Connections - Blue System Ground Service Panel		Apr 01/20
FIGURE Ground Service Connections - Yellow System Ground Service Panel		Apr 01/20
FIGURE Ground Service Connections - RAT		Apr 01/20
Subject 5-4-4 Electrical Servicing		Jun 01/20
FIGURE Ground Service Connections - Electrical Service Panel		Jun 01/20
FIGURE Ground Service Connections - Maintenance Bus-Switch Location		Apr 01/20
Subject 5-4-5 Oxygen System		Apr 01/20
FIGURE Ground Service Connections - Oxygen Servicing		Apr 01/20
Subject 5-4-6		

CONTENT	CHG CODE	LAST REVISION DATE
Fuel System		Apr 01/20
FIGURE Ground Service Connections - Refuel/Defuel Control Panel		Apr 01/20
FIGURE Ground Service Connections - Refuel/Defuel Coupling		Apr 01/20
FIGURE Ground Service Connections - Overpressure Protector and NACA Flame Arrestor - Wing		Apr 01/20
Subject 5-4-7		
Pneumatic System		Apr 01/20
FIGURE Ground Service Connections - LP and HP Ground Connectors		Apr 01/20
Subject 5-4-8		
Oil System		Apr 01/20
FIGURE Ground Service Connections - Engine Oil Tank - RR Trent 700 Series Engine		Apr 01/20
FIGURE Ground Service Connections - IDG Oil Tank - RR Trent 700 Series Engine		Apr 01/20
FIGURE Ground Service Connections - Starter Oil Tank - RR Trent 700 Series Engine		Apr 01/20
APU Oil Servicing		Apr 01/20
FIGURE Ground Service Connections - APU Oil Servicing		Apr 01/20
Subject 5-4-10		
Waste Water System		Jun 01/20

CONTENT	CHG CODE	LAST REVISION DATE
FIGURE Ground Service Connections - Waste-Water Ground-Service Panels		Jun 01/20
Subject 5-4-11		
Cargo Control Panels		Apr 01/20
FIGURE Lower Cargo Door Operation Panel		Apr 01/20
FIGURE MDCD Control Panel		Apr 01/20
Subject 5-5-0		
Engine Starting Pneumatic Requirements		Apr 01/20
FIGURE Engine Starting Pneumatic Requirements - Rolls Royce Trent 700 Series Engine		Apr 01/20
Subject 5-6-0		
Ground Pneumatic Power Requirements		Aug 01/22
Subject 5-7-0		
Preconditioned Airflow Requirements		Aug 01/22
Subject 5-8-0		
Ground Towing Requirements		Jun 01/20
FIGURE Ground Towing Requirements	R	Jul 01/23
FIGURE Ground Towing Requirements - Location of the RAOs		Jun 01/20
Subject 5-9-0		
De-Icing and External Cleaning		Apr 01/20
FIGURE De-Icing and External Cleaning		Apr 01/20
<u>CHAPTER 6</u>		
Subject 6-1-0		

CONTENT	CHG CODE	LAST REVISION DATE
Engine Exhaust Velocities and Temperatures		Apr 01/20
Subject 6-1-1		
Engine Exhaust Velocities Contours - Ground Idle Power		Apr 01/20
FIGURE Engine Exhaust Velocities - Ground Idle Power - RR Trent 700 Series Engine		Apr 01/20
Subject 6-1-2		
Engine Exhaust Temperatures Contours - Ground Idle Power		Apr 01/20
FIGURE Engine Exhaust Temperatures - Ground Idle Power - RR Trent 700 Series Engine		Apr 01/20
Subject 6-1-3		
Engine Exhaust Velocities Contours - Breakaway Power		Apr 01/20
FIGURE Engine Exhaust Velocities - Breakaway Power - RR Trent 700 Series Engine		Apr 01/20
Subject 6-1-4		
Engine Exhaust Temperatures Contours - Breakaway Power		Apr 01/20
FIGURE Engine Exhaust Temperatures - Breakaway Power - RR Trent 700 Series Engine		Apr 01/20
Subject 6-1-5		
Engine Exhaust Velocities Contours - Takeoff Power		Apr 01/20
FIGURE Engine Exhaust Velocities - Takeoff Power - RR Trent 700 Series Engine		Apr 01/20
Subject 6-1-6		
Engine Exhaust Temperatures Contours - Takeoff Power		Apr 01/20

CONTENT	CHG CODE	LAST REVISION DATE
FIGURE Engine Exhaust Temperatures - Takeoff Power - RR Trent 700 Series Engine		Apr 01/20
Subject 6-3-0		
Danger Areas of Engines		Apr 01/20
Subject 6-3-1		
Ground Idle Power		Apr 01/20
FIGURE Danger Areas of Engines - RR Trent 700 Series Engine		Apr 01/20
Subject 6-3-2		
Breakaway Power		Apr 01/20
FIGURE Danger Areas of Engines - RR Trent 700 Series Engine	R	Jul 01/23
Subject 6-3-3		
Take-Off Power		Apr 01/20
FIGURE Danger Areas of Engines - RR Trent 700 Series Engine	R	Jul 01/23
Subject 6-4-0		
APU Exhaust Velocities and Temperatures		Apr 01/20
Subject 6-4-1		
APU - GARRETT		Apr 01/20
FIGURE Exhaust Velocities and Temperatures - APU – GARRETT GTCP 331-350		Apr 01/20
Subject 6-5-0		
Pilot Visibility in Approach		Jun 01/20
FIGURE Pilot Visibility in Approach - Navigation Aids		Jun 01/20
<u>CHAPTER 7</u>		

CONTENT	CHG CODE	LAST REVISION DATE
Subject 7-1-0 General Information		Aug 01/22
Subject 7-2-0 Landing Gear Footprint FIGURE Landing Gear Footprint		Apr 01/20 Aug 01/22
Subject 7-3-0 Maximum Pavement Loads FIGURE Maximum Pavement Loads		Apr 01/20 Aug 01/22
Subject 7-4-0 Landing Gear Loading on Pavement		Aug 01/22
Subject 7-5-0 Flexible Pavement Requirements - US Army Corps of Engineers Design Method		Aug 01/22
Subject 7-6-0 Flexible Pavement Requirements - LCN Conversion		Aug 01/22
Subject 7-7-0 Rigid Pavement Requirements - Portland Cement Association Design Method		Aug 01/22
Subject 7-8-0 Rigid Pavement Requirements - LCN Conversion		Aug 01/22
Subject 7-9-0 ACN/PCN Reporting System - Flexible and Rigid Pavements		Aug 01/22
FIGURE Aircraft Classification Number - ACN Table		Aug 01/22
Subject 7-10-0		

CONTENT	CHG CODE	LAST REVISION DATE
ACR/PCR Reporting System - Flexible and Rigid Pavements		Aug 01/22
FIGURE ACR Table		Aug 01/22
CHAPTER 8		
Subject 8-0-0		
Scaled Drawings		Apr 01/20
FIGURE Scaled Drawing		Apr 01/20
CHAPTER 10		
Subject 10-0-0		
Aircraft Rescue and Fire Fighting		Jun 01/20
FIGURE Front Page		Apr 01/20
FIGURE Highly Flammable and Hazardous Materials and Components		Jun 01/20
FIGURE Batteries Location and Access		Apr 01/20
FIGURE Wheel/Brake Overheat - Wheel Safety Area		Jun 01/20
FIGURE Ground Lock Safety-Devices		Apr 01/20
FIGURE Emergency Evacuation Devices		Jun 01/20
FIGURE Sliding Windows Evacuation		Jun 01/20
FIGURE Belly-Door Exterior Control-Handle		Jun 01/20
FIGURE Belly-Door Interior Control-Handle		Jun 01/20
FIGURE Pressure Bulkhead Door		Jun 01/20

CONTENT	CHG CODE	LAST REVISION DATE
FIGURE Main-Deck Access Door		Jun 01/20
FIGURE Aft-Cargo-Compartment Door Controls		Apr 01/20
FIGURE Main-Deck Cargo Door-Control		Jun 01/20
FIGURE Control Panels		Jun 01/20
FIGURE APU Air Intake		Jun 01/20
FIGURE Ground Clearances		Apr 01/20
FIGURE Structural Break-in Points		Jun 01/20

TABLE OF CONTENTS

1	SCOPE
1-1-0	Purpose
1-2-1	Glossary
2	AIRCRAFT DESCRIPTION
2-1-1	General Aircraft Characteristics Data
2-2-0	General Aircraft Dimensions
2-3-0	Ground Clearances
2-4-1	Interior Arrangements - Plan View
2-6-1	Lower Deck Cargo Compartments
2-6-2	Main Deck Cargo Compartments
2-6-3	Main and Lower Deck Cross-sections
2-7-0	Door Clearances
2-9-0	Landing Gear
2-10-0	Exterior Lighting
2-11-0	Antennas and Probes Location
2-12-0	Engine and Nacelle
2-12-1	Auxiliary Power Unit
2-13-0	Levelling, symmetry and Alignment
2-14-0	Jacking for Maintenance
2-14-1	Jacking of the Landing Gear
3	AIRCRAFT PERFORMANCE
3-1-0	General Information
4	GROUND MANEUVERING
4-1-0	General Information
4-2-0	Turning Radii
4-3-0	Minimum Turning Radii
4-4-0	Visibility from Cockpit in Static Position
4-5-0	Runway and Taxiway Turn Paths
4-5-1	135° Turn - Runway to Taxiway
4-5-2	90° Turn - Runway to Taxiway
4-5-3	180° Turn on a Runway
4-5-4	135° Turn - Taxiway to Taxiway
4-5-5	90° Turn - Taxiway to Taxiway

4-6-0	Runway Holding Bay (Apron)
4-7-0	Minimum Line-Up Distance Corrections
4-8-0	Aircraft Mooring
5	TERMINAL SERVICING
5-1-0	Aircraft Servicing Arrangements
5-1-1	Symbols Used on Servicing Diagrams
5-1-2	Typical Ramp Layout - Open Apron
5-4-1	Ground Service Connections Layout
5-4-2	Grounding Points
5-4-3	Hydraulic System
5-4-4	Electrical System
5-4-5	Oxygen System
5-4-6	Fuel System
5-4-7	Pneumatic System
5-4-8	Oil System
5-4-10	Waste Water System
5-4-11	Cargo Control Panels
5-5-0	Engine Starting Pneumatic Requirements
5-6-0	Ground Pneumatic Power Requirements
5-7-0	Preconditioned Airflow Requirements
5-8-0	Ground Towing Requirements
5-9-0	De-Icing and External Cleaning
6	OPERATING CONDITIONS
6-1-0	Engine Exhaust Velocities and Temperatures
6-1-1	Engine Exhaust Velocities Contours - Ground Idle Power
6-1-2	Engine Exhaust Temperatures Contours - Ground Idle Power
6-1-3	Engine Exhaust Velocities Contours - Breakaway Power
6-1-4	Engine Exhaust Temperatures Contours - Breakaway Power
6-1-5	Engine Exhaust Velocities Contours - Takeoff Power
6-1-6	Engine Exhaust Temperatures Contours - Takeoff Power
6-3-0	Danger Areas of Engines
6-3-1	Ground Idle Power
6-3-2	Breakaway Power
6-3-3	Takeoff Power
6-4-0	APU Exhaust Velocities and Temperatures
6-4-1	APU
6-5-0	Pilot Visibility in Approach

7	PAVEMENT DATA
7-1-0	General Information
7-2-0	Landing Gear Footprint
7-3-0	Maximum Pavement Loads
7-4-0	Landing Gear Loading on Pavement
7-5-0	Flexible Pavement Requirements - U.S. Army Corps of Engineers Design Method
7-6-0	Flexible Pavement Requirements - LCN Conversion
7-7-0	Rigid Pavement Requirements - Portland Cement Association Design Method
7-8-0	Rigid Pavement Requirements - LCN Conversion
7-9-0	ACN/PCN Reporting System - Flexible and Rigid Pavements
7-10-0	ACR/PCR Reporting System - Flexible And Rigid Pavement
8	SCALED DRAWINGS
8-0-0	SCALED DRAWINGS
10	AIRCRAFT RESCUE AND FIRE FIGHTING
10-0-0	AIRCRAFT RESCUE AND FIRE FIGHTING

SCOPE**1-1-0 Purpose******ON A/C A330-700L**Introduction

1. The A330-700L AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING (AC) manual is issued for the A330-700L to give necessary data to airport operators, airlines and Maintenance/Repair Organizations (MRO) for airport and maintenance facilities planning.

The A330-700L is designed to replace the existing A300-600ST known as Beluga, to modernize and improve Airbus aircraft parts transportation. The A330-700L will offer a large volume in its main deck cargo compartment, which can carry a pair of A350 wings.

Correspondence concerning this publication should be directed to:

AIRBUS S.A.S.

Customer Services

Technical Data Support and Services

1, Rond Point Maurice BELLONTE

31707 BLAGNAC CEDEX

FRANCE

1-2-1 Glossary****ON A/C A330-700L**Glossary

1. List of Abbreviations

A/C	Aircraft
AC	Aircraft Characteristics manual
ACN	Aircraft Classification Number
ACR	Aircraft Classification Rating
AMM	Aircraft Maintenance Manual
APU	Auxiliary Power Unit
C/L	Center Line
CBR	California Bearing Ratio
CC	Cargo Compartment
CG	Center of Gravity
CKPT	Cockpit
E	Young's Modulus
ELEC	Electric, Electrical, Electricity
ESWL	Equivalent Single Wheel Load
FAA	Federal Aviation Administration
FDL	Fuselage Datum Line
FR	Frame
FSTE	Full Size Trolley Equivalent
FWD	Forward
GPU	Ground Power Unit
GSE	Ground Support Equipment
HYD	Hydraulic
ICAO	International Civil Aviation Organisation
IDG	Integrated Drive Generator
ISA	International Standard Atmosphere
L	Radius of relative stiffness
LCN	Load Classification Number
LD	Load Device
LD	Lower Deck
LDG	Landing Gear
LH	Left Hand
LMLG	Left Main Landing Gear

MAC	Mean Aerodynamic Chord
MAX	Maximum
MD	Main Deck
MDCC	Main Deck Cargo Compartment
MIN	Minimum
MLG	Main Landing Gear
NLG	Nose Landing Gear
OAT	Outside Air Temperature
PCA	Portland Cement Association
PCN	Pavement Classification Number
PCR	Pavement Classification Rating
PLU	Power Locking Unit
RH	Right Hand
RMLG	Right Main Landing Gear
ULD	Unit Load Device
WV	Weight Variant

2. Design Weight Terminology

- Maximum Design Ramp Weight (MRW):
Maximum weight for ground maneuver (including weight of taxi and run-up fuel) as limited by aircraft strength and airworthiness requirements. It is also called Maximum Design Taxi Weight (MTW).
- Maximum Design Landing Weight (MLW):
Maximum weight for landing as limited by aircraft strength and airworthiness requirements.
- Maximum Design Take-Off Weight (MTOW):
Maximum weight for take-off as limited by aircraft strength and airworthiness requirements. (This is the maximum weight at start of the take-off run).
- Maximum Design Zero Fuel Weight (MZFW):
Maximum permissible weight of the aircraft without usable fuel.
- Usable Volume:
Usable volume available for cargo, pressurized fuselage, passenger compartment and cockpit.
- Water Volume:
Maximum volume of cargo compartment.
- Usable Fuel:
Fuel available for aircraft propulsion.

AIRCRAFT DESCRIPTION**2-1-1 General Aircraft Characteristics Data******ON A/C A330-700L****General Aircraft Characteristics Data**

1. The following table gives characteristics of A330-700L model, these data are specific to each weight variant:

Aircraft Characteristics		
	WV000	WV001
Maximum Ramp Weight (MRW)	227 900 kg (502 433 lb)	205 900 kg (453 932 lb)
Maximum Take-Off Weight (MTOW)	227 000 kg (500 449 lb)	205 000 kg (451 948 lb)
Maximum Landing Weight (MLW)	187 000 kg (412 264 lb)	187 000 kg (412 264 lb)
Maximum Zero Fuel Weight (MZFW)	178 000 kg (392 423 lb)	178 000 kg (392 423 lb)
Estimated Maximum Payload	50 500 kg (111 333 lb)	50 500 kg (111 333 lb)
Operating Weight Empty (OWE)	127 500 kg (281 089 lb)	127 500 kg (281 089 lb)

2. The following table gives characteristics of A330-700L model, these data are common to each weight variant:

Aircraft Characteristics	
Seats in courier area	4
Usable Fuel Capacity (density = 0.785 kg/l)	73 000 kg (160 937 lb)
Pressurized Fuselage Volume	87.4 m ³ (3087 ft ³)
Cockpit Volume	5.75 m ³ (203 ft ³)
Main-Deck Cargo-Compartment Water Volume	2 209 m ³

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

Aircraft Characteristics	
	(78 010 ft ³)
Usable Volume, AFT CC	60.7 m ³ (2 144 ft ³)
Usable Volume, Bulk CC	19.7 m ³ (696 ft ³)
Water Volume, AFT CC	85.7 m ³ (3 026 ft ³)
Water Volume, Bulk CC	22.7 m ³ (802 ft ³)


2-2-0 General Aircraft Dimensions****ON A/C A330-700L**General Aircraft Dimensions

1. This section gives general aircraft dimensions.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

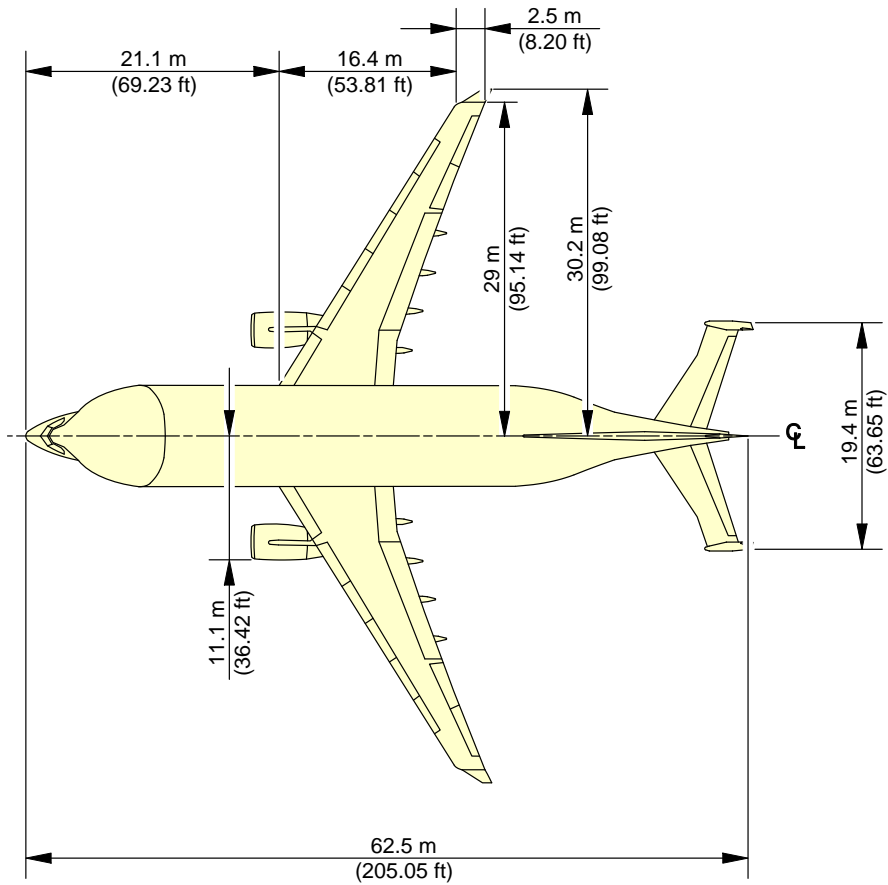

NOTE:
RELATED TO AIRCRAFT ATTITUDE AND WEIGHT.

F_AC_020200_1_0130101_01_00


General Aircraft Dimensions
(Sheet 1 of 2)
FIGURE-2-2-0-991-013-A01

2-2-0

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

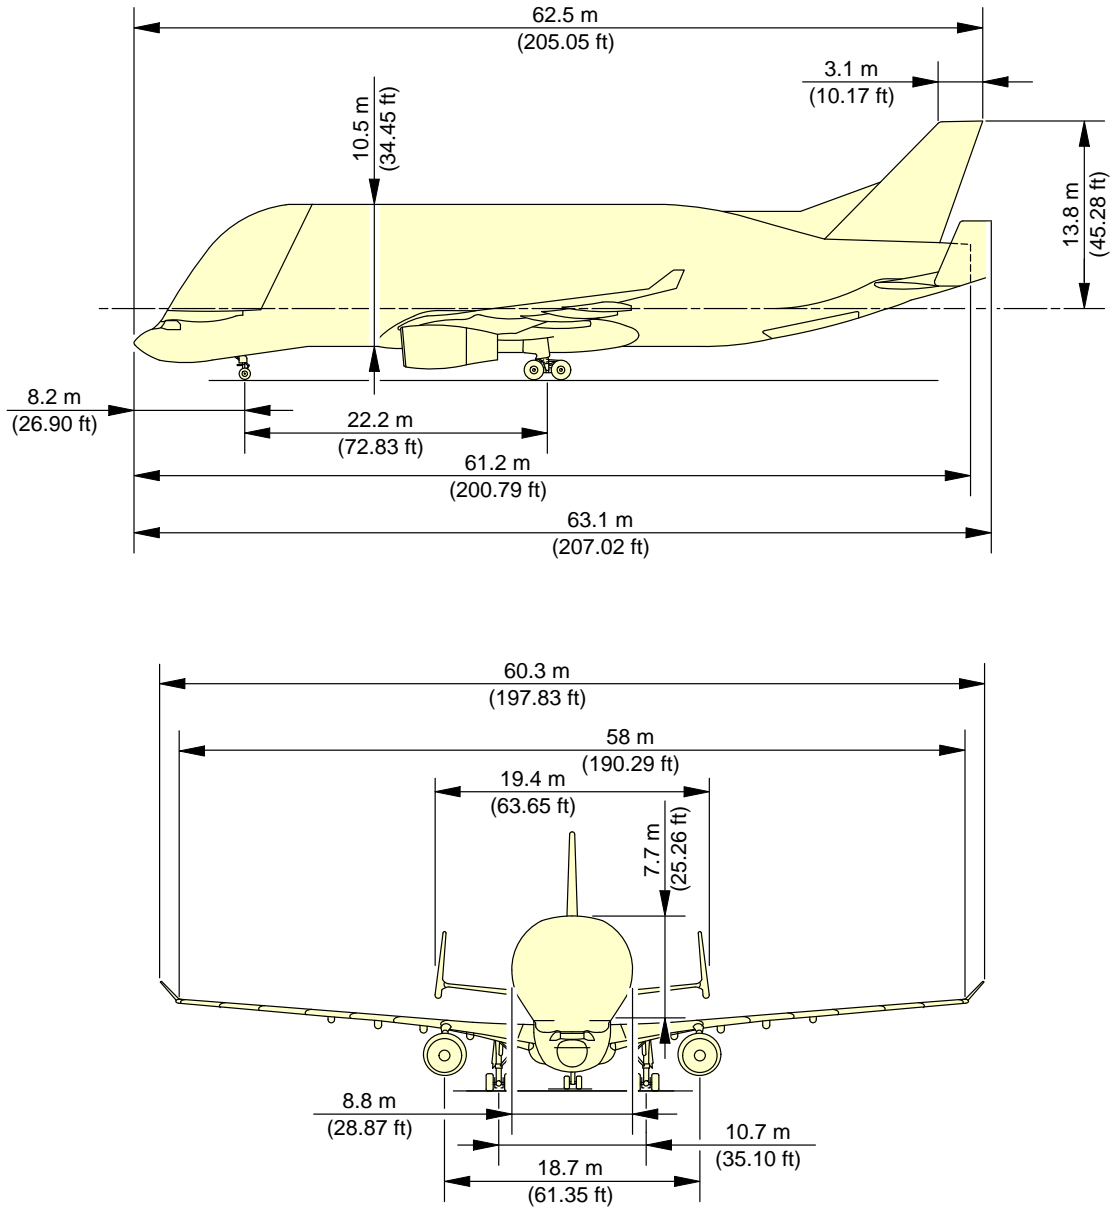

NOTE:
RELATED TO AIRCRAFT ATTITUDE AND WEIGHT.

F_AC_020200_1_0130102_01_00

General Aircraft Dimensions
(Sheet 2 of 2)
FIGURE-2-2-0-991-013-A01

2-3-0 Ground Clearances****ON A/C A330-700L**Ground Clearances

1. This section gives the height of various points of the aircraft, above the ground, for different aircraft configurations.

Dimensions in the tables can change with tire type, weight and balance and other special conditions.

NOTE : Tire pressure and shock absorbers are fixed in the standard condition.

The dimensions are given for the weight variant WV000:


- A light weight 135 000 kg (297 624 lb), with a FWD CG and an AFT CG,
- An aircraft at MRW 227 000 kg (500 449 lb) with a FWD CG and an AFT CG,
- Aircraft on jacks, FDL at 6.515 m (21.37 ft).

NOTE : Cargo door ground clearances are measured from the floor level.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

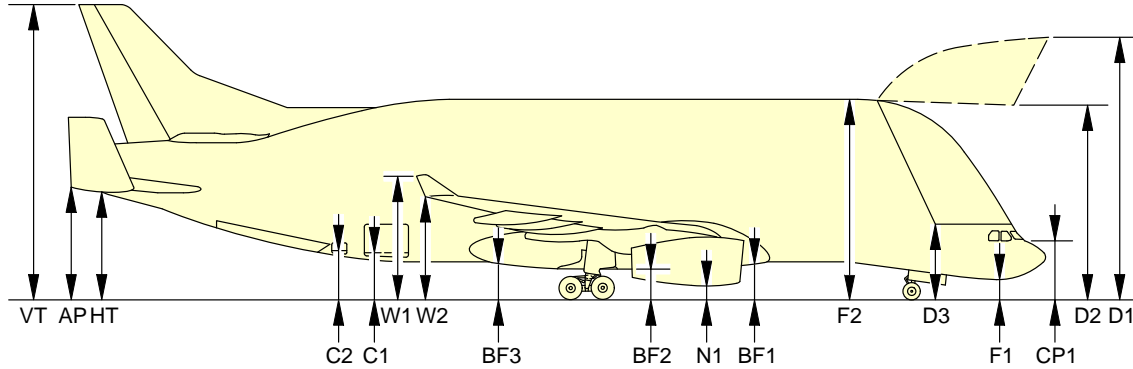

A/C CONFIGURATION FOR WV000		MRW 227 000 kg (500 450 lb)				135 000 kg (297 625 lb)			
		FWD CG (20.5%)		AFT CG (28%)		FWD CG (18%)		AFT CG (25%)	
		m	ft	m	ft	m	ft	m	ft
FUSELAGE	F2	12.90	42.32	12.94	42.45	13.02	42.72	13.06	42.85
	F1	1.20	3.94	1.27	4.17	1.28	4.20	1.35	4.43
	D1	17.10	56.10	17.18	56.36	17.18	56.36	17.25	56.59
	D2	12.28	40.29	12.35	40.52	12.37	40.58	12.43	40.78
	D3	5.01	16.44	5.09	16.70	5.09	16.70	5.16	16.93
	CP1	3.69	12.11	3.76	12.34	3.77	12.37	3.84	12.60
	BF1	1.94	6.36	1.95	6.40	2.11	6.92	2.12	6.96
	BF2	1.93	6.33	1.93	6.33	2.11	6.92	2.11	6.92
	BF3	1.95	6.40	1.94	6.36	2.15	7.05	2.14	7.02
	HT	6.84	22.44	6.74	22.11	7.16	23.49	7.06	23.16
AP	7.39	24.25	7.28	23.88	7.71	25.30	7.60	24.93	
VT	18.89	61.98	18.79	61.65	19.21	63.02	19.10	62.66	
DOORS	C1	3.07	10.07	3.03	9.94	3.31	10.86	3.27	10.73
	C2	3.10	10.17	3.05	10.01	3.36	11.02	3.30	10.83
WINGS	W1	7.94	26.05	7.91	25.95	8.18	26.84	8.14	26.71
	W2	6.58	21.59	6.54	21.46	6.81	22.34	6.77	22.21
ENGINE	N1	0.88	2.89	0.89	2.92	1.04	3.41	1.05	3.44

NOTE:

CARGO DOOR GROUND CLEARANCES ARE MEASURED FROM FLOOR LEVEL.
THE VALUES GIVEN IN THE TABLE DEPEND ON THE POSITION OF
THE CENTER OF GRAVITY (CG) AND ON THE AIRCRAFT WEIGHT.


F_AC_020300_1_0450101_01_01

Ground Clearances
Ground Clearances for WV000 at MRW and 135 000 kg (297 624 lb)
FIGURE-2-3-0-991-045-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

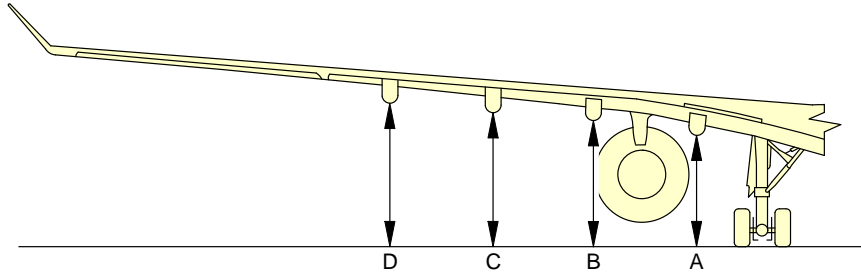

FLAP TRACKS RETRACTED						
AIRCRAFT TYPE	DESCRIPTION		MRW CG 20.5%		MRW CG 28%	
			m	ft	m	ft
A330-700L	FLAP TRACK 2	A	3.75	12.30	3.74	12.27
	FLAP TRACK 3	B	4.26	13.98	4.25	13.94
	FLAP TRACK 4	C	4.51	14.80	4.49	14.73
	FLAP TRACK 5	D	4.88	16.01	4.85	15.91

NOTE:

THE VALUES GIVEN IN THE TABLE DEPEND ON THE POSITION OF THE CENTER OF GRAVITY (CG) AND ON THE AIRCRAFT WEIGHT.


F_AC_020300_1_0470101_01_01

Ground Clearances
Ground Clearances for Flaps Retracted with WV000
FIGURE-2-3-0-991-047-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

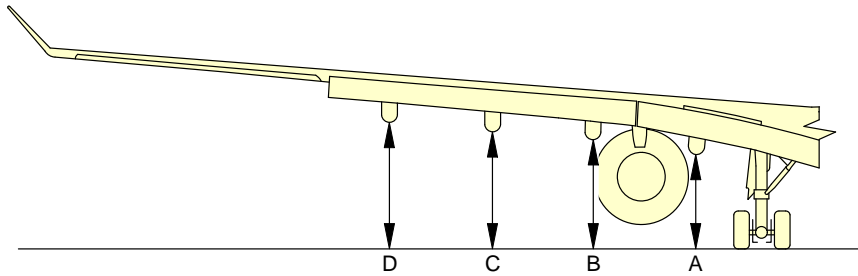

FLAP TRACKS 1+F						
AIRCRAFT TYPE	DESCRIPTION		MRW CG 20.5%		MRW CG 28%	
			m	ft	m	ft
A330-700L	FLAP TRACK 2	A	3.48	11.42	3.37	11.06
	FLAP TRACK 3	B	3.99	13.09	3.88	12.73
	FLAP TRACK 4	C	4.24	13.91	4.12	13.52
	FLAP TRACK 5	D	4.61	15.12	4.48	14.70

NOTE:

THE VALUES GIVEN IN THE TABLE DEPEND ON THE POSITION OF THE CENTER OF GRAVITY (CG) AND ON THE AIRCRAFT WEIGHT.


F_AC_020300_1_0480101_01_01

Ground Clearances
Ground Clearances for Flaps in Intermediate Position with WV000
FIGURE-2-3-0-991-048-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

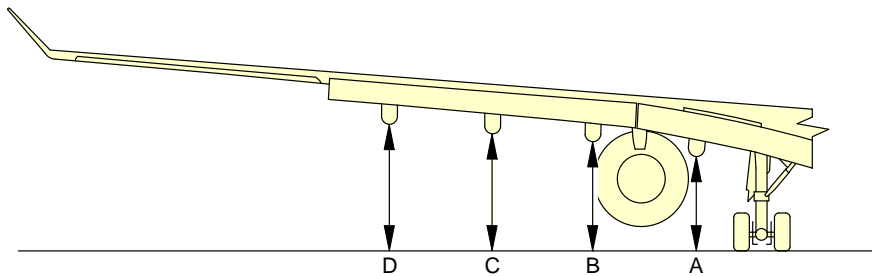

FLAP TRACKS EXTENDED						
AIRCRAFT TYPE	DESCRIPTION		MRW CG 20.5%		MRW CG 28%	
			m	ft	m	ft
A330-700L	FLAP TRACK 2	A	2.82	9.25	2.81	9.22
	FLAP TRACK 3	B	3.33	10.93	3.32	10.89
	FLAP TRACK 4	C	3.58	11.75	3.56	11.68
	FLAP TRACK 5	D	3.95	12.96	3.92	12.86

NOTE:

THE VALUES GIVEN IN THE TABLE DEPEND ON THE POSITION OF THE CENTER OF GRAVITY (CG) AND ON THE AIRCRAFT WEIGHT.

F_AC_020300_1_0490101_01_01

Ground Clearances
Ground Clearances for Flaps Fully Extended with WV000
FIGURE-2-3-0-991-049-A01


2-4-1 Interior Arrangements - Plan View****ON A/C A330-700L**Interior Arrangements - Plan View

1. This section gives the interior configuration of courier area showing the width of passway.




A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

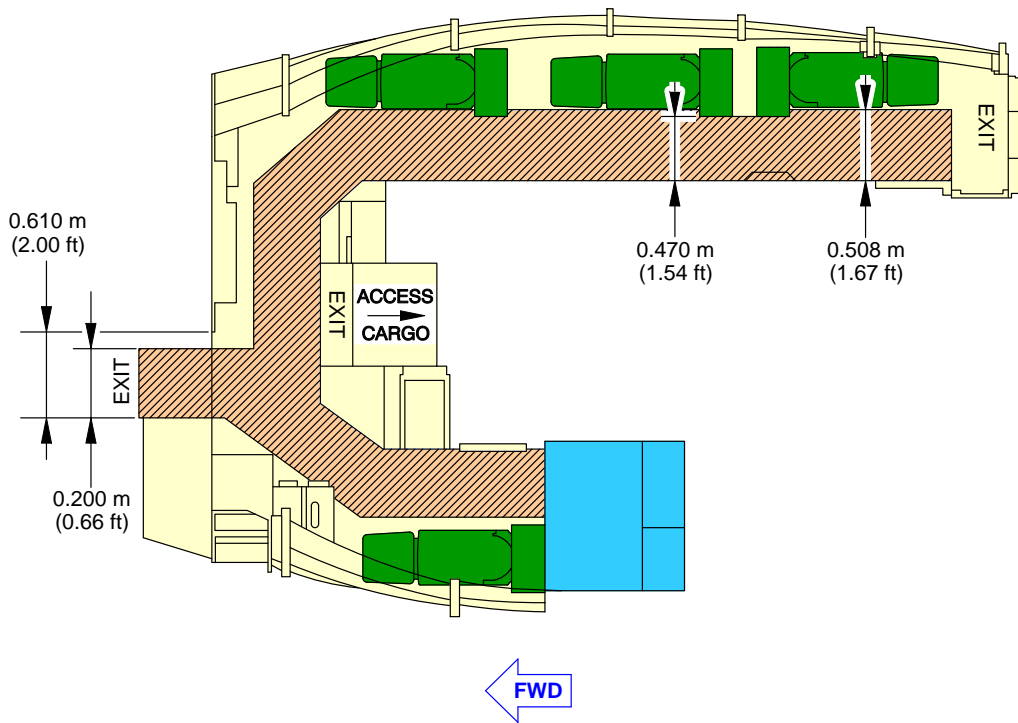****ON A/C A330-700L**



NOTE:

-  SEAT
-  LAVATORY
-  COURIER AREA

F_AC_020401_1_0100101_01_00

Interior Arrangements - Plan View
FIGURE-2-4-1-991-010-A01


2-6-1 Lower Deck Cargo Compartments****ON A/C A330-700L**Lower Deck Cargo Compartments

1. This section gives the following data about lower deck cargo compartments:
 - Location and dimensions
 - Loading combinations.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

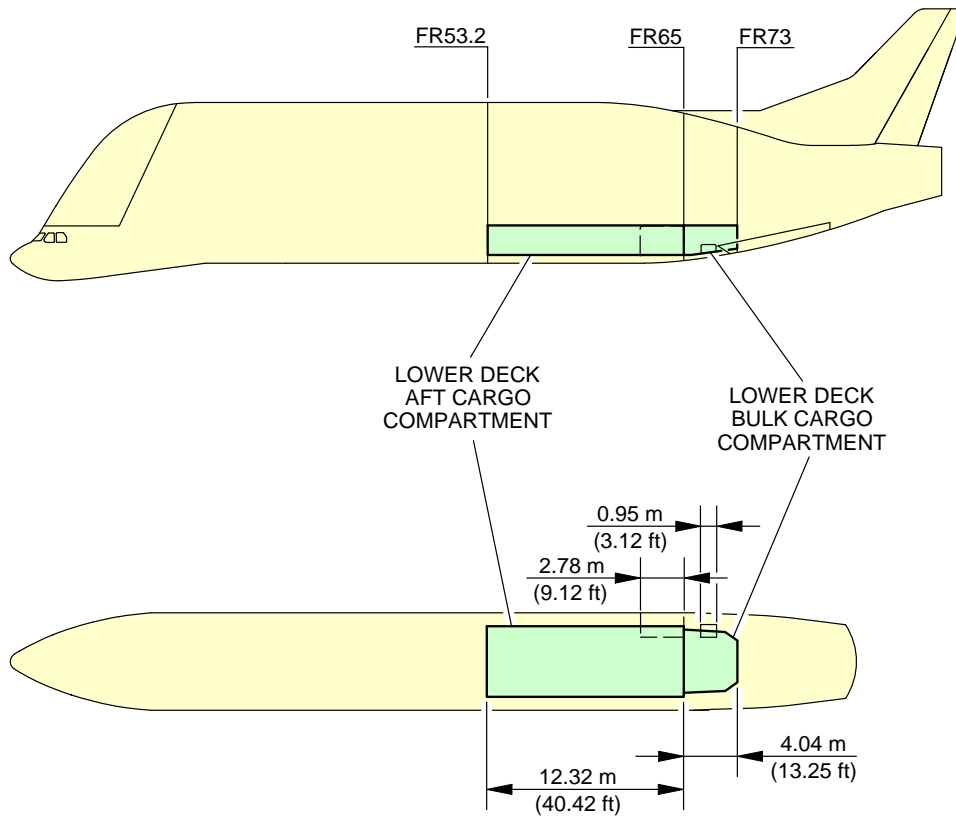


F_AC_020601_1_0130101_01_00

Lower Deck Cargo Compartments
Location and Dimensions (Sheet 1 of 2)
FIGURE-2-6-1-991-013-A01


A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**



14 LD3 60.4 in X 61.5 in



5 PALLETS 88 in X 125 in



4 PALLETS 96 in X 125 in

F_AC_020601_1_0130102_01_00

Lower Deck Cargo Compartments
Loading Combinations (Sheet 2 of 2)
FIGURE-2-6-1-991-013-A01


2-6-2 Main Deck Cargo Compartments****ON A/C A330-700L**Main Deck Cargo Compartment

1. This section gives the following data about the main-deck cargo compartment:
 - Location and dimensions.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

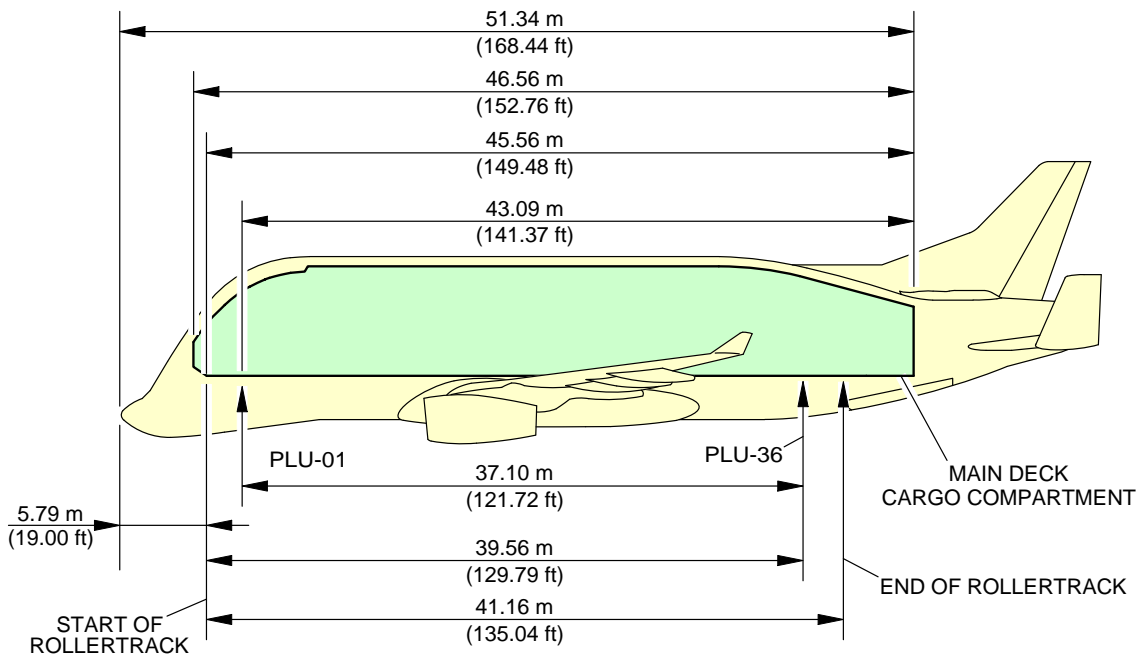

F_AC_020602_1_0070101_01_00


Main-Deck Cargo Compartment
Location and Dimensions
FIGURE-2-6-2-991-007-A01

2-6-3 Main and Lower Deck Cross-sections****ON A/C A330-700L**Main and Lower Deck Cross-sections


1. This section gives main and lower deck cross-sections for cargo version.

****ON A/C A330-700L**

REFERENCE CARGO CONFIGURATION LAYOUT

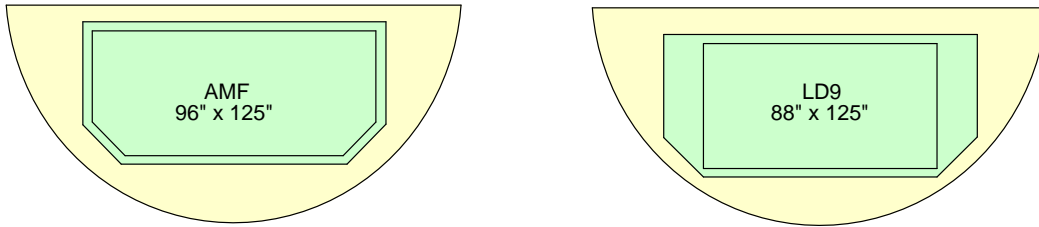

OPTIONAL CARGO CONFIGURATIONS

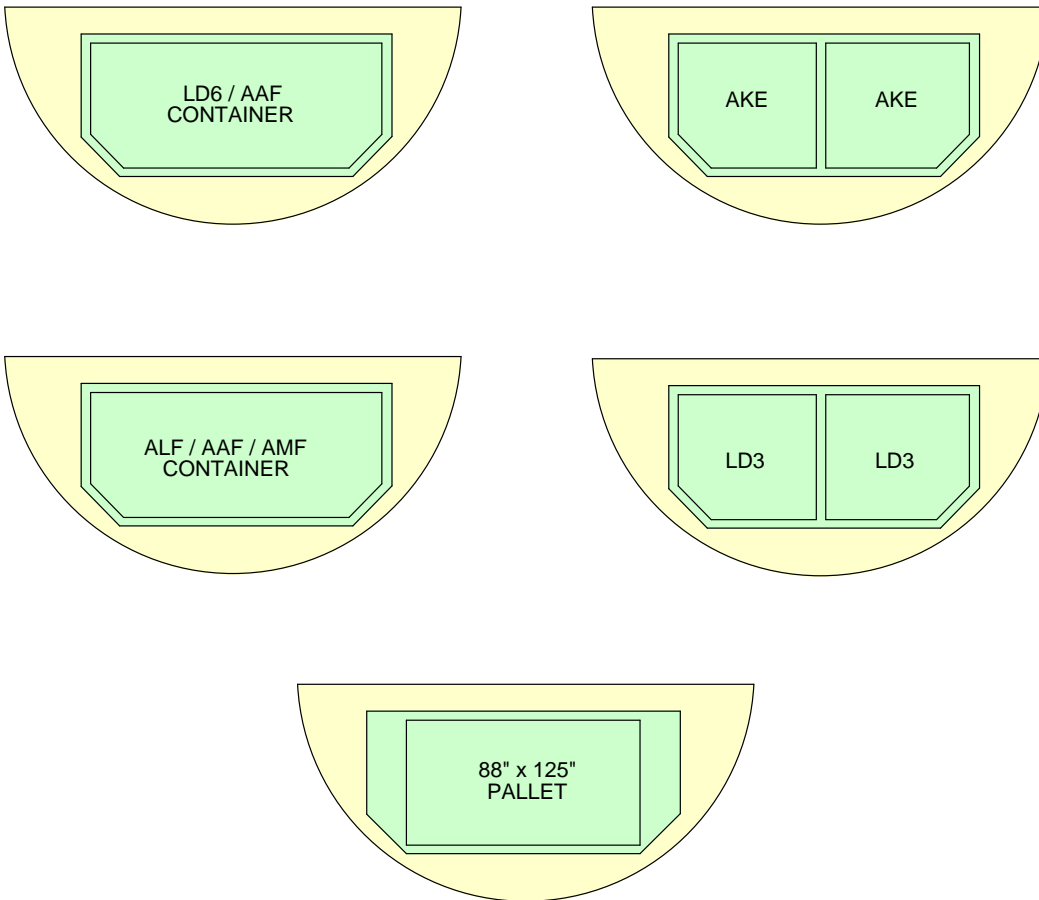


F_AC_020603_1_0020101_01_00

Lower-Deck Cargo Cross-sections
FIGURE-2-6-3-991-002-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

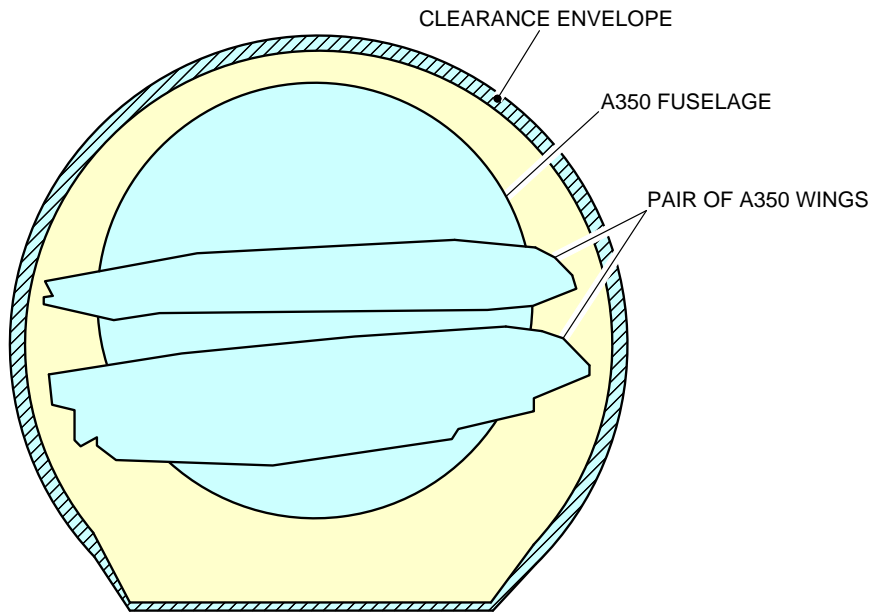

F_AC_020603_1_0030101_01_00

Main-Deck-Cargo Arrangement Cross-sections
FIGURE-2-6-3-991-003-A01


2-7-0 Door Clearances****ON A/C A330-700L**Door Clearances

1. This section gives door location, identification and clearances.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING


****ON A/C A330-700L**

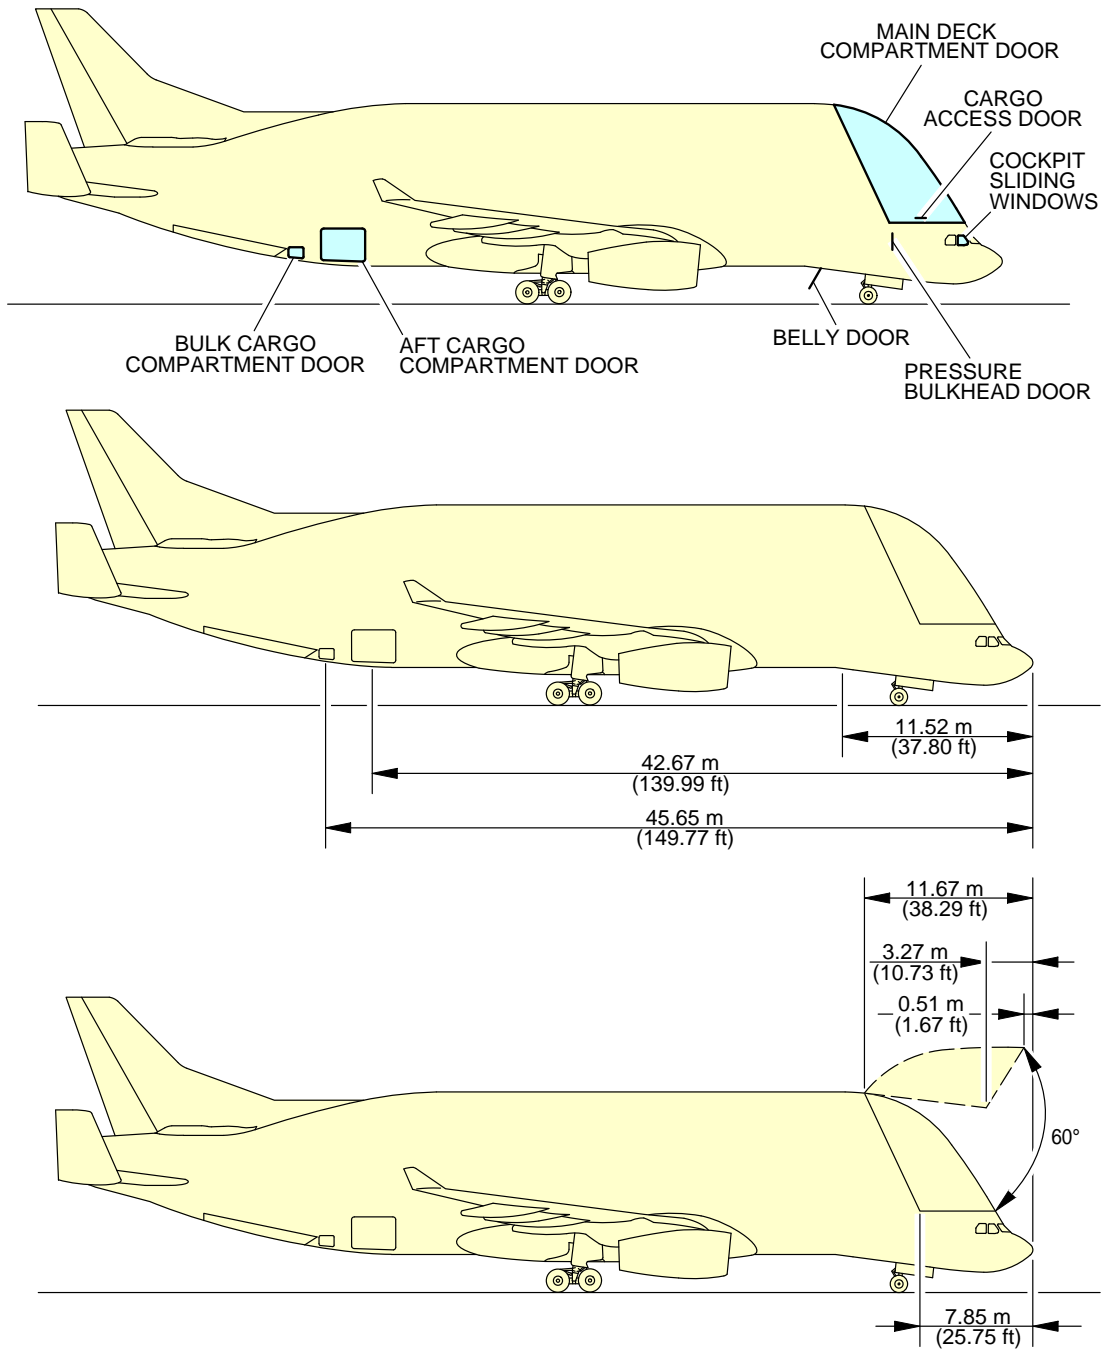

F_AC_020700_1_0550101_01_00

Lateral Position of Doors from Aircraft Nose
FIGURE-2-7-0-991-055-A01


****ON A/C A330-700L**

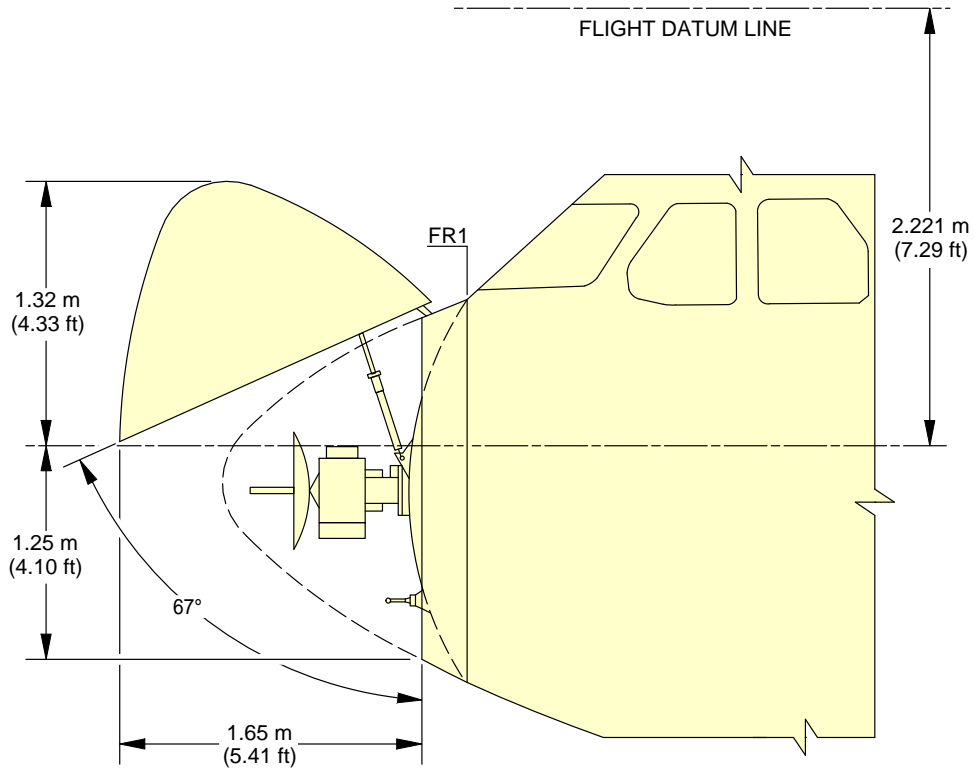

F_AC_020700_1_0560101_01_01

Radome
FIGURE-2-7-0-991-056-A01



****ON A/C A330-700L**

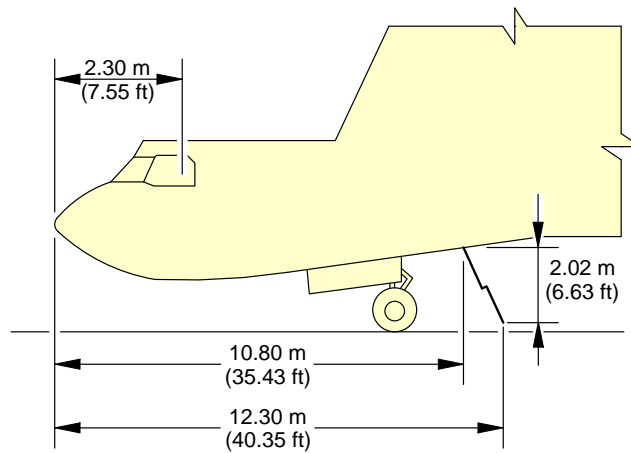

F_AC_020700_1_0600101_01_00

Belly Door and Sliding Windows
FIGURE-2-7-0-991-060-A01

****ON A/C A330-700L**

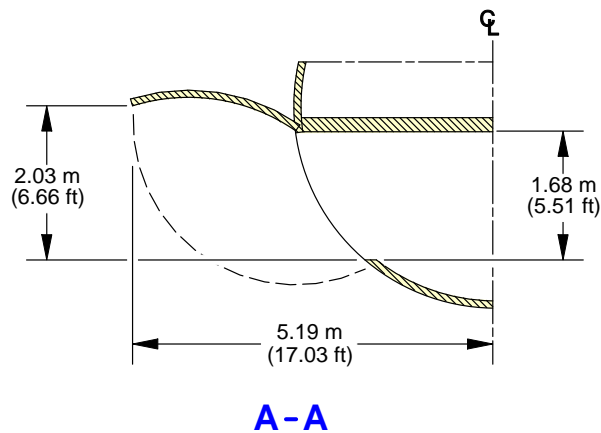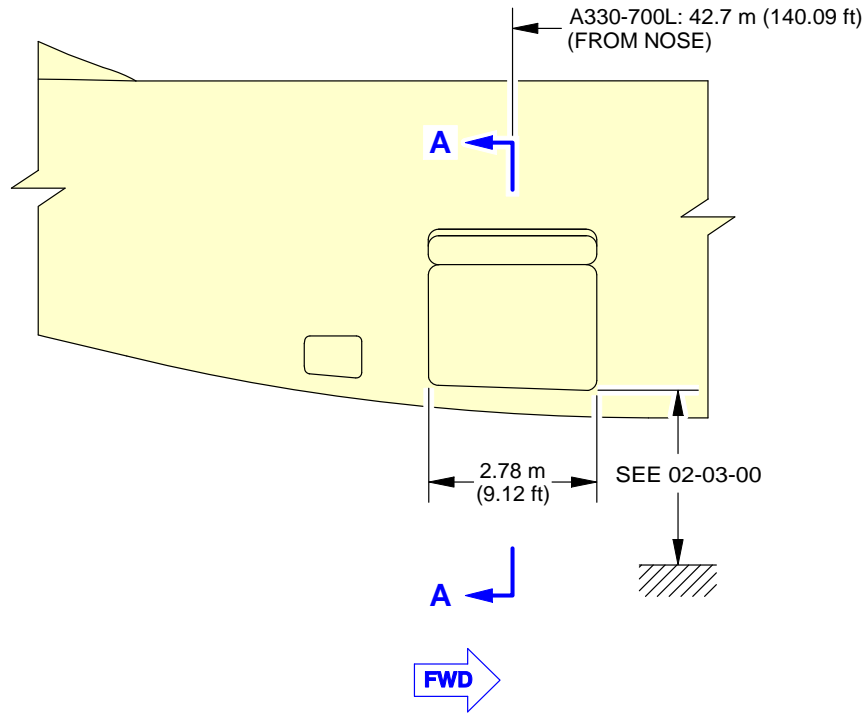


F_AC_020700_1_0570101_01_00

Aft Cargo-Compartment Door
FIGURE-2-7-0-991-057-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

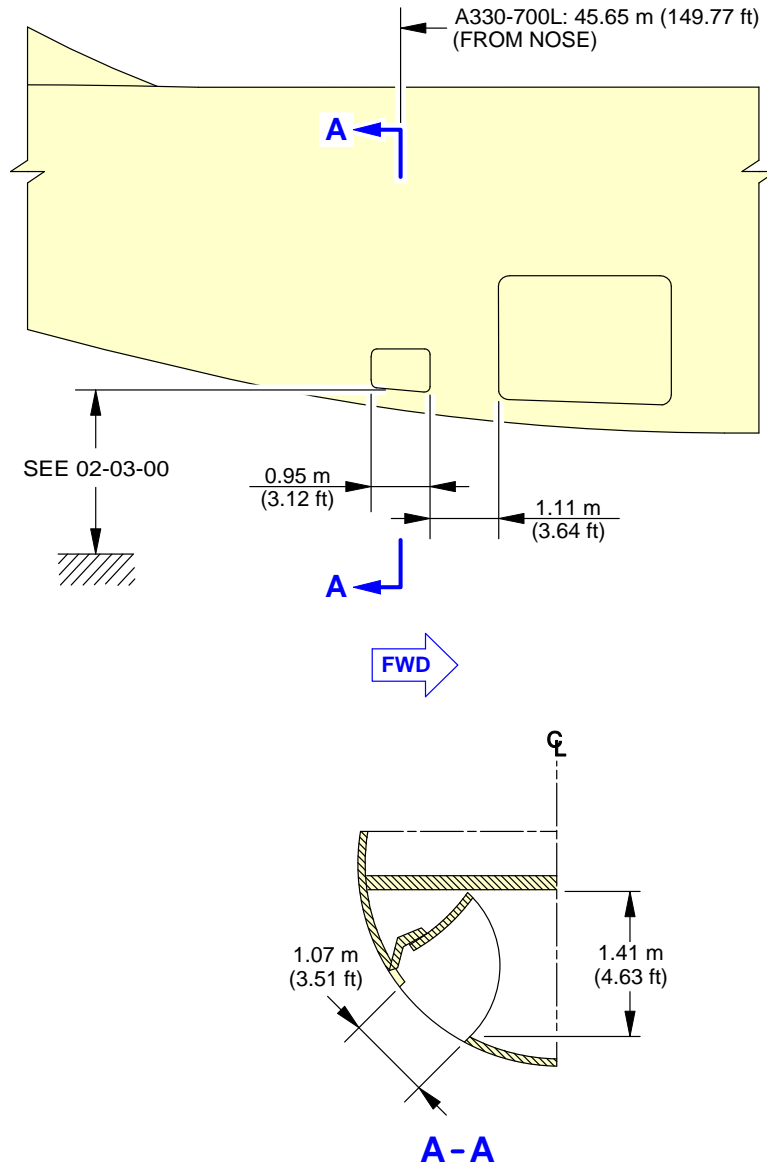



F_AC_020700_1_0580101_01_00

Bulk Cargo-Compartment Door
FIGURE-2-7-0-991-058-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

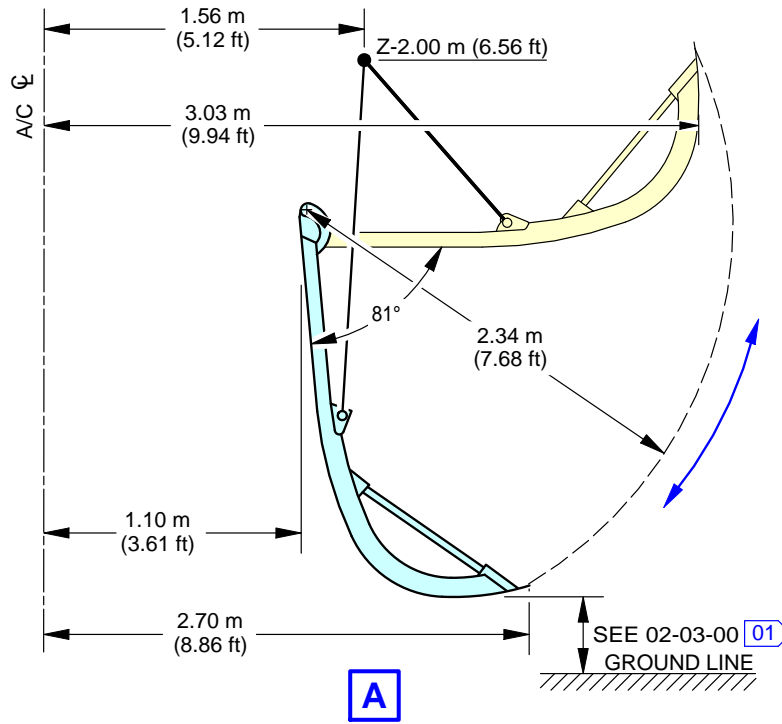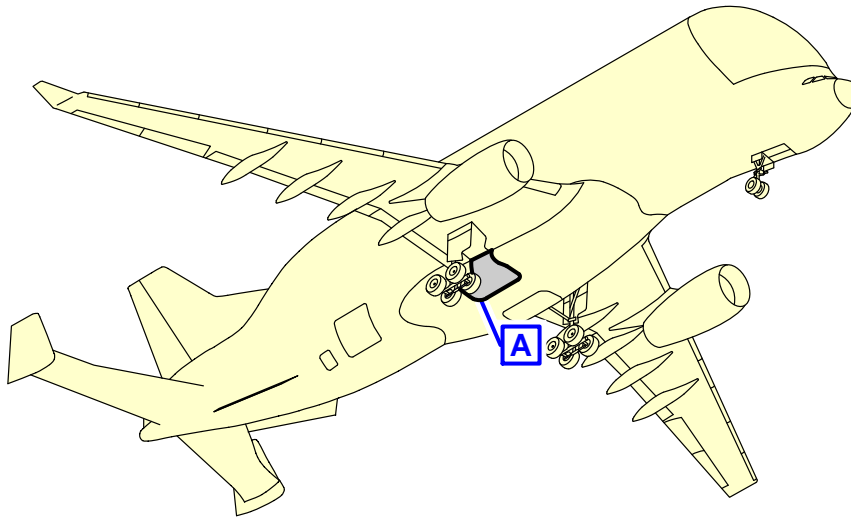

A
RH SHOWN
LH SYMMETRICAL

NOTE:

01 DEPENDING ON CG POSITION AND AIRCRAFT WEIGHT.

F_AC_020700_1_0590101_01_00

MLG Doors
FIGURE-2-7-0-991-059-A01

2-9-0 Landing Gear****ON A/C A330-700L**Landing Gear

1. General

All dimensions shown are minimum dimensions with zero clearances.

Dimensions for elevators and related mechanisms must be added to the following figures.

A. Elevators

These can be either mechanical or hydraulic. Elevators are used to:

- Let easy movement of persons and equipment around the main landing gears
- Lift and remove the landing gear assemblies out of the pits.

B. Jacking

The aircraft must be in position over the pits to put the gear on the elevators. Jacks must be installed and engaged with all the jacking points (Ref. Section 2-14 for Jacking).


Jacks must support the total aircraft weight i.e. when the landing gears do not touch the elevators on retraction/extension tests.

When tripod support jacks are used, the tripod-base circle radius must be small because the locations required for positioning the jacks are close to the sides of the pits.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

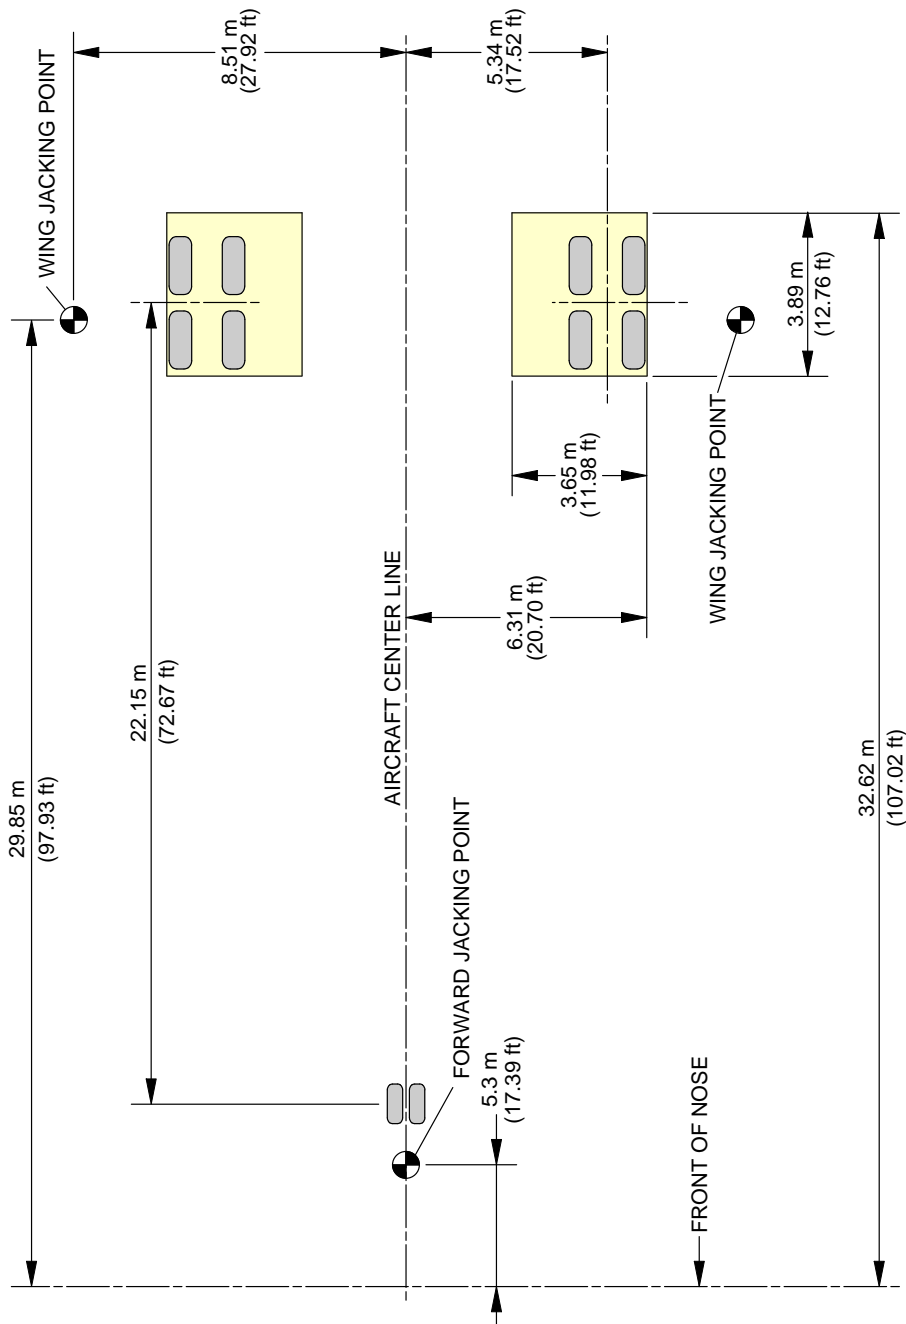

NOTE: ENVELOPES SHOWN WITH ZERO CLEARANCE TO OUTSIDE EDGE OF TIRES.


F_AC_020900_1_0210101_01_01

Landing Gear Position
FIGURE-2-9-0-991-021-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

**ON A/C A330-700L

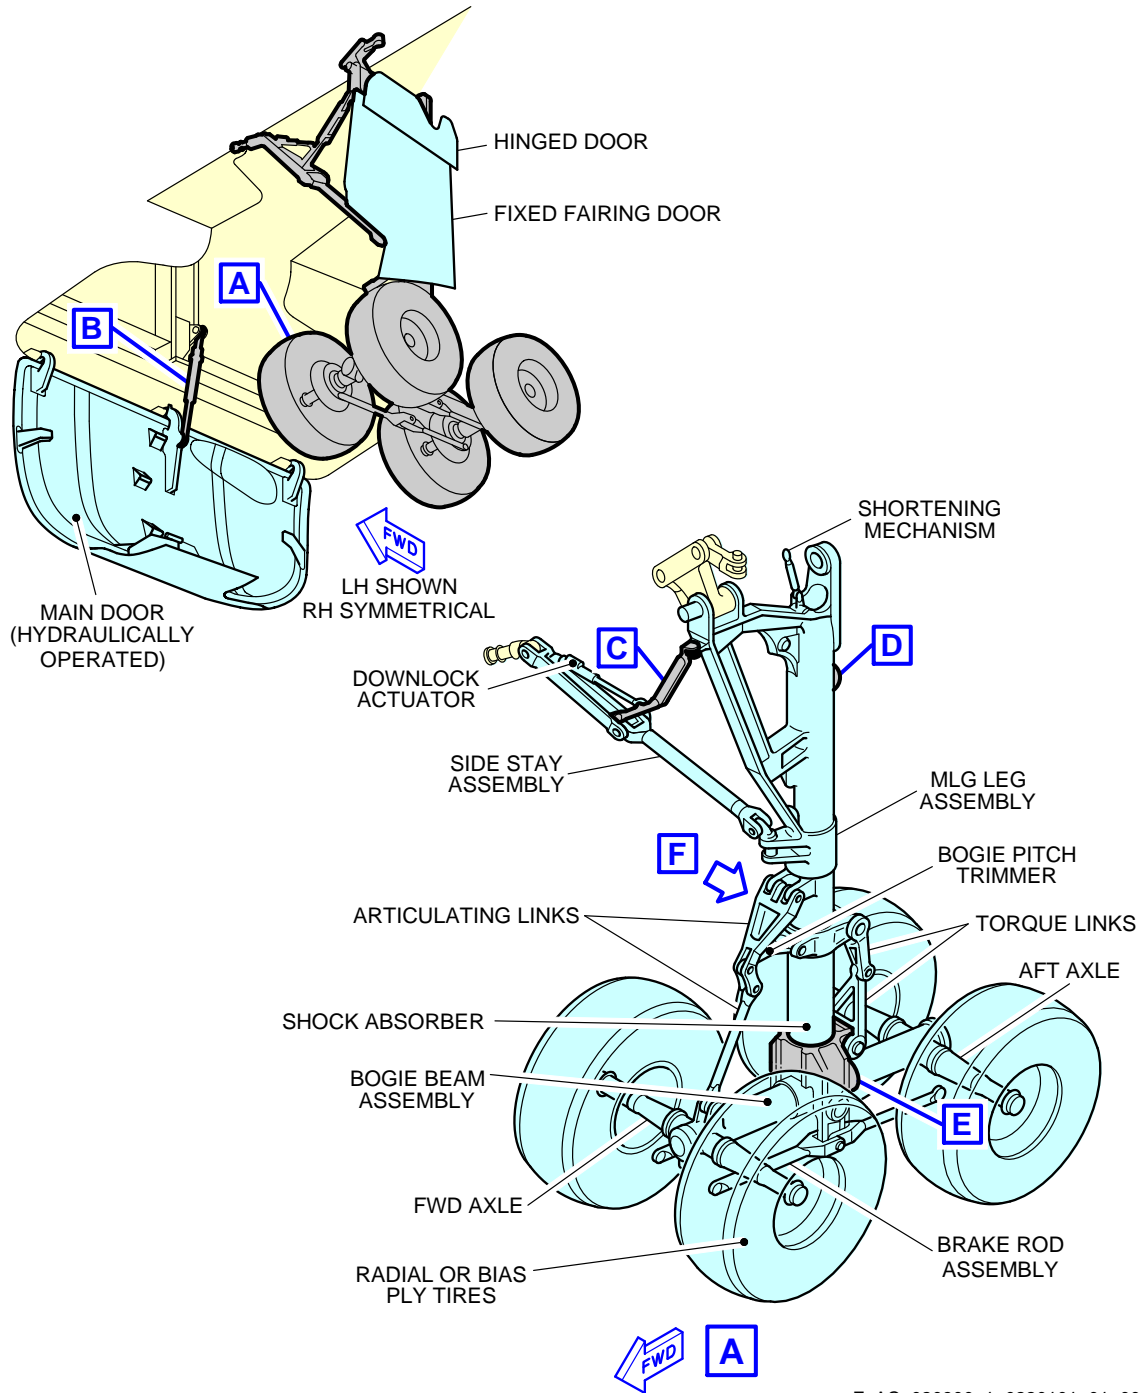



F_AC_020900_1_0220101_01_00

Main Landing Gear
(Sheet 1 of 3)
FIGURE-2-9-0-991-022-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

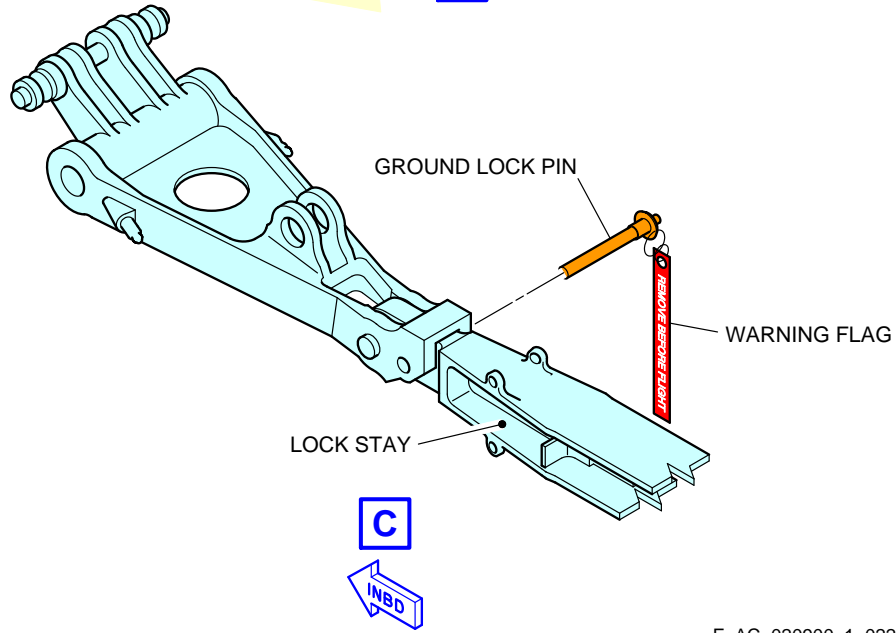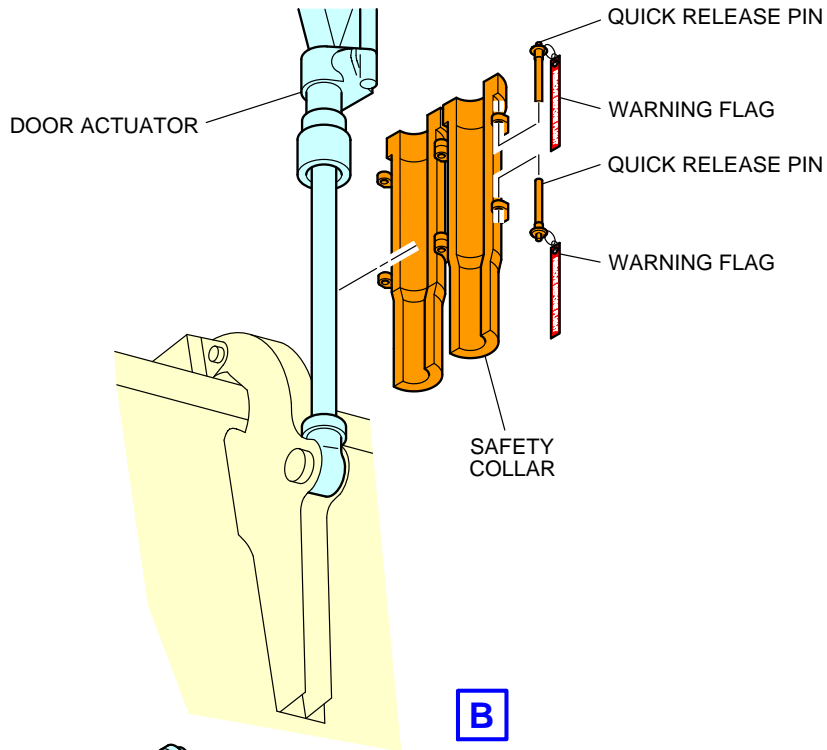


F_AC_020900_1_0220102_01_00

Main Landing Gear
Mechanical locking of MLG (Sheet 2 of 3)
FIGURE-2-9-0-991-022-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

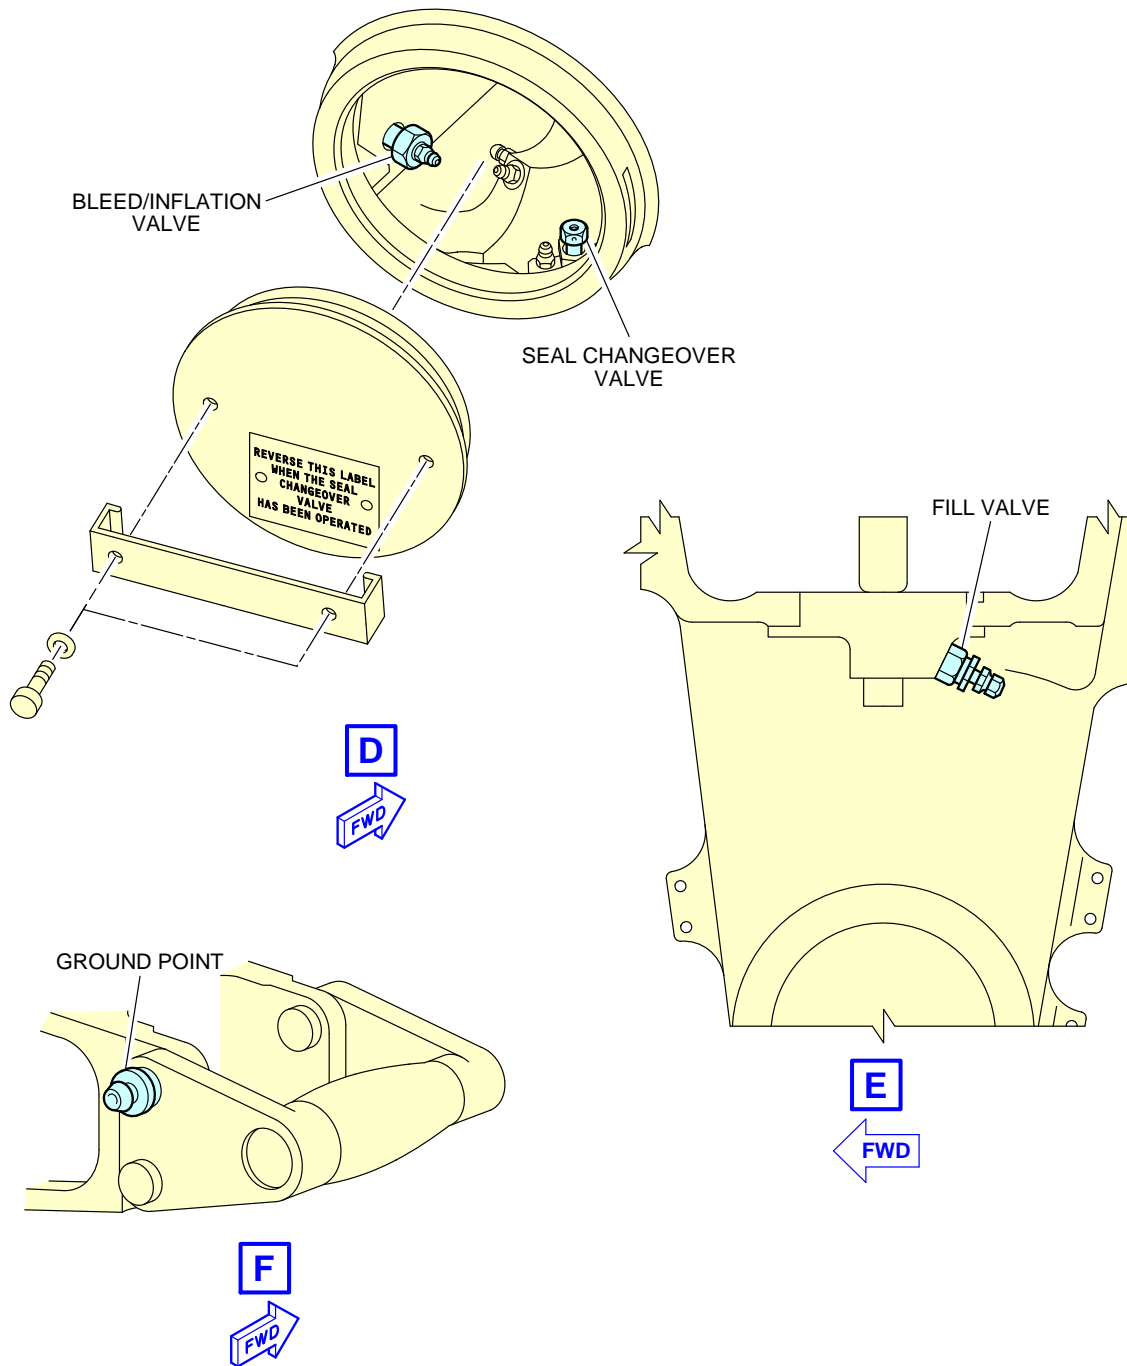


F_AC_020900_1_0220103_01_00

Main Landing Gear
MLG Servicing (Sheet 3 of 3)
FIGURE-2-9-0-991-022-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

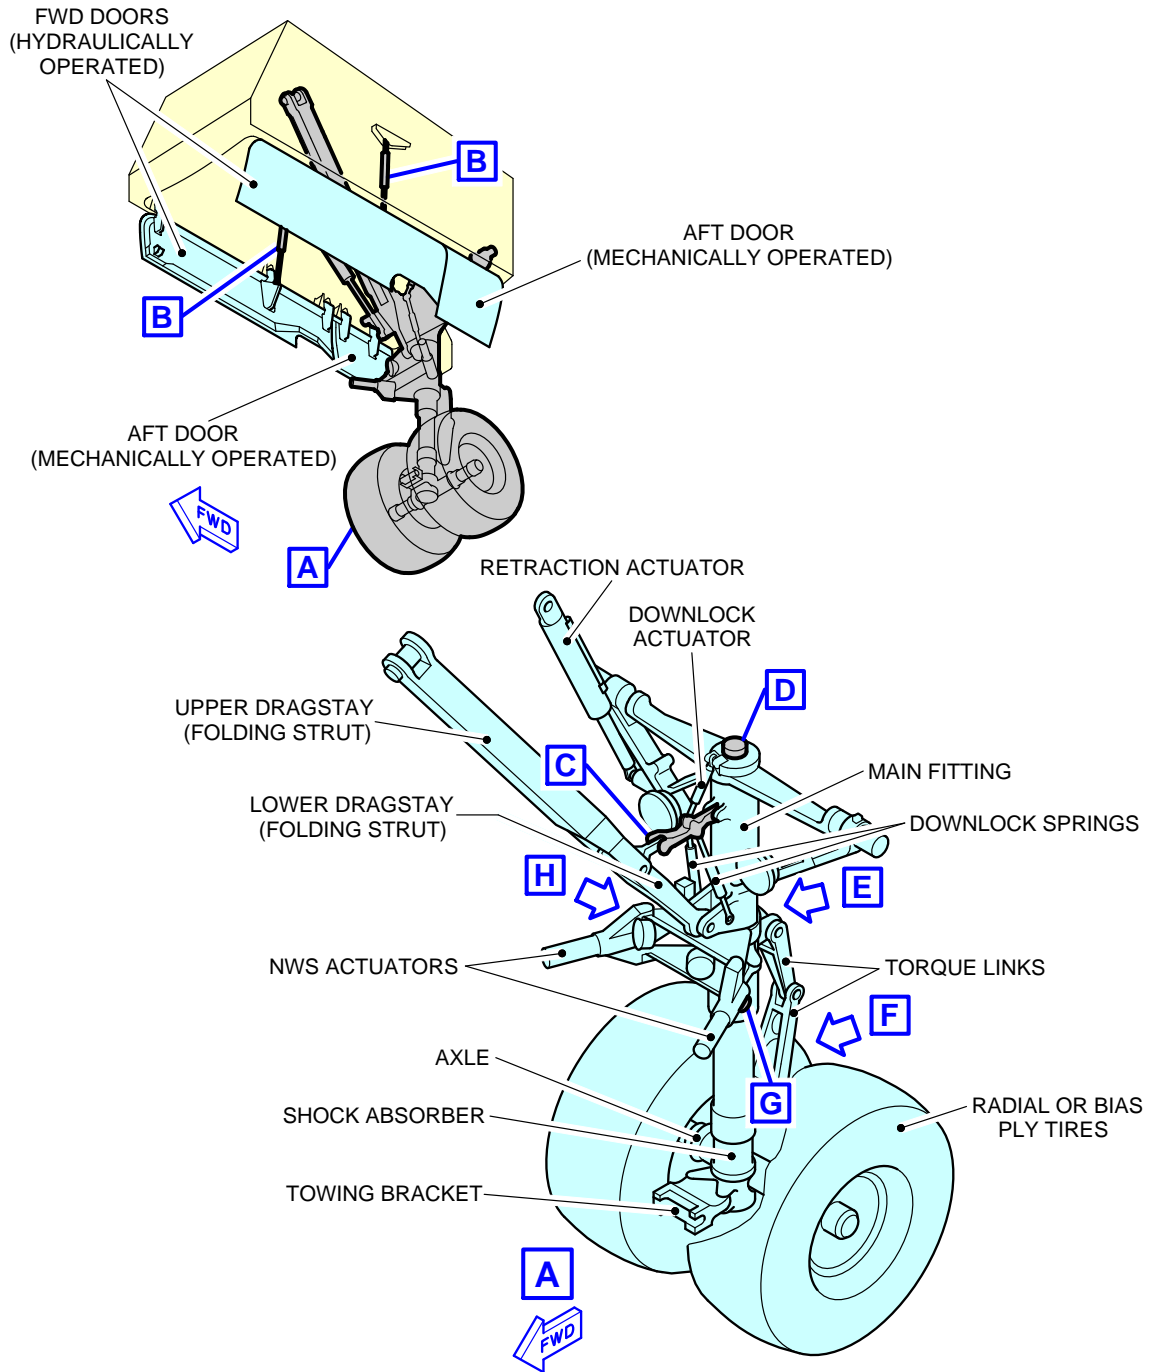



F_AC_020900_1_0230101_01_00

Nose Landing Gear
(Sheet 1 of 4)
FIGURE-2-9-0-991-023-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

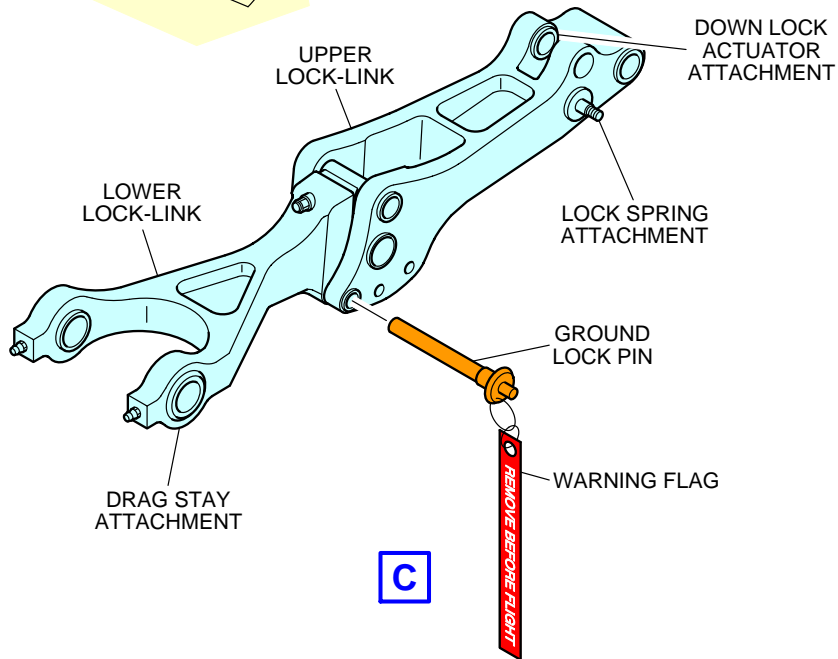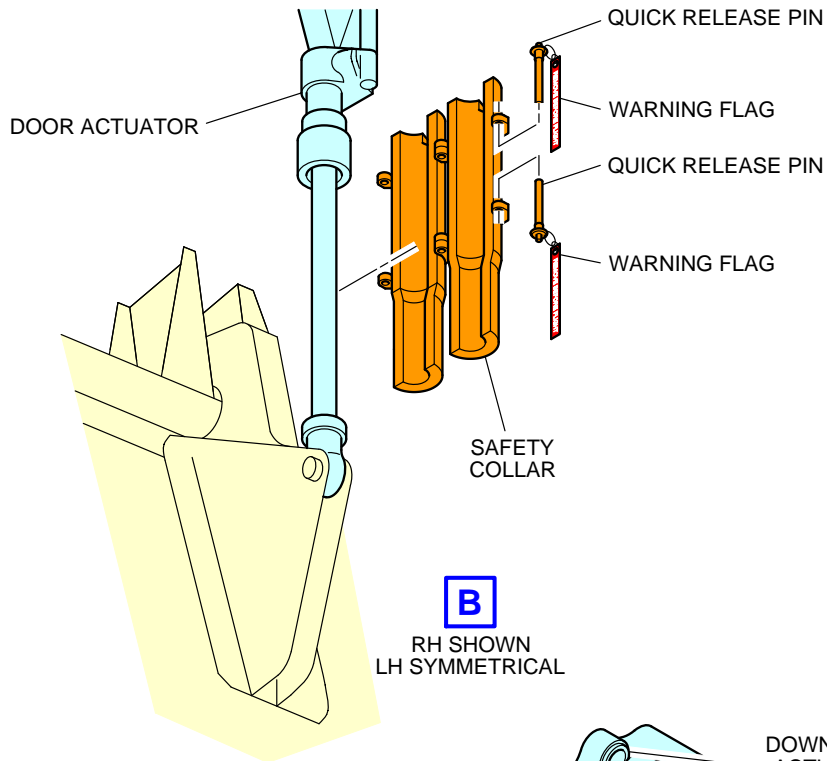


F_AC_020900_1_0230102_01_00

Nose Landing Gear
Mechanical Locking of NLG (Sheet 2 of 4)
FIGURE-2-9-0-991-023-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING


****ON A/C A330-700L**

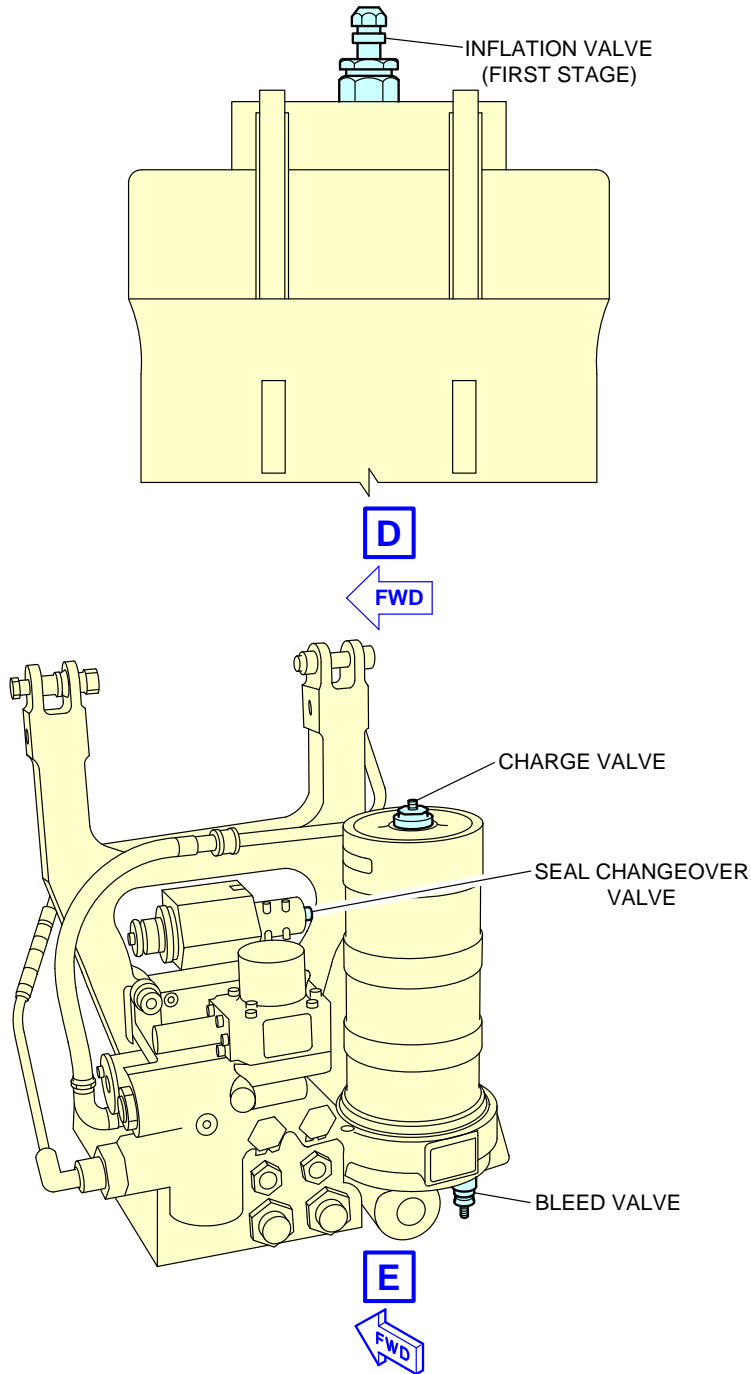

F_AC_020900_1_0230103_01_00

Nose Landing Gear
NLG Servicing 1 (Sheet 3 of 4)
FIGURE-2-9-0-991-023-A01

****ON A/C A330-700L**

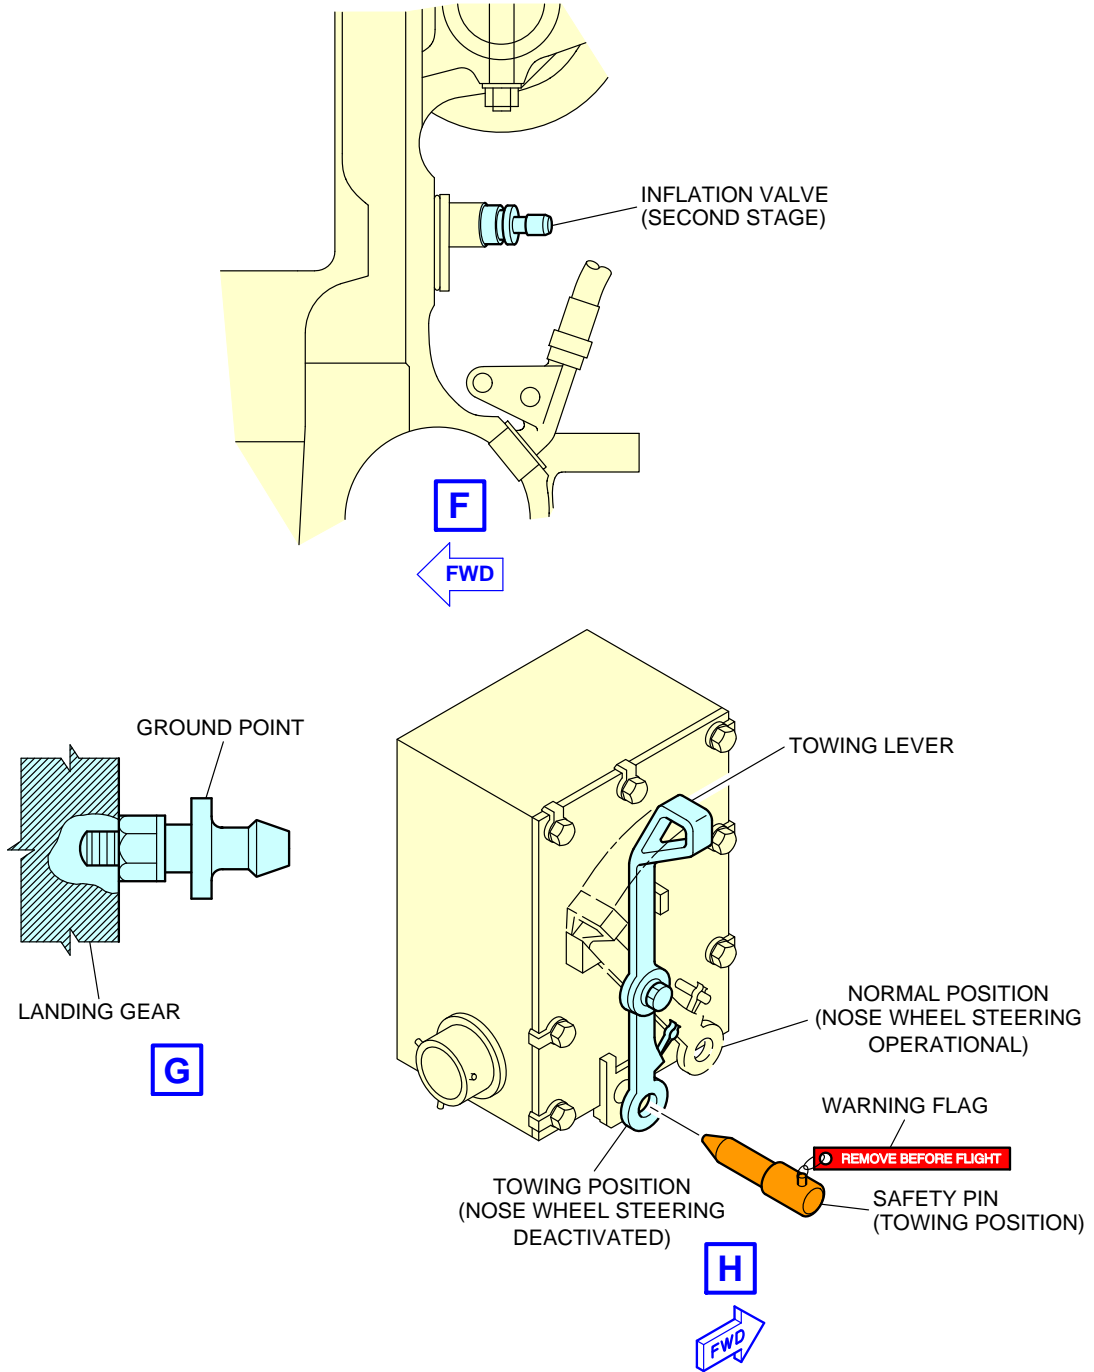


F_AC_020900_1_0230104_01_00

Nose Landing Gear
NLG Servicing 2 (Sheet 4 of 4)
FIGURE-2-9-0-991-023-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

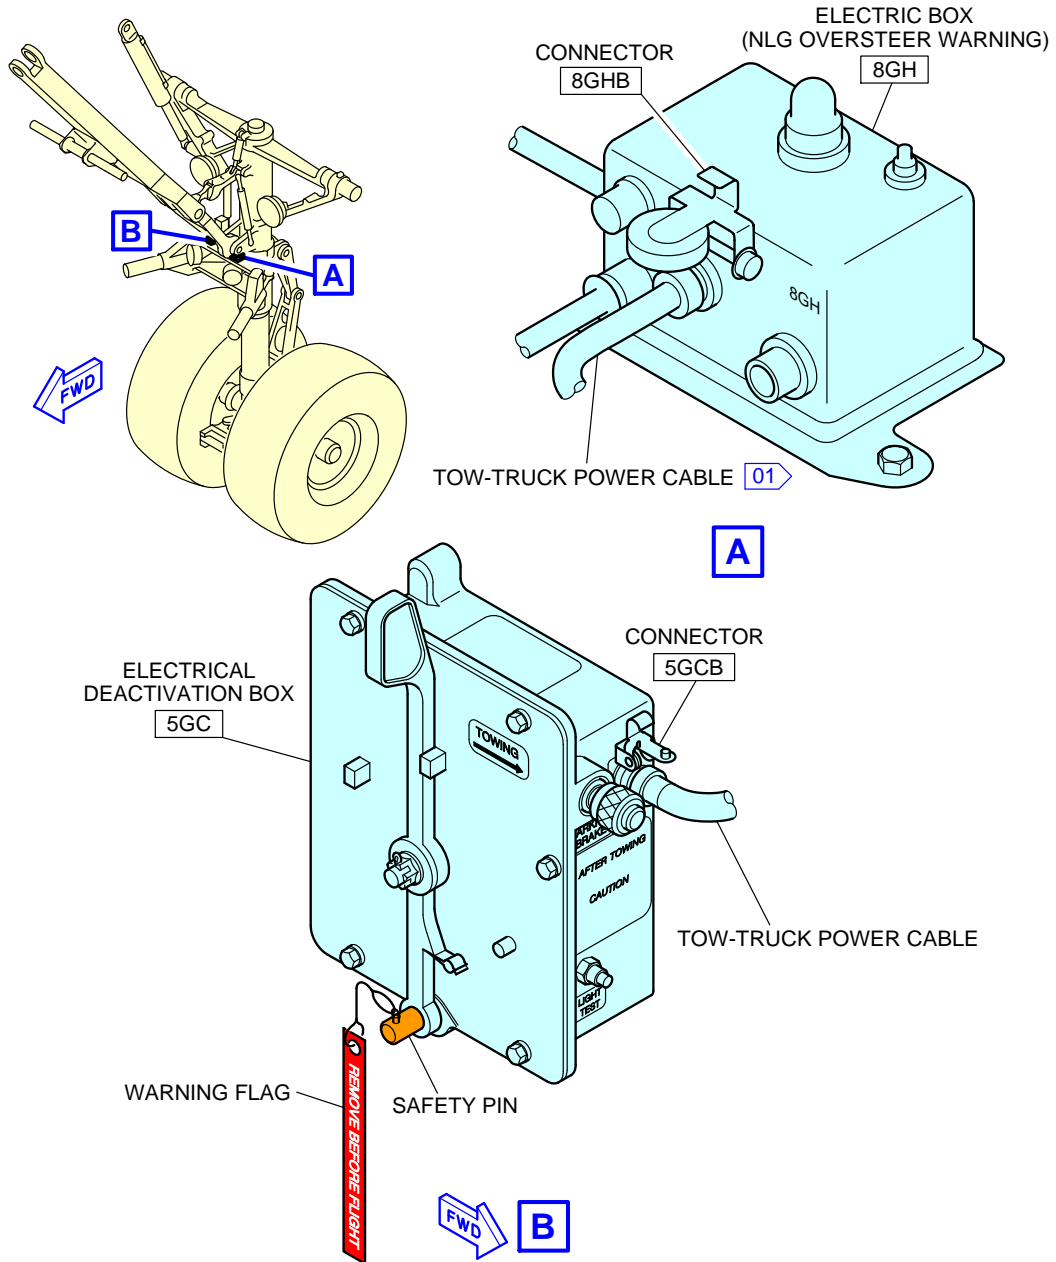

NOTE:

01 CONNECT THE TOW-TRUCK POWER CABLE TO CONNECTOR 8GHB IF ELECTRICAL BOX 8GH IS INSTALLED ON THE AIRCRAFT.

F_AC_020900_1_0240101_01_00

Tow Truck Power
NLG Servicing 3
FIGURE-2-9-0-991-024-A01

2-10-0 Exterior Lighting****ON A/C A330-700L**Exterior Lighting

1. General


This section gives the location of the aircraft exterior lighting.

EXTERIOR LIGHTING	
ITEM	DESCRIPTION
1	RIGHT NAVIGATION LIGHT (GREEN)
2	LEFT NAVIGATION LIGHT (RED)
3	TAIL NAVIGATION LIGHT (WHITE)
4	UPPER ANTI-COLLISION LIGHT/BEACON (RED)
5	LOWER ANTI-COLLISION LIGHT/BEACON (RED)
6	WING SCAN LIGHTS
7	WING STROBE LIGHT (HIGH INTENSITY, WHITE)
8	TAIL STROBE LIGHT (HIGH INTENSITY, WHITE)
9	LANDING LIGHTS
10	RUNWAY TURN-OFF LIGHTS
11	TAXI LIGHTS
12	TAKE-OFF LIGHTS
13	CARGO-COMPARTMENT FLOOD LIGHTS

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

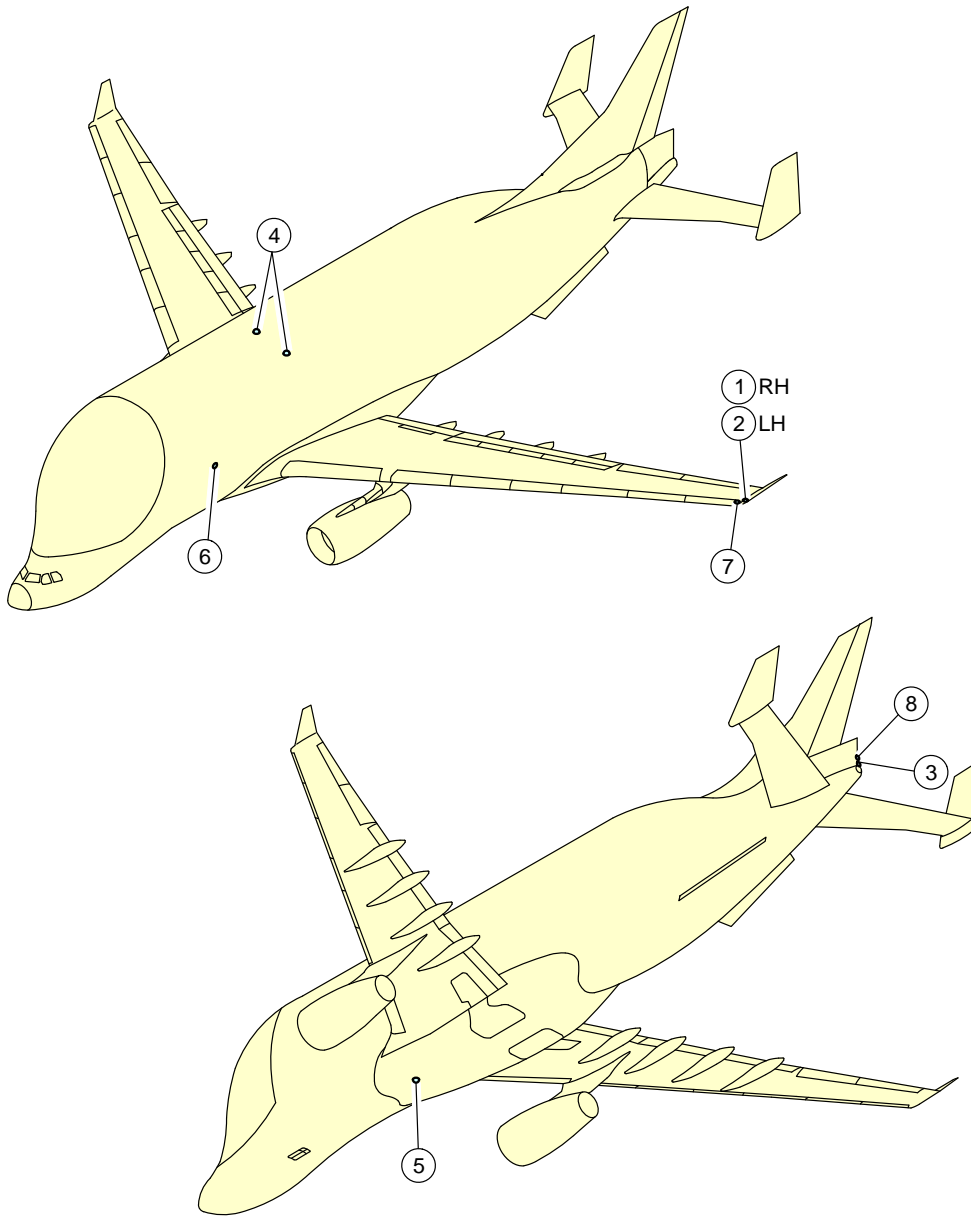


F_AC_021000_1_0100101_01_00

Exterior Lighting
Lights General Layout (Sheet 1 of 5)
FIGURE-2-10-0-991-010-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

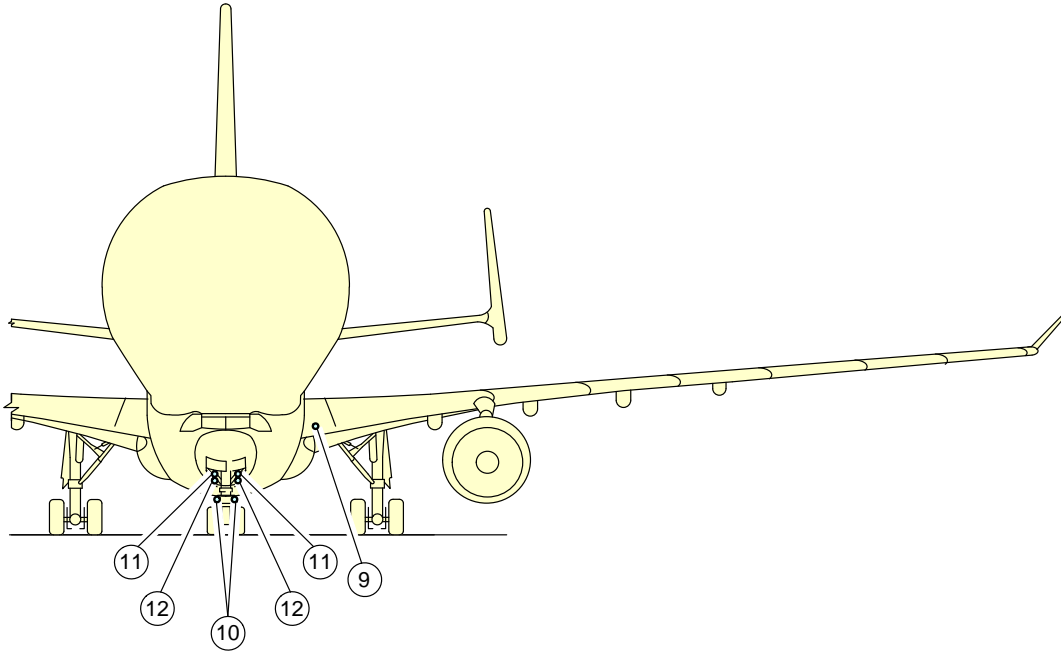

F_AC_021000_1_0100102_01_00


Exterior Lighting
Lights General Layout (Sheet 2 of 5)
FIGURE-2-10-0-991-010-A01

2-10-0

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

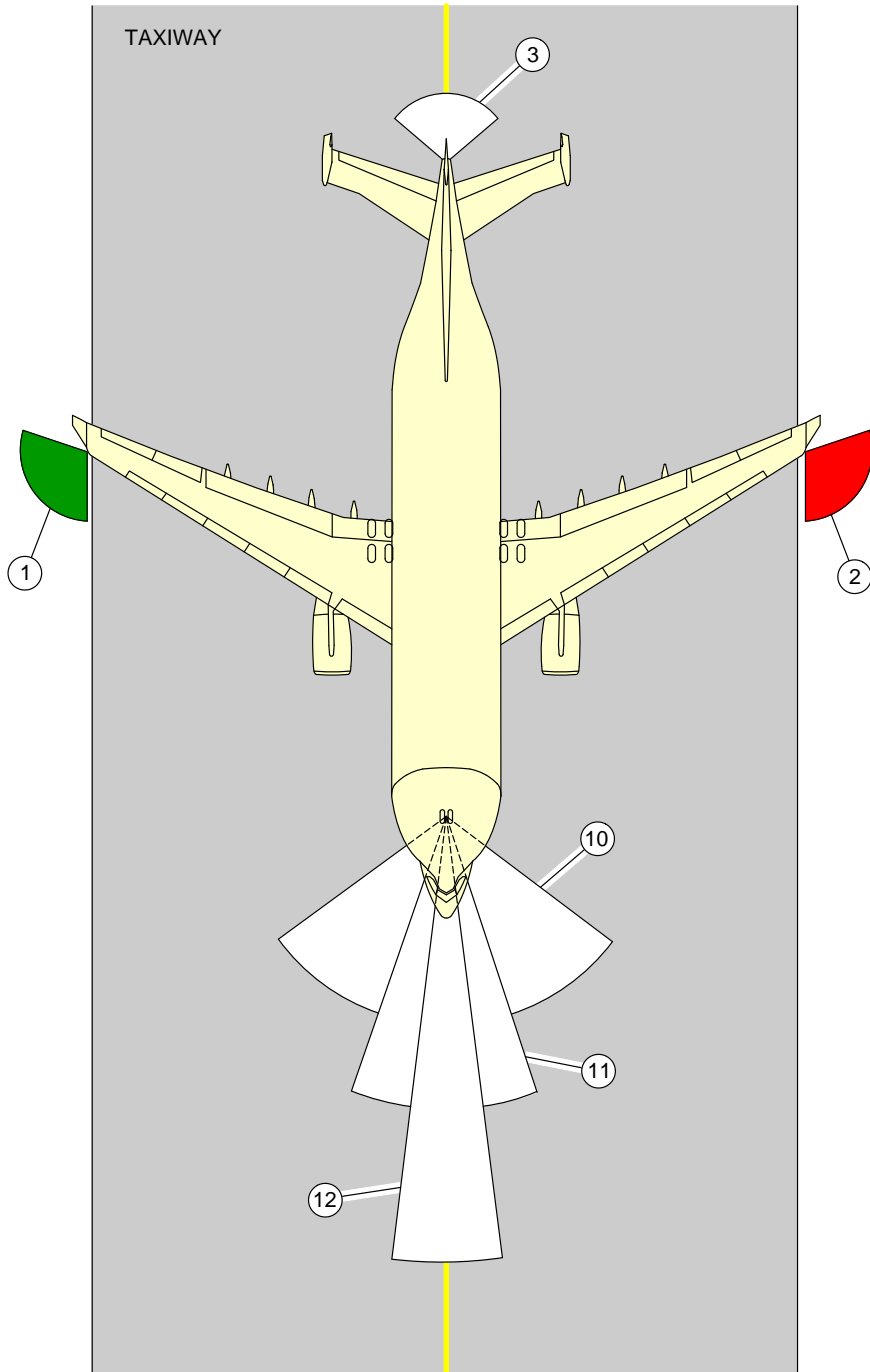

F_AC_021000_1_0100103_01_00


Exterior Lighting
(Sheet 3 of 5)
FIGURE-2-10-0-991-010-A01

2-10-0

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

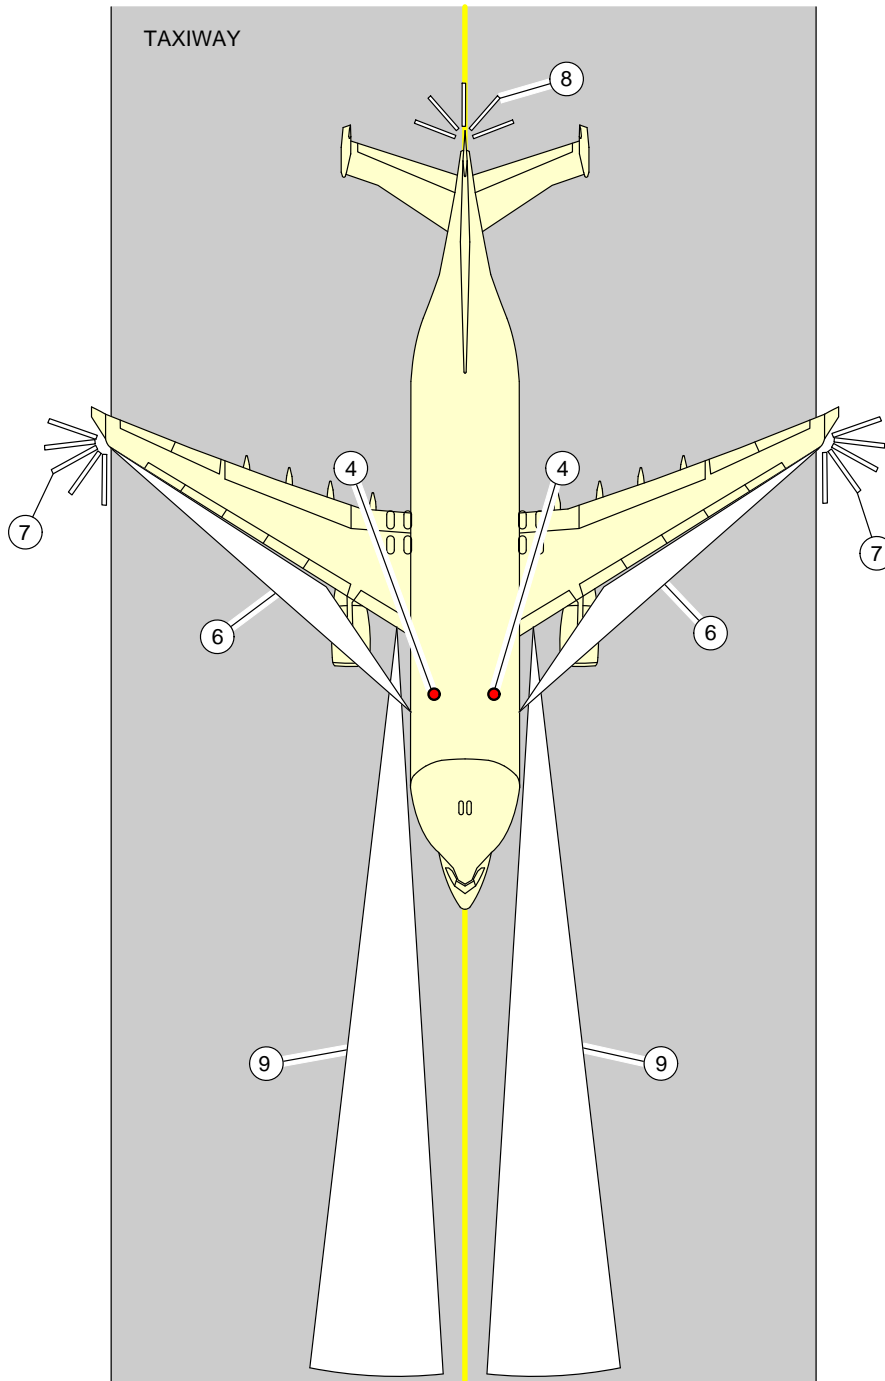



F_AC_021000_1_0100104_01_00

Exterior Lighting
(Sheet 4 of 5)
FIGURE-2-10-0-991-010-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

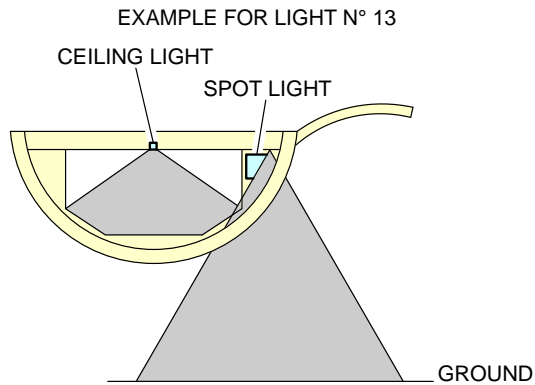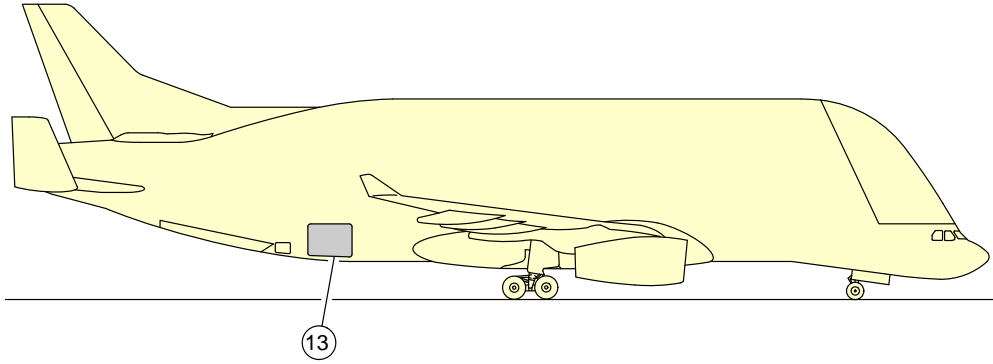

F_AC_021000_1_0100105_01_00

Exterior Lighting
Aft Lower-Cargo light (Sheet 5 of 5)
FIGURE-2-10-0-991-010-A01

2-10-0


2-11-0 Antennas and Probes Location****ON A/C A330-700L**Antennas and Probes Location

1. This section gives the location of antennas and probes.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

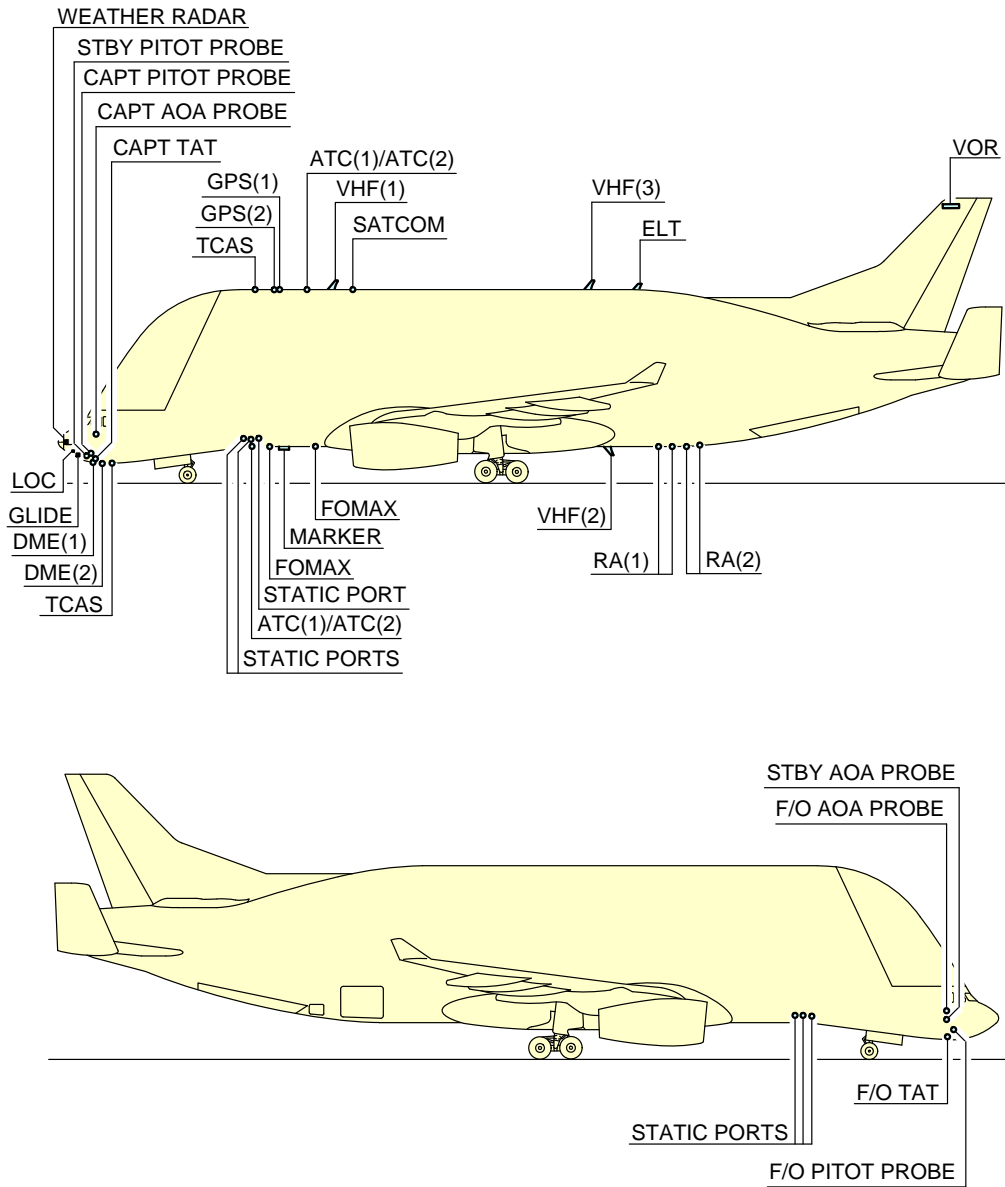

F_AC_021100_1_0080101_01_01

Antennas and Probes
Location
FIGURE-2-11-0-991-008-A01

2-12-0 Engine and Nacelle

**ON A/C A330-700L

Engine and Nacelle

1. Engine and Nacelle - RR TRENT 700 Engine

A. Engine

The RB211-TRENT 700 engine is a high bypass ratio, triple spool turbofan.

The principal modules of the engine are:

- The Low Pressure Compressor (LPC) rotor
- The Intermediate Pressure (IP) compressor
- The intermediate case
- The HP system (this includes the High Pressure Compressor (HPC), the combustion system and the High Pressure Turbine (HPT))
- The Intermediate Pressure Turbine (IPT)
- The external gearbox
- The LPC case
- The Low Pressure Turbine (LPT).

The compressor system has three axial flow compressors in a triple spool configuration. The compressors are turned independently by their related turbines, each at its most satisfactory speed.

The LP system has a single-stage compressor installed at the front of the engine. A shaft connects the compressor to a four-stage turbine at the rear of the gas generator. The gas generator also includes an eight-stage IP compressor, a six-stage HPC and a combustion system.

Each of the compressors in the gas generator is connected to, and turned by, a different single stage turbine. Between the HPC and the HPT is the annular combustion system which burns a mixture of fuel and air to supply energy as heat. Behind the LPT there is a common nozzle assembly which mixes the cold air and hot gas exhaust flows. The external gearbox module is installed below the rear case of the fan case. It has a gear train that decreases and increases the speed to meet the specified drive requirements of each accessory.

B. Nacelle

The nacelle gives the engine an aerodynamic shape. Each engine is housed in a nacelle suspended from a pylon attached below the wing. The nacelle consists of the following major components:

(1) Air Intake Cowl

The air intake cowl is attached to the forward flange of the front LPC case. Its function is to supply inlet air in a satisfactory condition for the engine compressors.

(2) Fan Cowl Doors

The fan cowl doors hang on the aircraft wing pylon and are closed around the LPC cases. They can be opened during ground maintenance to give access to the components installed on the cases and to let the thrust reverser cowl doors be opened.

(3) Thrust Reverser

The thrust reverser is a component of the aircraft engine nacelle. The thrust reverser is a twin thrust reverser cowl door ('C' duct) construction providing a fan duct inner wall fairing for the core engine between the top and bottom bifurcation walls. The thrust reverser incorporates hydraulically-powered actuators to operate four pivoting doors which redirect the fan air flow in reverse thrust. Hydraulic power is provided from the aircraft hydraulic system to position the doors in a "stowed" position for forward thrust and "deployed" position for reverse thrust.


(4) Common Nozzle Assembly (CNA)

The CNA is attached to the aft flange of the exhaust case. The function of the CNA is to mix the core engine exhaust with the LPC outlet air.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

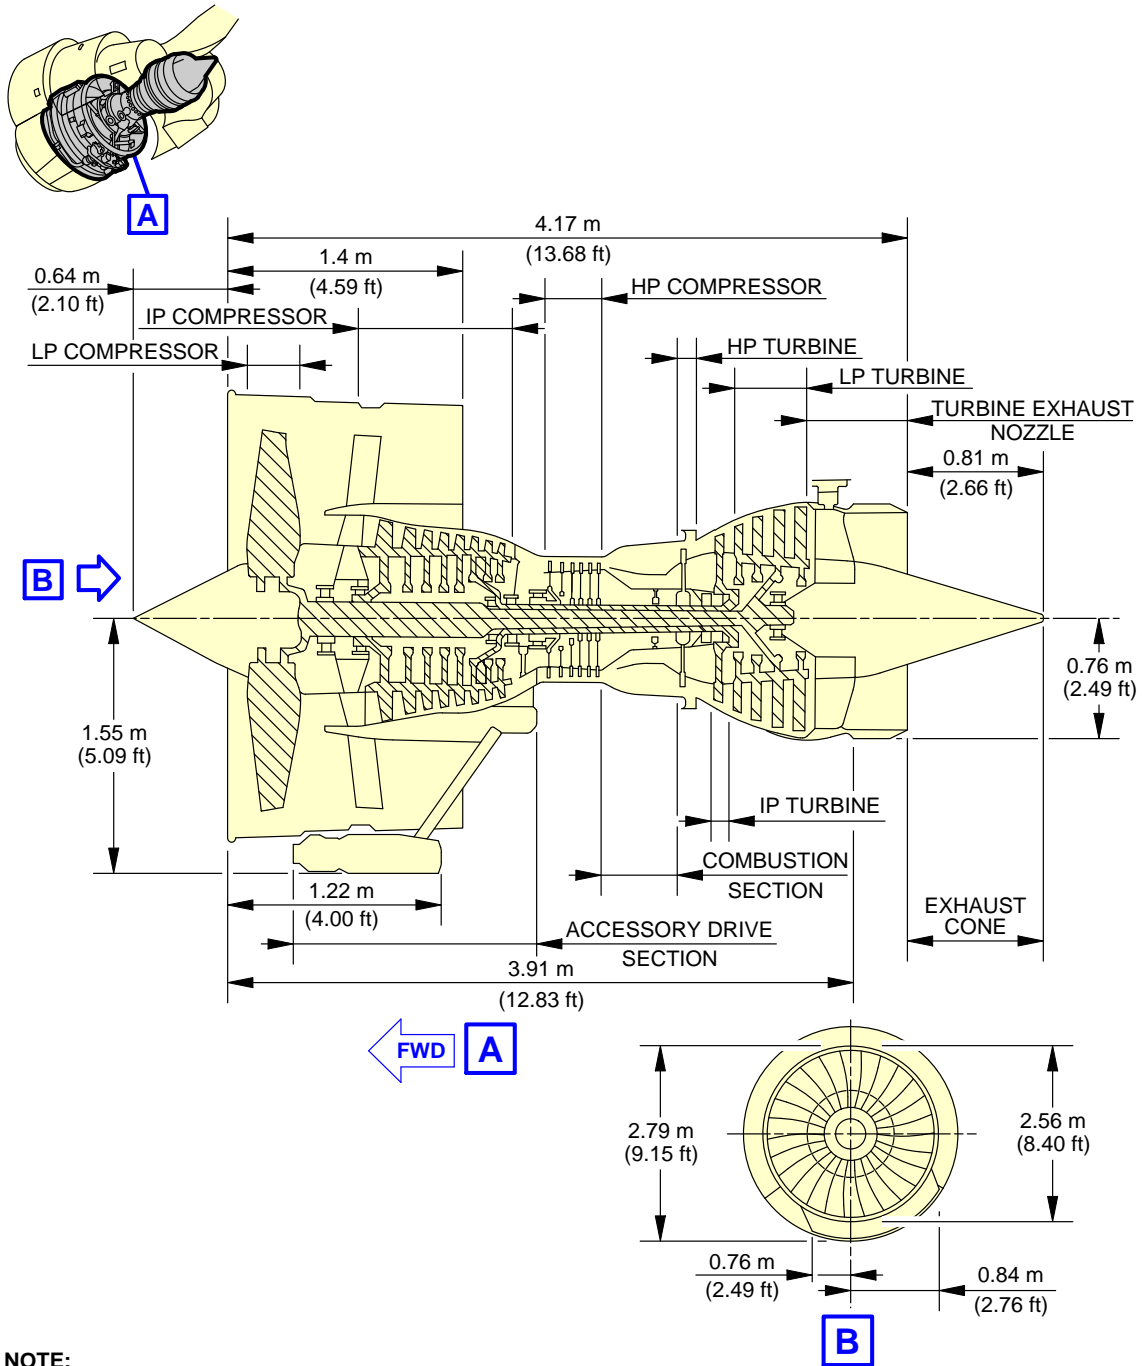

NOTE:
APPROXIMATE DIMENSIONS.



F_AC_021200_1_0300101_01_00

Engine and Nacelle
Engine Dimensions - RR TRENT 700
FIGURE-2-12-0-991-030-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

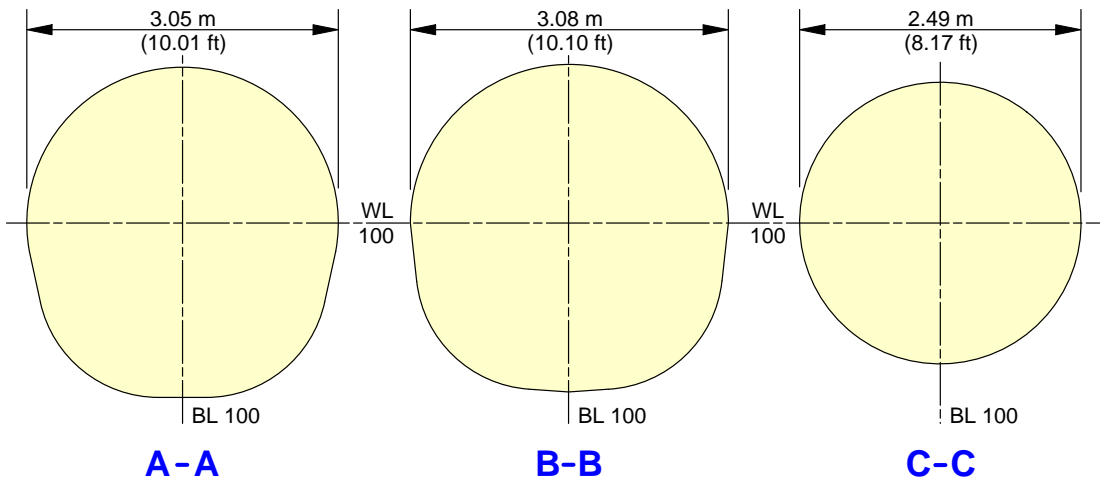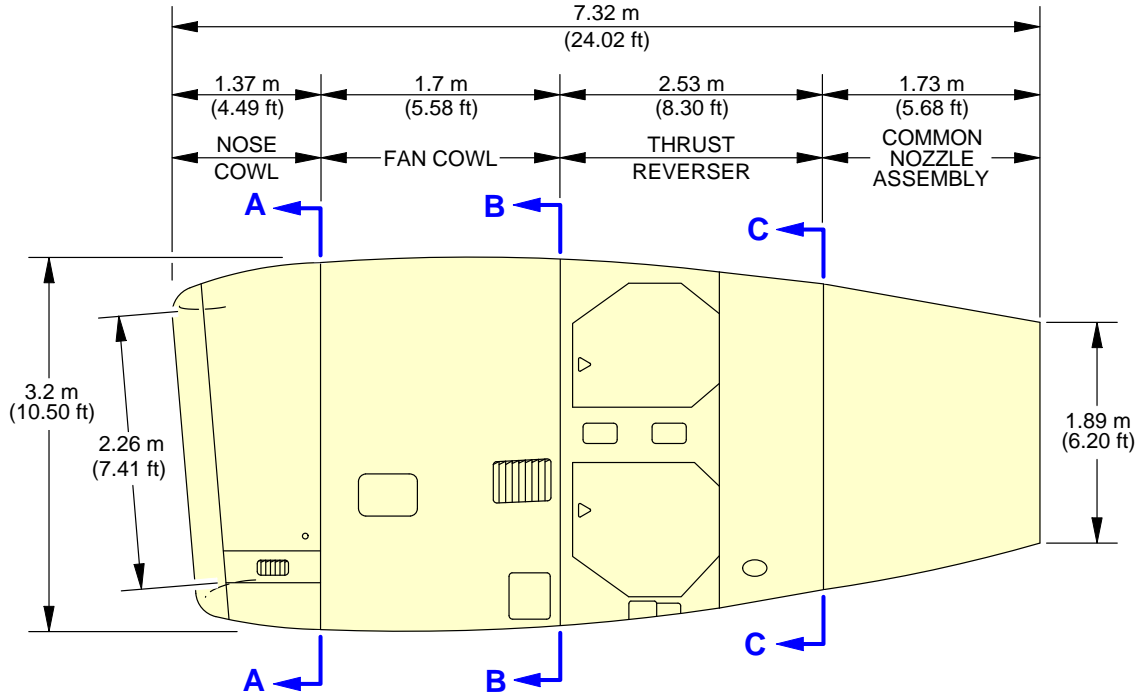

NOTE:
APPROXIMATE DIMENSIONS.


F_AC_021200_1_0310101_01_00

Engine and Nacelle
Nacelle Dimensions - RR TRENT 700
FIGURE-2-12-0-991-031-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

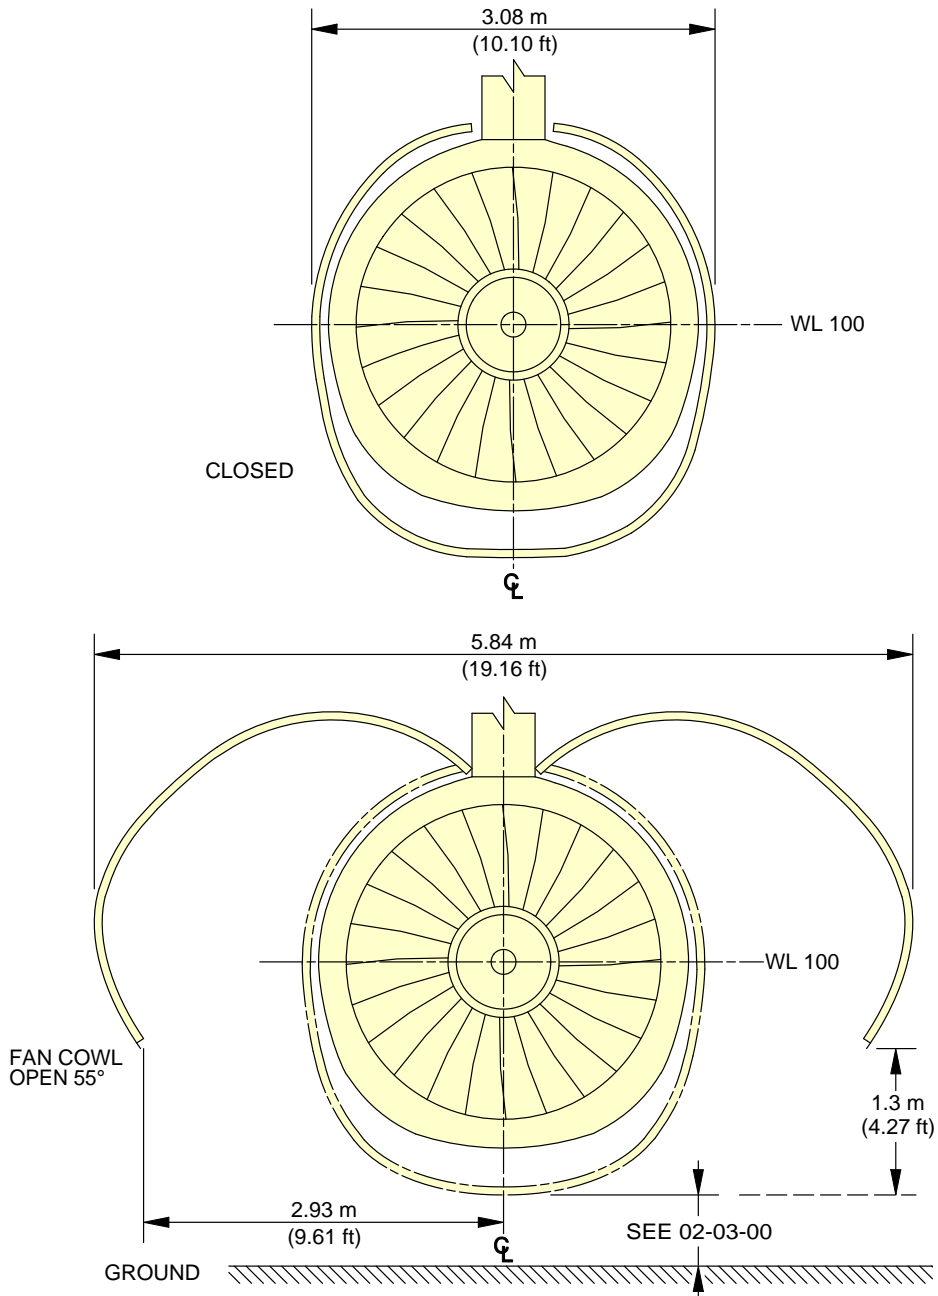


NOTE:
APPROXIMATE DIMENSIONS.

F_AC_021200_1_0320101_01_00

Engine and Nacelle
Fan Cowls - RR TRENT 700
FIGURE-2-12-0-991-032-A01

****ON A/C A330-700L**

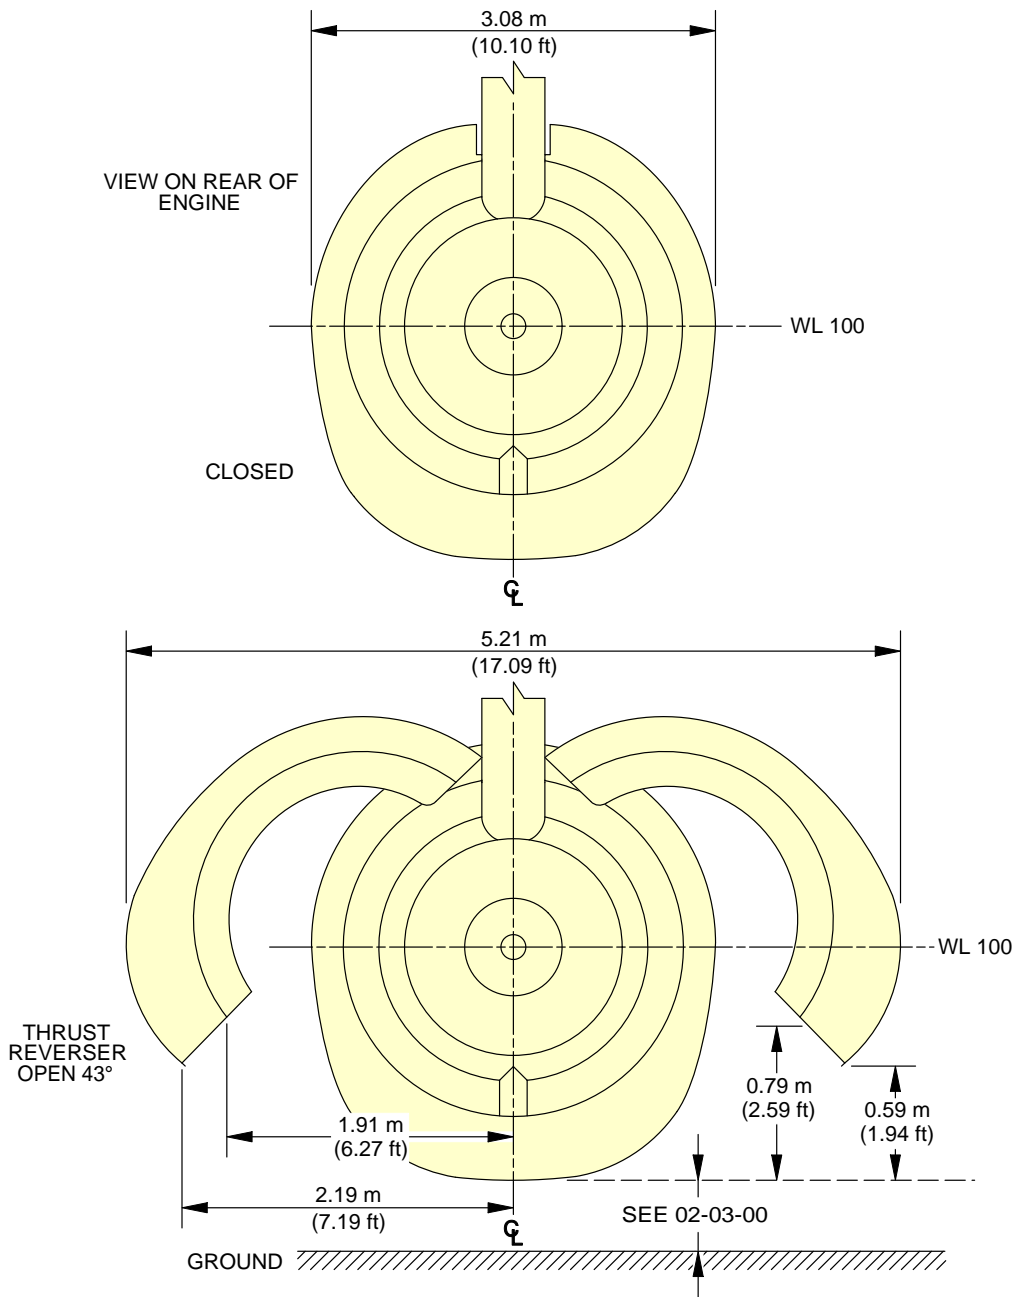

NOTE:
APPROXIMATE DIMENSIONS.

F_AC_021200_1_0330101_01_00

Engine and Nacelle
Thrust Reverser Cowls - RR TRENT 700
FIGURE-2-12-0-991-033-A01

2-12-1 Auxiliary Power Unit

**ON A/C A330-700L

Auxiliary Power Unit

1. General

The Auxiliary Power Unit (APU) and its related mechanical components are installed at the rear part of the fuselage in the tailcone section. The APU compartment is a fireproof area (identified as the Fire Zone).

The APU is a pneumatic and shaft-power gas-turbine engine and is used for the ground and in-flight power supply of the aircraft.

The APU supplies:

- Mechanical shaft-power to operate a generator
- Bleed-air to the Main Engine Start (MES) and the Environmental Control System (ECS).

A part of the automatic system, with the pneumatic and the electromechanical controls, operates the start and the acceleration functions of the APU.

An air intake system with a flap-type door is installed in front of the APU compartment. The exhaust gases pass overboard at the end of the fuselage cone.

2. Powerplant

The APU is the Garrett Gas-Turbine Compressor Power-unit (GTCP) 331-350C with a single shaft engine.

The engine is the primary component of the APU, which is of the modular design. The modules of the engine are:

- The power section
- The load compressor
- The accessory drive gearbox with LRU(s).

The power section has a two-stage centrifugal compressor, a reverse-flow annular combustion chamber and a three-stage axial turbine. The power section directly operates the one-stage centrifugal load-compressor which supplies the bleed-air to the pneumatic system. The inlet guide vanes as part of the load compressor, control the airflow.

The power section also operates the gearbox which is attached to the load compressor. The following LRU's are mounted on the gearbox :

- The APU generator,
- The starter motor,
- The oil pump,
- The Fuel Control Unit (FCU),
- The cooling air fan.

The APU has a gearbox-driven oil-cooled AC generator.

The cooling air and ventilation system of the APU supplies the air for cooling of the APU and the equipment on the APU. It also supplies the air for ventilation of the APU compartment.

3. Control Circuit

The Electronic Control Box (ECB), which controls the FCU and the Inlet Guide Vanes (IGV), keeps the APU at a constant speed. The control circuit is used to start the APU, to shut it down, to control it and to prevent internal failure.


4. Controls and Indication

The primary APU controls and indications are installed in the overhead panel, on the center pedestal panel and on the forward center panel. External APU panels are also installed on the nose landing gear and on the refuel/defuel panel, to initiate an APU emergency shut-down.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

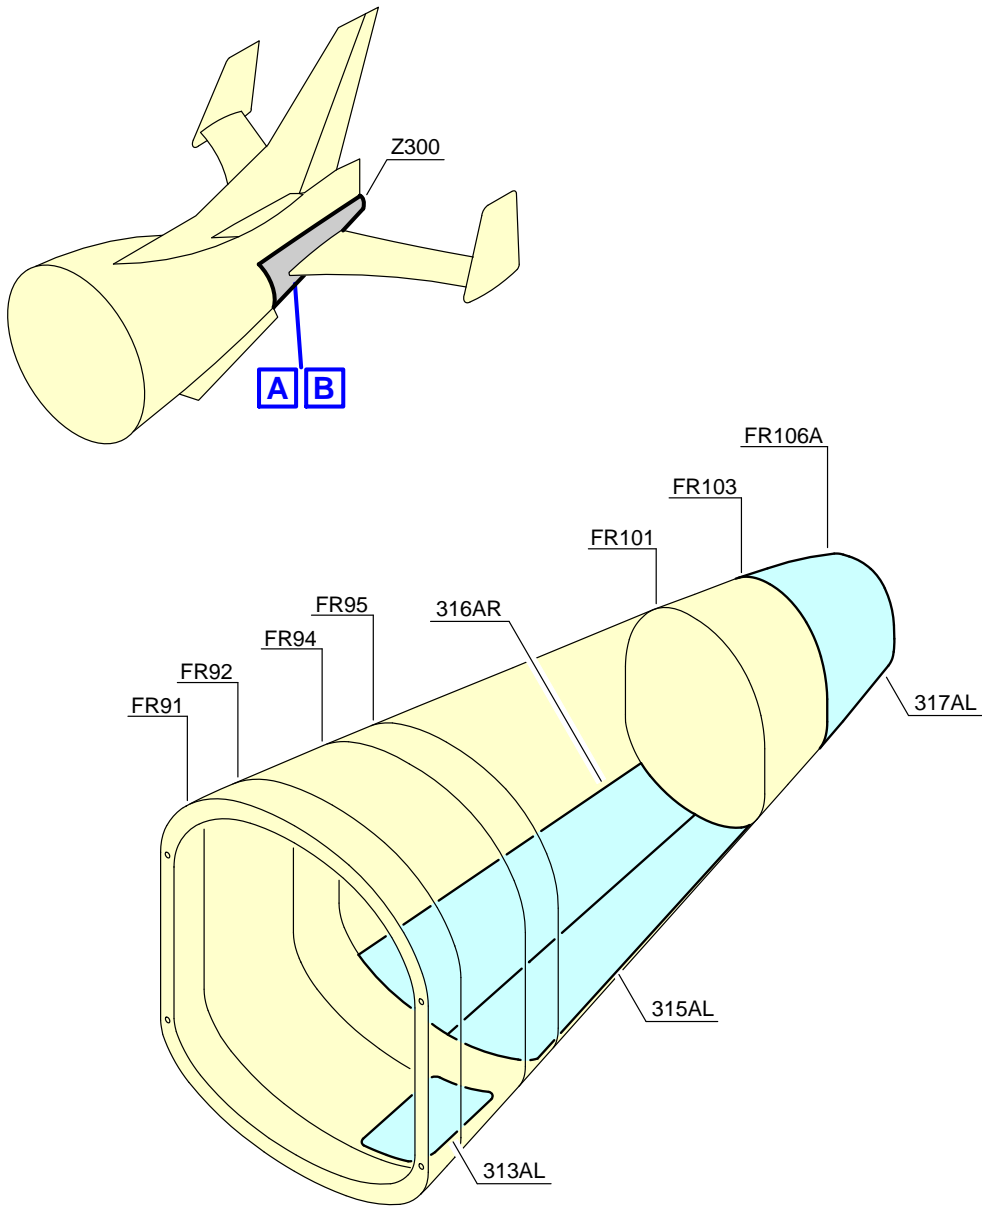

A


F_AC_021201_1_0040101_01_00

Auxiliary Power Unit
Access Doors (Sheet 1 of 2)
FIGURE-2-12-1-991-004-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

**ON A/C A330-700L

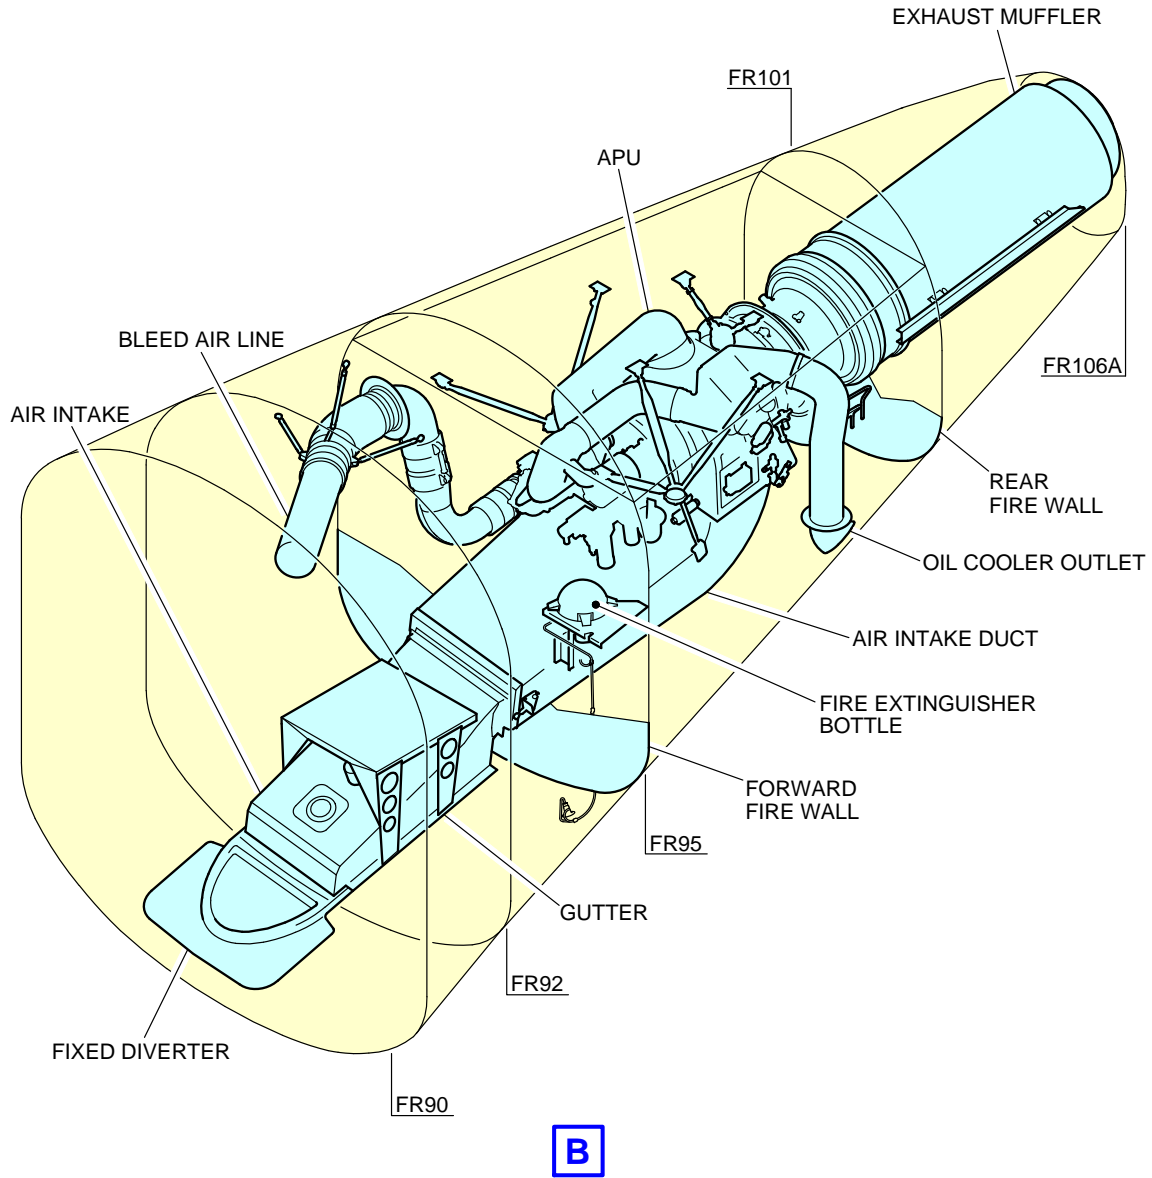

F_AC_021201_1_0040103_01_00

Auxiliary Power Unit
General Layout (Sheet 2 of 2)
FIGURE-2-12-1-991-004-A01

2-13-0 Levelling, symmetry and Alignment****ON A/C A330-700L**Leveling and Symmetry

1. Quick Leveling

The quick leveling procedures are documented in AMM.


2. Precision Leveling

For precise leveling, it is necessary to install sighting rods in the receptacles located under the fuselage (points 12 and 13 for longitudinal leveling) and under the wings (points 2LH and 2RH for lateral leveling) and use a sighting tube. With the aircraft on jacks, adjust the jacks until the reference marks on the sighting rods are aligned in the sighting plane (aircraft level).

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

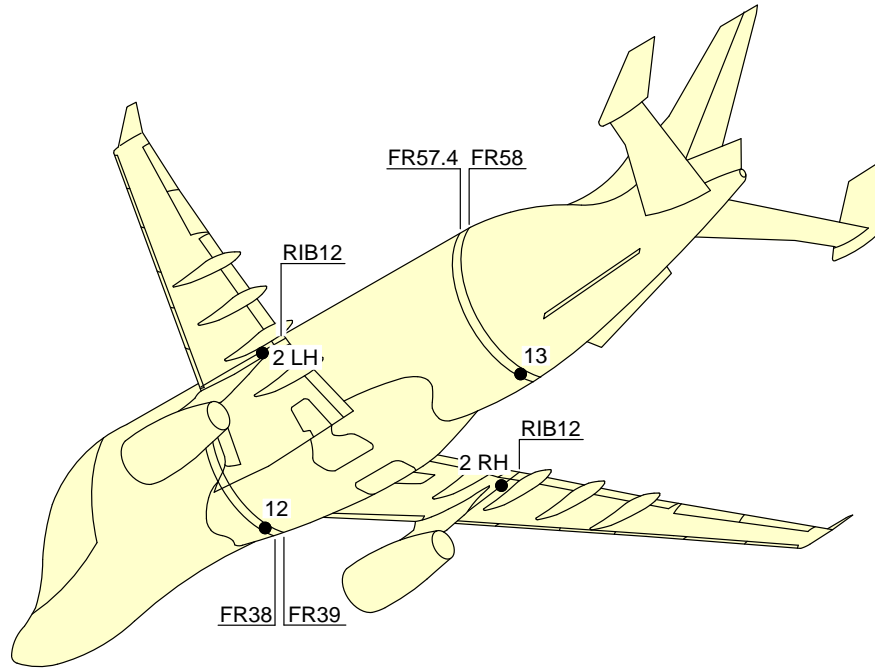

F_AC_021300_1_0080101_01_00

Location of Leveling Points
FIGURE-2-13-0-991-008-A01

2-14-0 Jacking for Maintenance****ON A/C A330-700L**Jacking for Maintenance

1. Aircraft Jacking Points for Maintenance

A. General

(1) The A330-700L can be jacked:

- At not more than 152 000 kg (335 103 lb),
- Within the limits of the permissible wind speed when the aircraft is jacked outside a closed environment.

B. Primary Jacking Points

(1) The aircraft is provided with three primary jacking points:

- One located under the forward fuselage (after FR11),
- Two located under the wings (one under each wing), at the intersection of RIB10 and the rear of the spar-datum.

(2) Three jack adapters (ground equipment) are used as intermediary parts between the aircraft jacking points and the jacks:

- One female spherical jack adapter at the forward fuselage,
- Two female spherical jack pad adapters at the wings (one at each wing).

C. Auxiliary Jacking Point (Safety Stay)

(1) When the aircraft is on jacks, a safety stay is placed under the fuselage at FR87 to prevent tail tipping caused by accidental displacement of the aircraft center of gravity.

(2) The safety point must not be used for lifting the aircraft.

(3) One male spherical stay adapter (ground equipment) is used as an intermediary part between the aircraft safety point and the stay.

2. Jacks and Safety Stay

A. Jack Design

(1) The maximum eligible loads given in the table are the maximum loads applicable on jack fittings.

(2) In fully retracted position (jack stroke at minimum), the height of the jack is such that the jack may be placed beneath the aircraft under the most adverse conditions, namely, tires deflated and shock absorbers depressurized, with sufficient clearance between the aircraft jacking point and the jack upper end.

- (3) The lifting jack stroke enables the aircraft to be jacked up so that the Fuselage Datum Line (FDL) may be positioned up to 7.2 m (23.62 ft) from the ground to allow all required maintenance procedures and in particular, the removal/installation of the landing-gear shock absorbers.


B. Safety Stay

- (1) The stay stroke enables the aircraft tail to be supported up to the FDL positioned 7.2 m (23.62 ft) from the ground.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

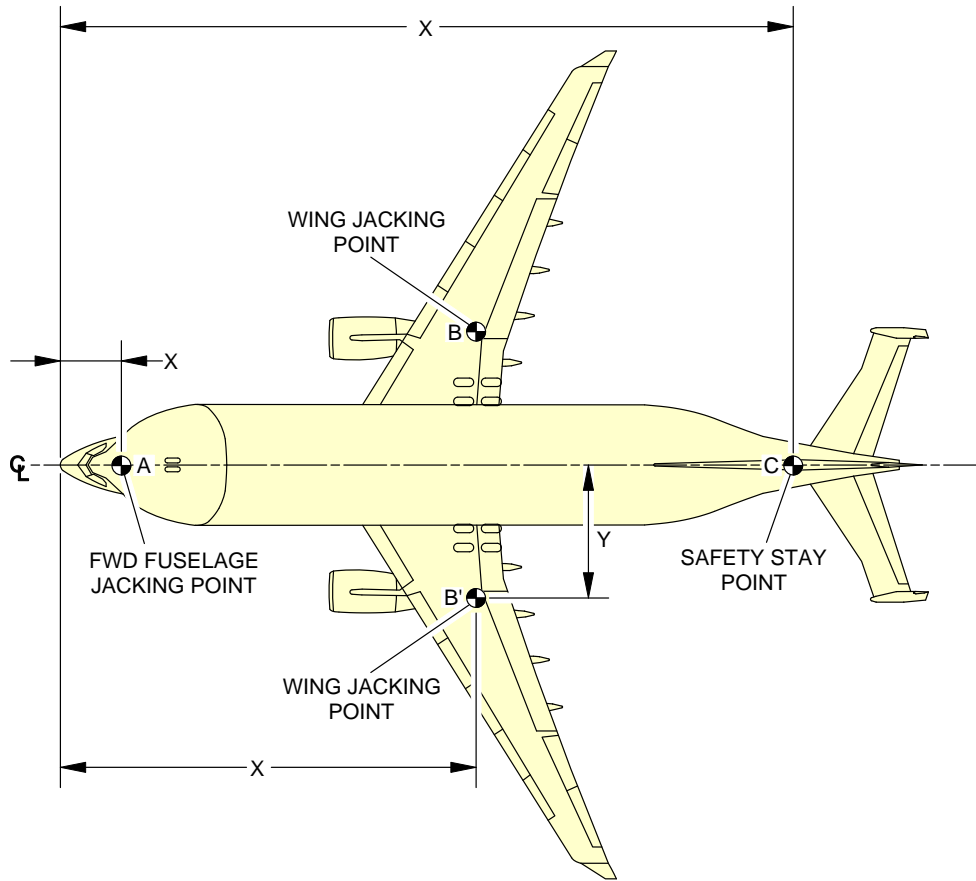

	X		Y		MAXIMUM JACKING FORCE daN	
	m	ft	m	ft		
FORWARD FUSELAGE JACKING POINT A	5.3	17.39	0	0	12 686.4	
WING JACKING POINT	B	29.85	97.93	8.51	27.92	71 923.3
	B'	29.85	97.93	-8.51	-27.92	71 923.3
SAFETY STAY C	55.17	181.00	0	0	4 500	

NOTE:
SAFETY STAY IS NOT USED FOR JACKING.


F_AC_021400_1_0230101_01_00

Jacking for Maintenance
Jacking Points Layout and Maximum Jacking Force
FIGURE-2-14-0-991-023-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

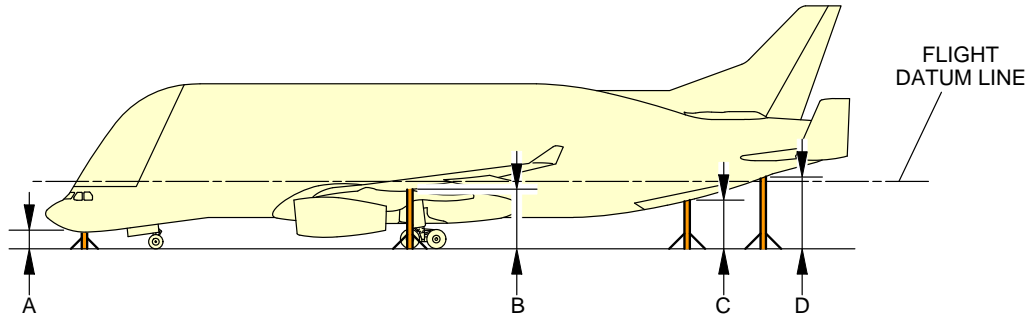

	HEIGHT IN m (ft)				
	A	B	C	D	
AIRCRAFT ON WHEELS WITH STANDARD TIRES 01 , MAX. JACK WEIGHT 152 000 kg (335 103 lb) (BALANCE 18% MEAN AERODYNAMIC CHORD)	1.43 (4.69)	4.62 (15.16)	3.82 (12.53)	5.27 (17.29)	
AIRCRAFT ON WHEELS WITH STANDARD TIRES 01 , MAX. JACK WEIGHT 152 000 kg (335 103 lb) (BALANCE 34% MEAN AERODYNAMIC CHORD)	1.56 (5.12)	4.60 (15.09)	3.68 (12.07)	5.09 (16.70)	
AIRCRAFT ON WHEELS WITH STANDARD TIRES 01 , OEW 127 000 kg (279 987 lb)	1.52 (4.99)	4.68 (15.35)	3.87 (12.70)	5.31 (17.42)	
AIRCRAFT ON WHEELS, NOSE LANDING GEAR SHOCK ABSORBER DEFLATED AND FLAT TIRES	1.0 (3.28)	4.68 (15.35)	4.29 (14.07)	5.83 (19.13)	
AIRCRAFT ON WHEELS, BOTH MAIN LANDING GEAR SHOCK ABSORBERS DEFLATED AND FLAT TIRES	1.61 (5.28)	4.10 (13.45)	2.73 (8.96)	4.04 (13.25)	
AIRCRAFT ON WHEELS, NOSE LANDING GEAR AND LEFT MAIN LANDING GEAR SHOCK ABSORBERS DEFLATED AND FLAT TIRES	1.06 (3.48)	(LH) 3.96 (12.99)	(RH) 4.81 (15.78)	3.71 (12.17)	5.18 (16.99)
AIRCRAFT ON JACKS, FUSELAGE DATUM REFERENCE PARALLEL TO GROUND AT 6.51 m (21.36 ft), SHOCK-ABSORBER RELAXED, CLEARANCE OF MAIN LANDING GEAR WHEELS: 0.24 m (0.79 ft) (STANDARD TIRES 01), CLEARANCE OF NOSE LANDING GEAR WHEELS: 0.96 m (3.15 ft) (STANDARD TIRES 01)	2.66 (8.73)	5.81 (19.06)	4.98 (16.34)	6.42 (21.06)	

NOTE:

01 STANDARD TIRES: NOSE LANDING GEAR = 1 050 x 395 R16
MAIN LANDING GEAR = 1 400 x 530 R23




F_AC_021400_1_0240101_01_01

Jacking for Maintenance
Ground Clearance on Jacks
FIGURE-2-14-0-991-024-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

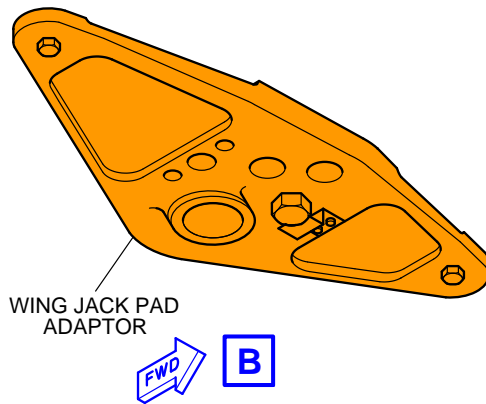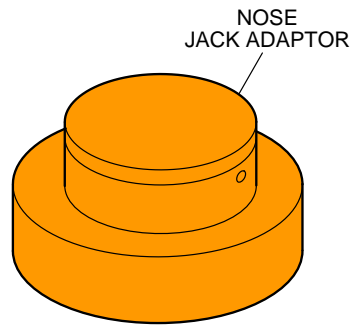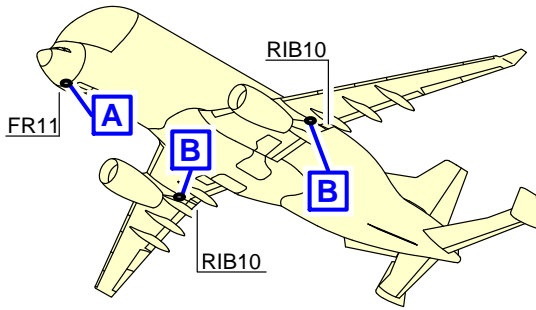

F_AC_021400_1_0250101_01_00

Jacking for Maintenance
Jacking Point Adaptors
FIGURE-2-14-0-991-025-A01


2-14-1 Jacking of the Landing Gear****ON A/C A330-700L**Jacking of the Landing Gear

1. Not applicable.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING


****ON A/C A330-700L**

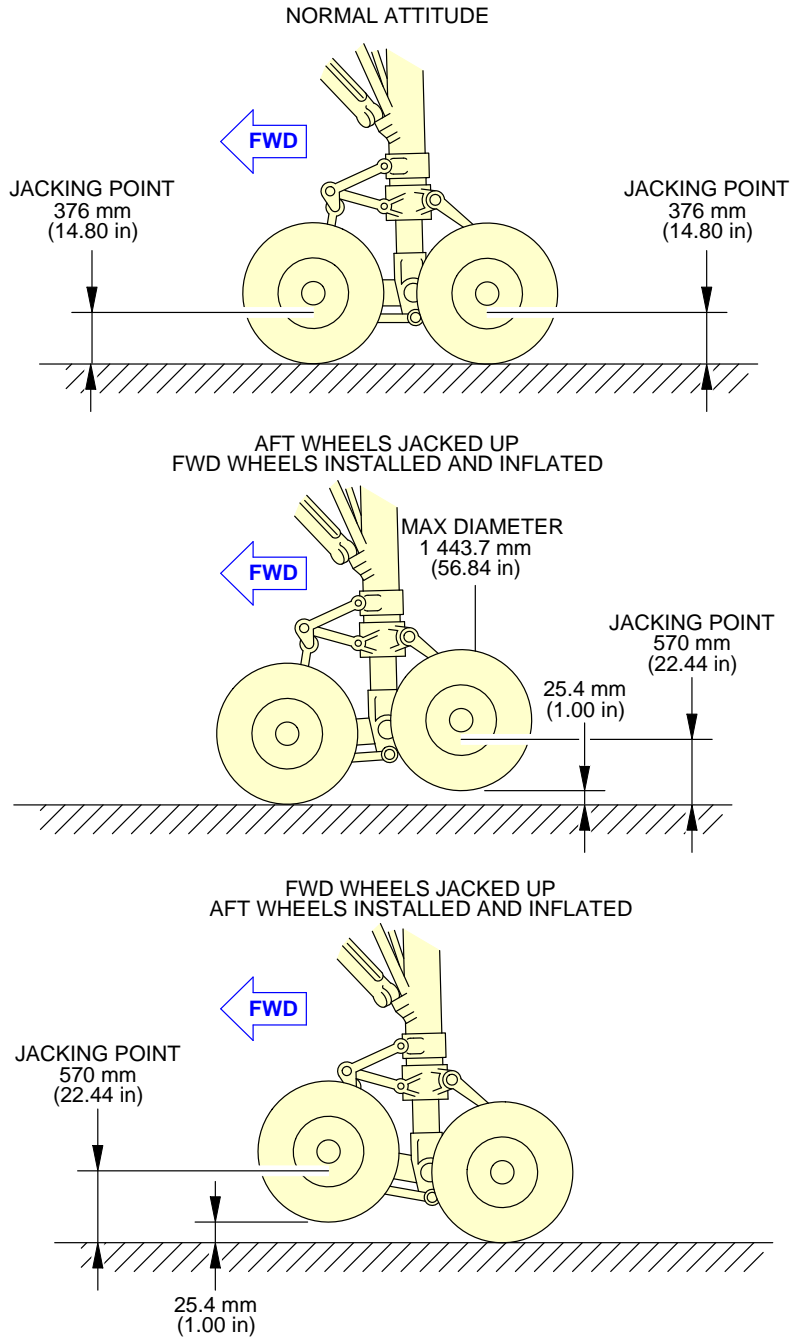

F_AC_021401_1_0270101_01_00

Jacking of the Landing Gear
Jacking of the Landing Gear (Sheet 1 of 3)
FIGURE-2-14-1-991-027-A01

****ON A/C A330-700L**

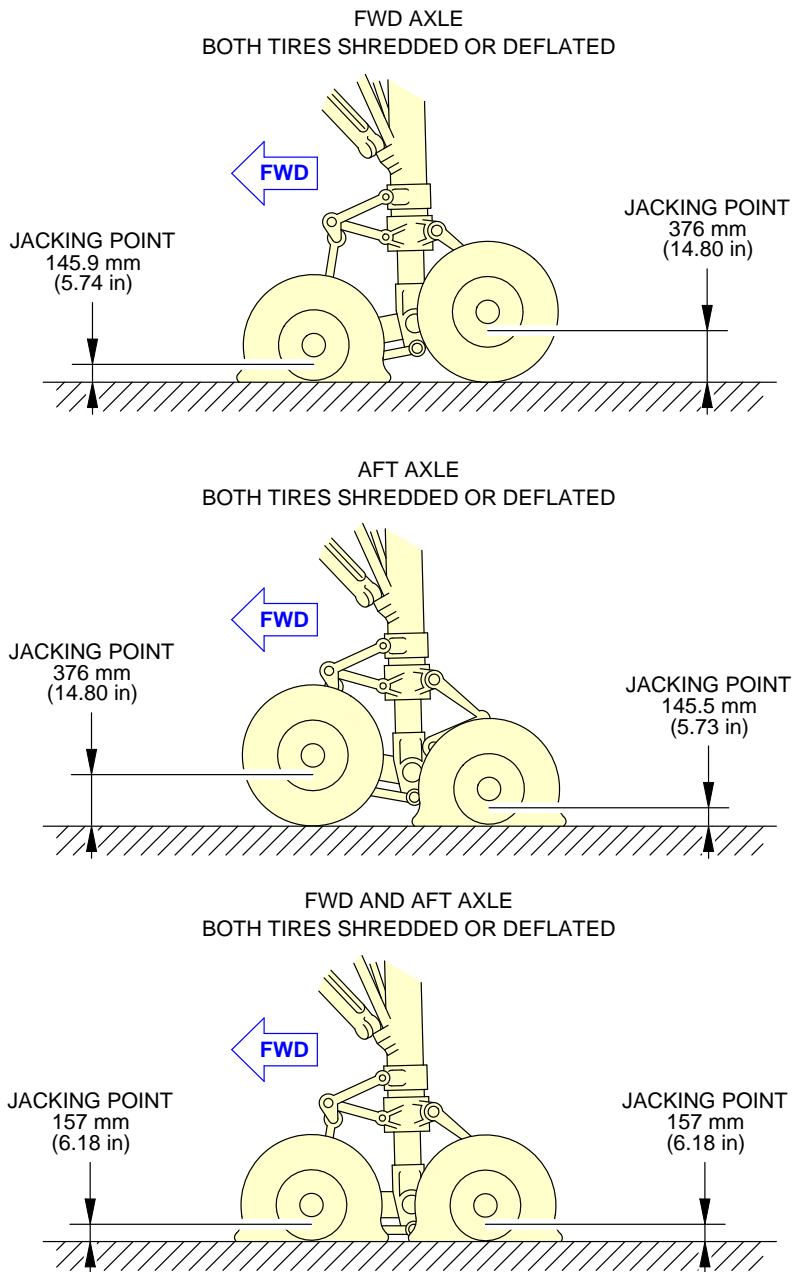


F_AC_021401_1_0270102_01_00

Jacking of the Landing Gear
Jacking of the Landing Gear (Sheet 2 of 3)
FIGURE-2-14-1-991-027-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

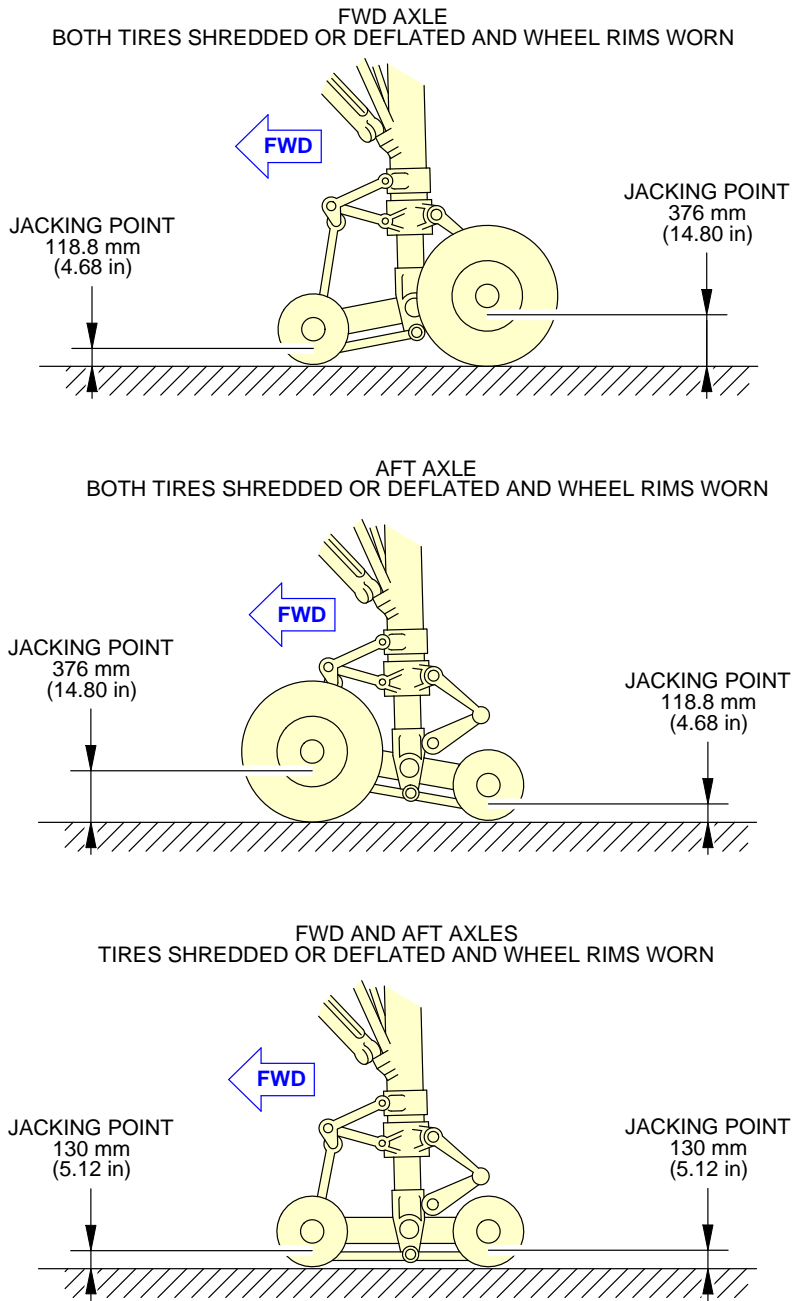



F_AC_021401_1_0270103_01_00

Jacking of the Landing Gear
Jacking of the Landing Gear (Sheet 3 of 3)
FIGURE-2-14-1-991-027-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

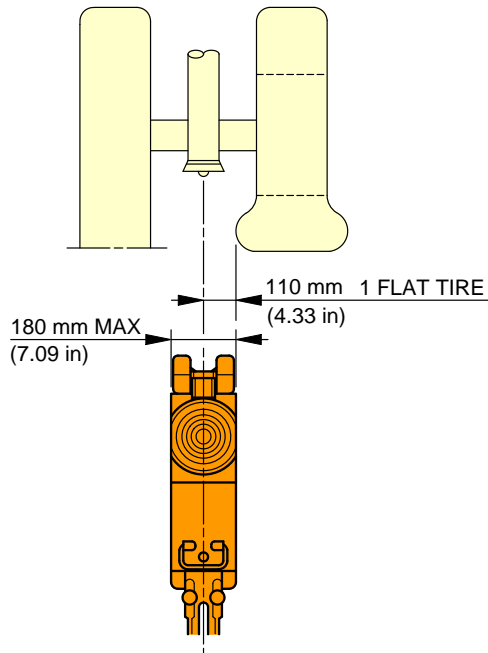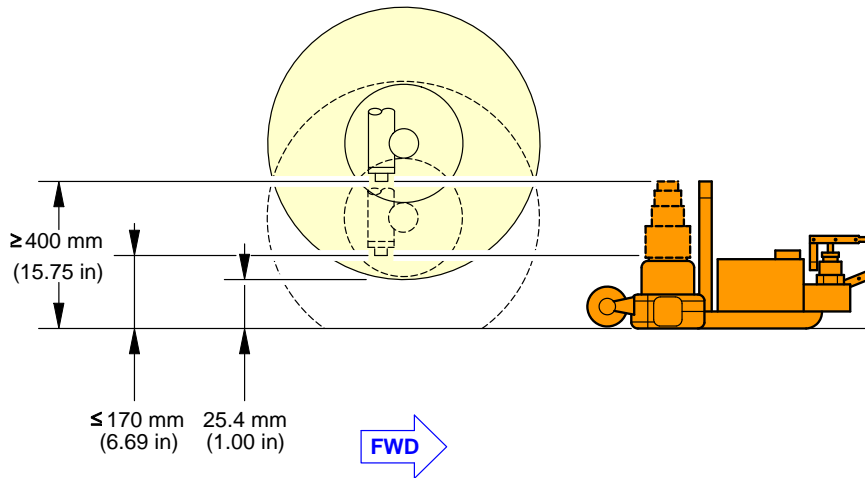

F_AC_021401_1_0280101_01_00


Jacking of the Landing Gear
(Sheet 1 of 2)
FIGURE-2-14-1-991-028-A01

A330-700L


AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**


NORMAL ATTITUDE

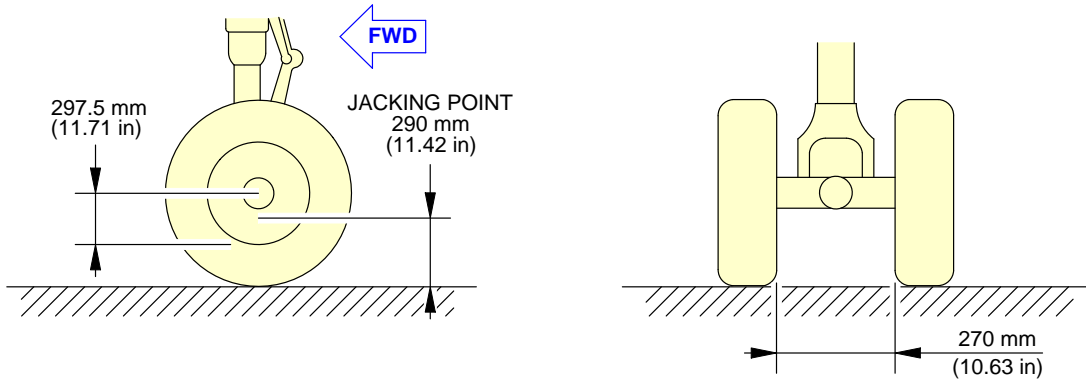

TWO TIRES DEFLATED OR SHREDDED

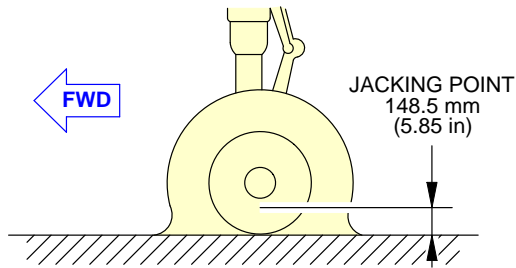

HEIGHT OF JACKING POINT TO GROUND
TO CHANGE/REPLACE THE WHEEL ASSEMBLY

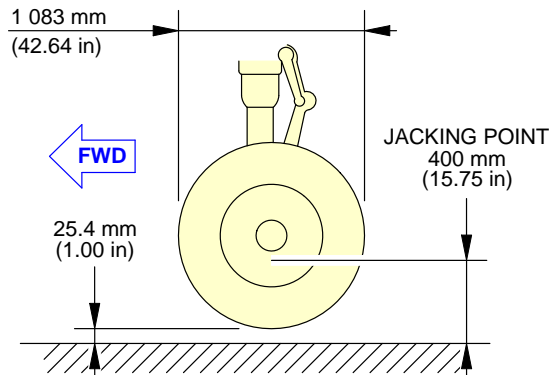

F_AC_021401_1_0280102_01_00

Jacking of the Landing Gear
(Sheet 2 of 2)
FIGURE-2-14-1-991-028-A01

AIRCRAFT PERFORMANCE**3-1-0 General Information******ON A/C A330-700L**General Information

1. Data not published.

GROUND MANEUVERING**4-1-0 General Information******ON A/C A330-700L****General Information**

1. This section gives aircraft turning capability and maneuvering characteristics.

For ease of presentation, this data has been determined from the theoretical limits imposed by the geometry of the aircraft, and where noted, provides for a normal allowance for tire slippage. As such, it reflects the turning capability of the aircraft in favorable operating circumstances. This data should only be used as guidelines for the method of determination of such parameters and for the maneuvering characteristics of this aircraft type.

In the ground operating mode, varying airline practices may demand that more conservative turning procedures be adopted to avoid excessive tire wear and reduce possible maintenance problems. Airline operating techniques will vary in the level of performance, over a wide range of operating circumstances throughout the world. Variations from standard aircraft operating patterns may be necessary to satisfy physical constraints within the maneuvering area, such as adverse grades, limited area or high risk of jet blast damage. For these reasons, ground maneuvering requirements should be coordinated with the airlines in question prior to layout planning.


4-2-0 Turning Radii****ON A/C A330-700L**Turning Radii

1. This section gives the turning radii.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

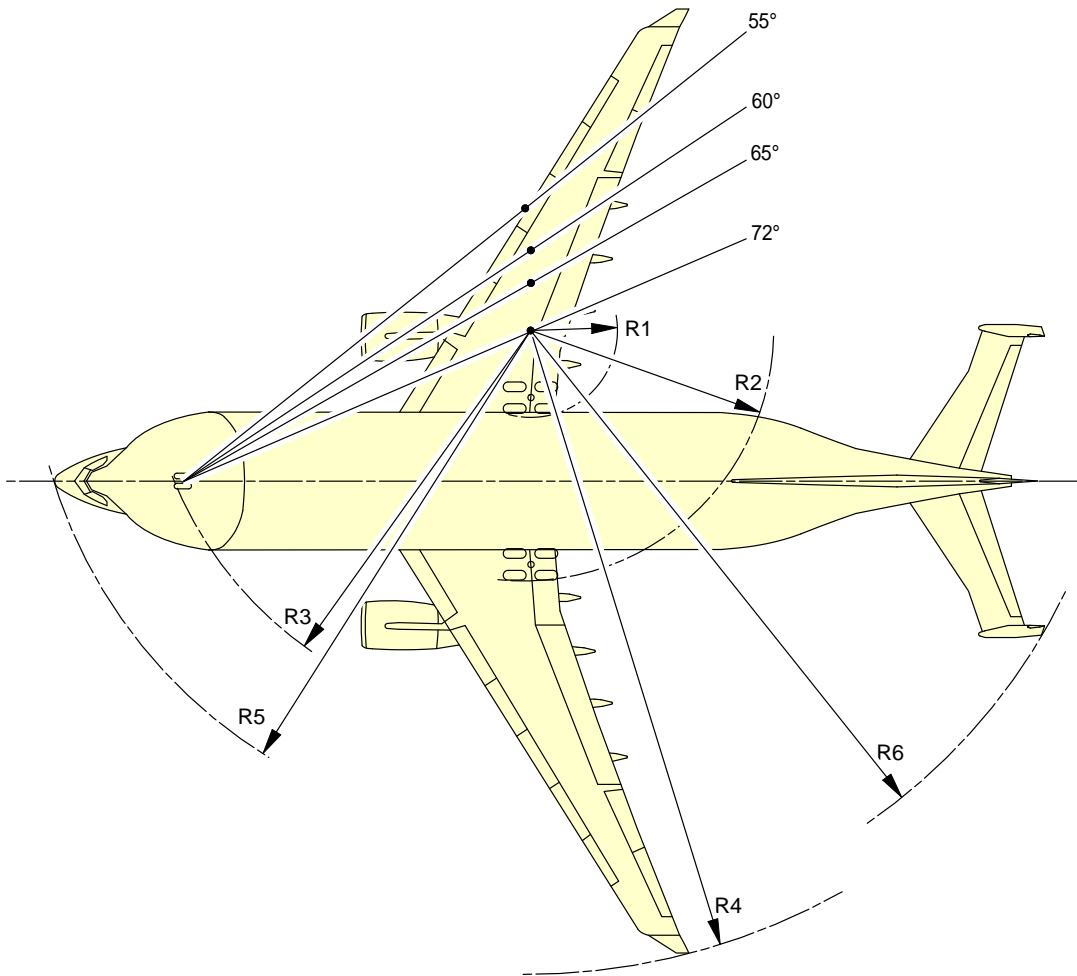

NOTE:
FOR TURNING RADII VALUES, REFER TO SHEET 2.

F_AC_040200_1_0180101_01_00

Turning Radii
(Sheet 1)
FIGURE-4-2-0-991-018-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

**ON A/C A330-700L

BELUGA XL TURNING RADII									
TYPE OF TURN	STEERING ANGLE (deg)	EFFECTIVE STEERING ANGLE (deg)		R1	R2	R3	R4	R5	R6
				RMLG	LMLG	NLG	WING	NOSE	TAIL
2	20	19.2	m	59.3	70.0	68.0	94.4	70.6	80.4
			ft	195	230	223	310	232	264
2	25	23.9	m	45.7	56.4	55.3	80.9	58.5	68.2
			ft	150	185	181	265	192	224
2	30	28.6	m	36.3	47.0	46.8	71.6	50.8	60.1
			ft	119	154	154	235	167	197
2	35	33.3	m	29.4	40.1	40.9	64.7	45.4	54.4
			ft	96	132	134	212	149	178
2	40	38.0	m	24.0	34.7	36.5	59.4	41.6	50.2
			ft	79	114	120	195	136	165
2	45	42.5	m	19.8	30.5	33.2	55.3	38.8	47.1
			ft	65	100	109	181	127	155
2	50	46.9	m	16.4	27.1	30.8	51.9	36.8	44.7
			ft	54	89	101	170	121	147
2	55	51.2	m	13.5	24.1	28.8	49.1	35.2	42.7
			ft	44	79	94	161	115	140
2	60	55.1	m	11.1	21.8	27.4	46.8	34.1	41.3
			ft	36	72	90	154	112	135
2	65	59.6	m	8.6	19.3	26.0	44.4	33	39.8
			ft	28	63	85	146	108	131
2	72	62.0	m	7.4	18.1	25.4	43.2	32.6	39.1
			ft	24	59	83	142	107	128
1	50	48.4	m	15.3	26.0	30.0	50.9	36.2	43.7
			ft	50	85	98	167	119	143
1	55	52.2	m	12.8	23.5	28.4	48.5	34.9	42.4
			ft	42	77	93	159	115	139
1	60	57.7	m	9.6	20.3	26.5	45.4	33.4	40.4
			ft	31	67	87	149	110	133
1	65	62.2	m	7.3	18.0	25.3	43.1	32.5	39
			ft	24	59	83	141	107	128
1	72	68.1	m	4.5	15.2	24.1	40.4	31.6	37.6
			ft	15	50	79	133	104	123

NOTE:

ABOVE 50°, AIRLINES MAY USE TYPE 1 OR TYPE 2 TURNS DEPENDING ON THE SITUATION.

TYPE 1 TURNS USE:

ASYMMETRIC THRUST DURING THE WHOLE TURN AND DIFFERENTIAL BRAKING TO INITIATE THE TURN ONLY.

TYPE 2 TURNS USE:

SYMMETRIC THRUST DURING THE WHOLE TURN AND NO DIFFERENTIAL BRAKING AT ALL.

IT IS POSSIBLE TO GET LOWER VALUES THAN THOSE FROM TYPE 1 BY APPLYING DIFFERENTIAL BRAKING DURING THE WHOLE TURN.

F_AC_040200_1_0190101_01_00

Turning Radii
(Sheet 2)
FIGURE-4-2-0-991-019-A01


4-3-0 Minimum Turning Radii****ON A/C A330-700L**Minimum Turning Radii

1. This section gives the minimum turning radii.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

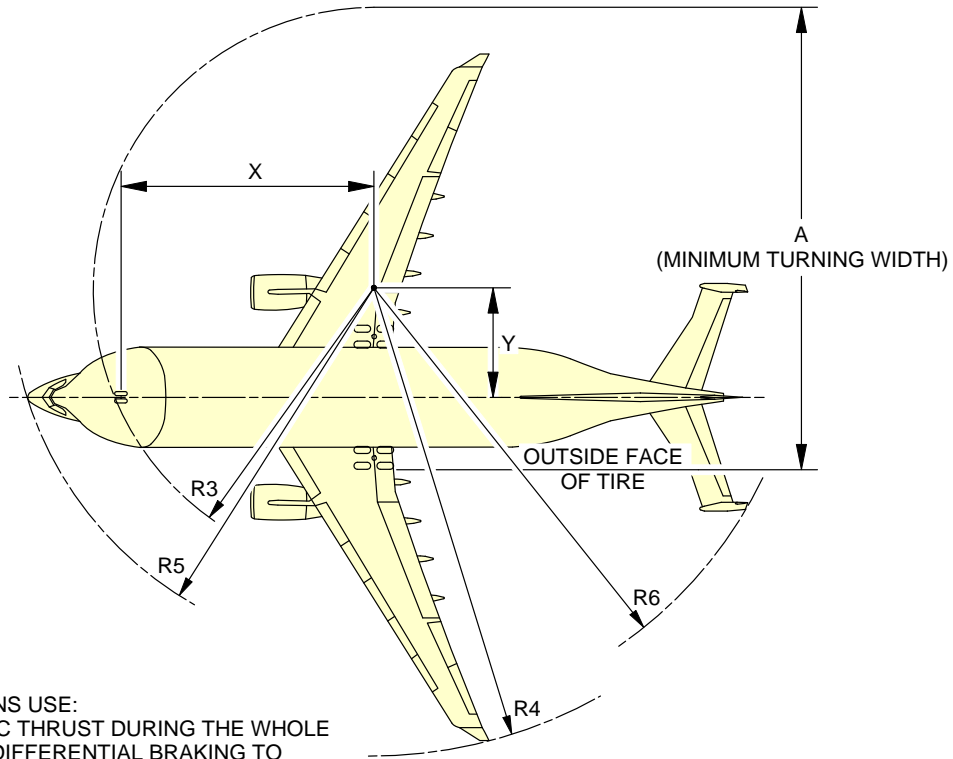

NOTE:
 TYPE 1 TURNS USE:
 ASYMMETRIC THRUST DURING THE WHOLE
 TURN; AND DIFFERENTIAL BRAKING TO
 INITIATE THE TURN ONLY.
 TYPE 2 TURNS USE:
 SYMMETRIC THRUST DURING THE WHOLE
 TURN; AND NO DIFFERENTIAL BRAKING AT ALL.

BELUGA XL MINIMUM TURNING RADII										
TYPE OF TURN	STEERING ANGLE (deg)	EFFECTIVE STEERING ANGLE (deg)		X	Y	A	R3 NLG	R4 WING	R5 NOSE	R6 TAIL
1	72 (MAX)	68.1	m	22.2	8.9	39.7	24.1	40.4	31.6	37.6
			ft	73	29	130	79	133	104	123
2	72 (MAX)	62.0	m	22.2	11.8	43.8	25.4	43.2	32.6	39.1
			ft	73	39	144	83	142	107	128
1	65 (MAX)	62.2	m	22.2	11.7	43.6	25.3	43.1	32.5	39
			ft	73	38	143	83	141	107	128
2	65 (MAX)	59.6	m	22.2	13	45.6	26	44.4	33	39.8
			ft	73	43	150	85	146	108	131

NOTE:
 IT IS POSSIBLE TO GET LOWER VALUES THAN THOSE FROM TYPE 1
 BY APPLYING DIFFERENTIAL BRAKING DURING THE WHOLE TURN.

F_AC_040300_1_0100101_01_00

Minimum Turning Radii
 FIGURE-4-3-0-991-010-A01




4-4-0 Visibility from Cockpit in Static Position****ON A/C A330-700L**Visibility from Cockpit in Static Position

1. This section gives the visibility from cockpit in static position.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

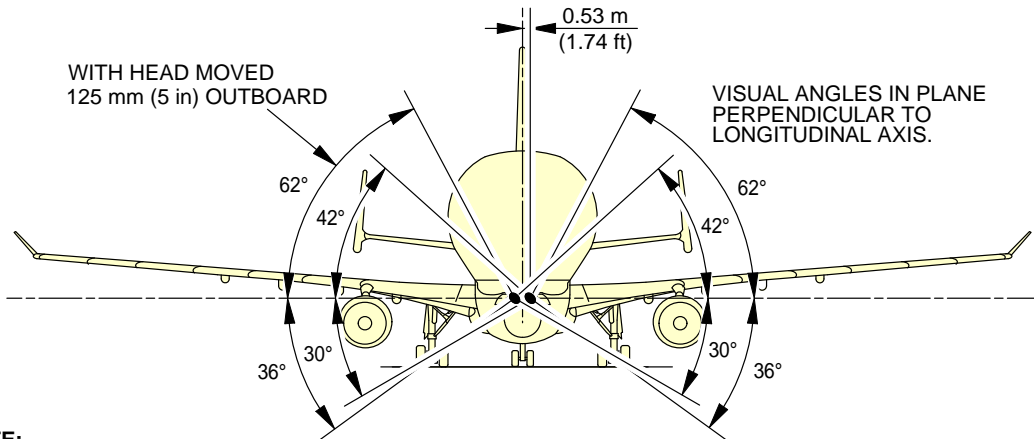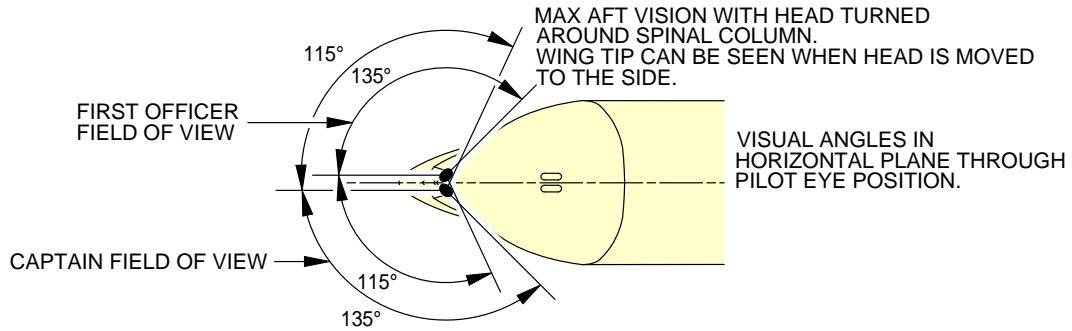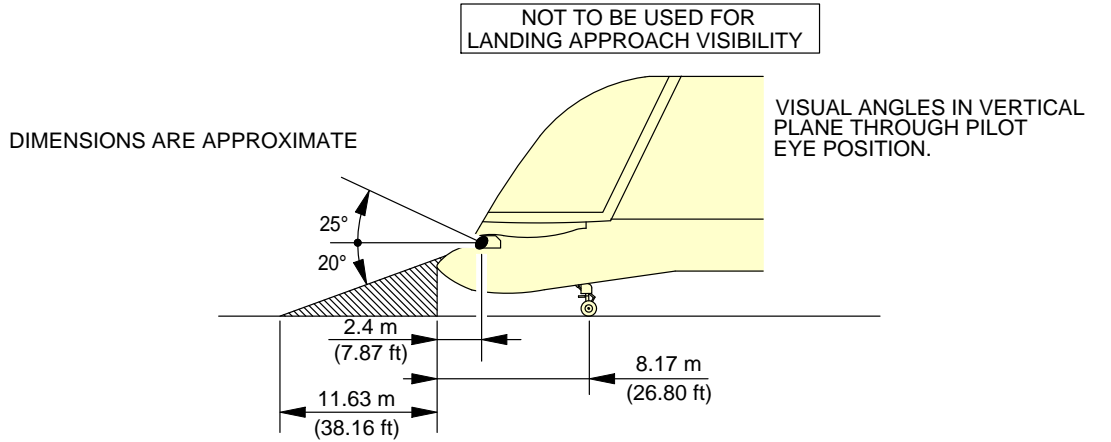

NOTE:


● PILOT EYE POSITION WHEN PILOT'S EYES ARE IN LINE WITH THE RED AND WHITE BALLS.

ZONE THAT CANNOT BE SEEN

F_AC_040400_1_0100101_01_00

Visibility from Cockpit in Static Position
FIGURE-4-4-0-991-010-A01

****ON A/C A330-700L**

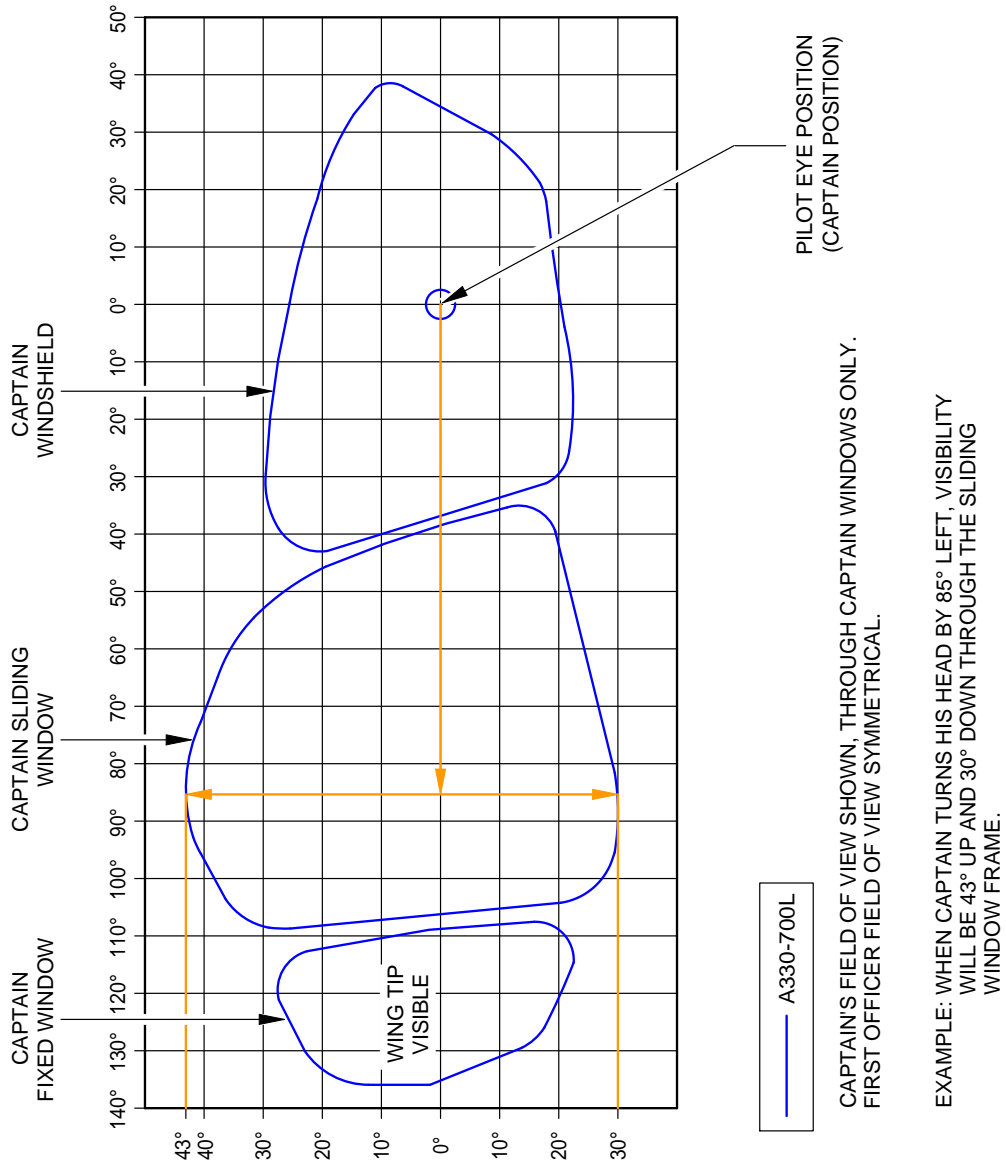

F_AC_040400_1_0110101_01_00

Binocular Visibility Through Windows from Captain Eye Position
 FIGURE-4-4-0-991-011-A01

4-5-0 Runway and Taxiway Turn Paths****ON A/C A330-700L**Runway and Taxiway Turn Paths

1. Runway and Taxiway Turn Paths.


4-5-1 135° Turn - Runway to Taxiway****ON A/C A330-700L**135° Turn - Runway to Taxiway

1. This section gives the 135° turn - runway to taxiway.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

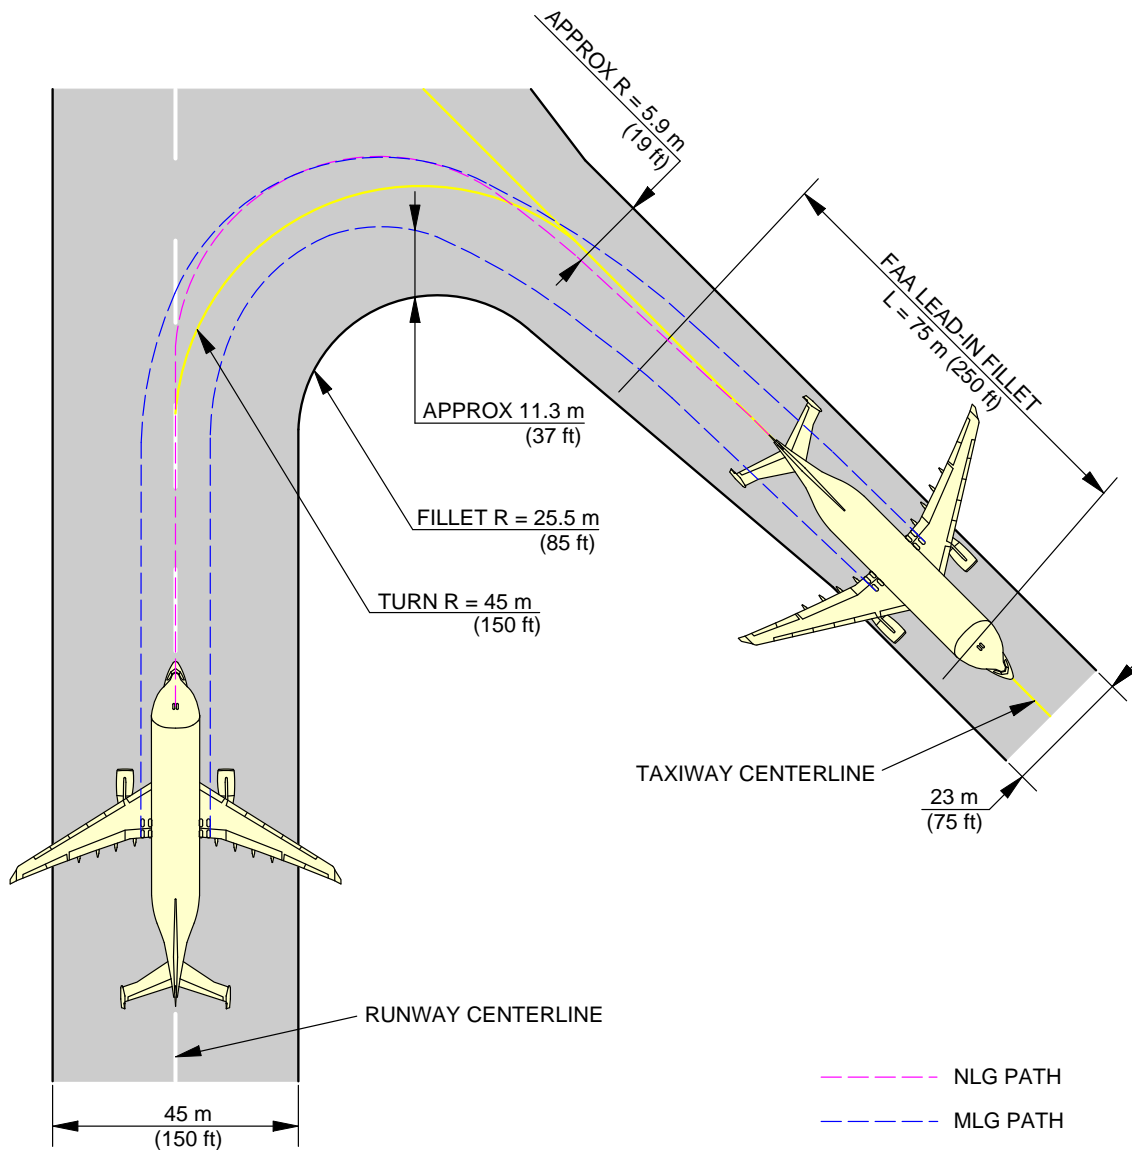


F_AC_040501_1_0130101_01_00

135° Turn - Runway to Taxiway
Judgemental Oversteer Method
FIGURE-4-5-1-991-013-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

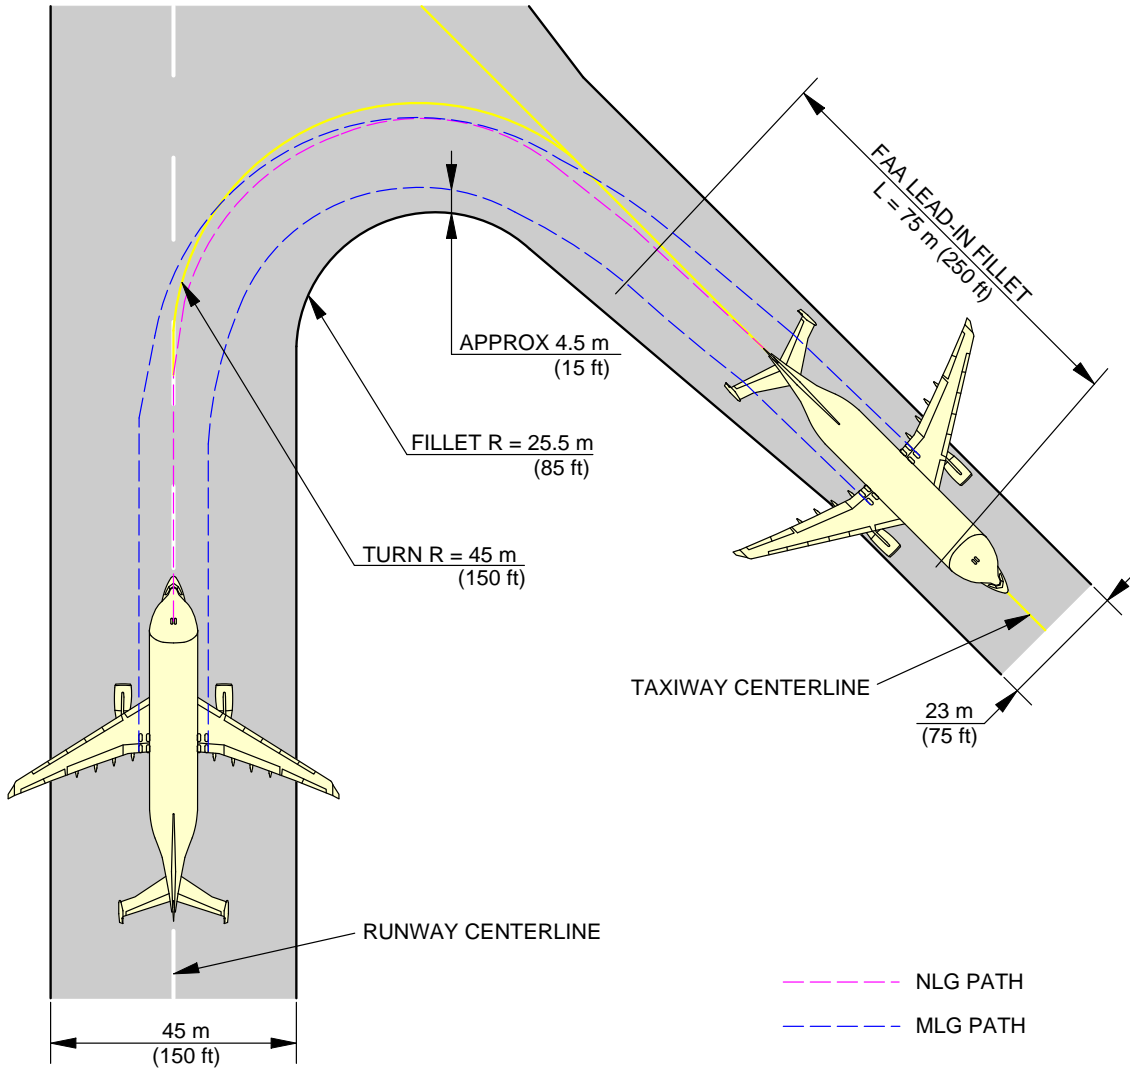

F_AC_040501_1_0140101_01_00

135° Turn - Runway to Taxiway
Cockpit Over Centerline Method
FIGURE-4-5-1-991-014-A01


4-5-2 90° Turn - Runway to Taxiway****ON A/C A330-700L**90° Turn - Runway to Taxiway

1. This section gives the 90° turn - runway to taxiway.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

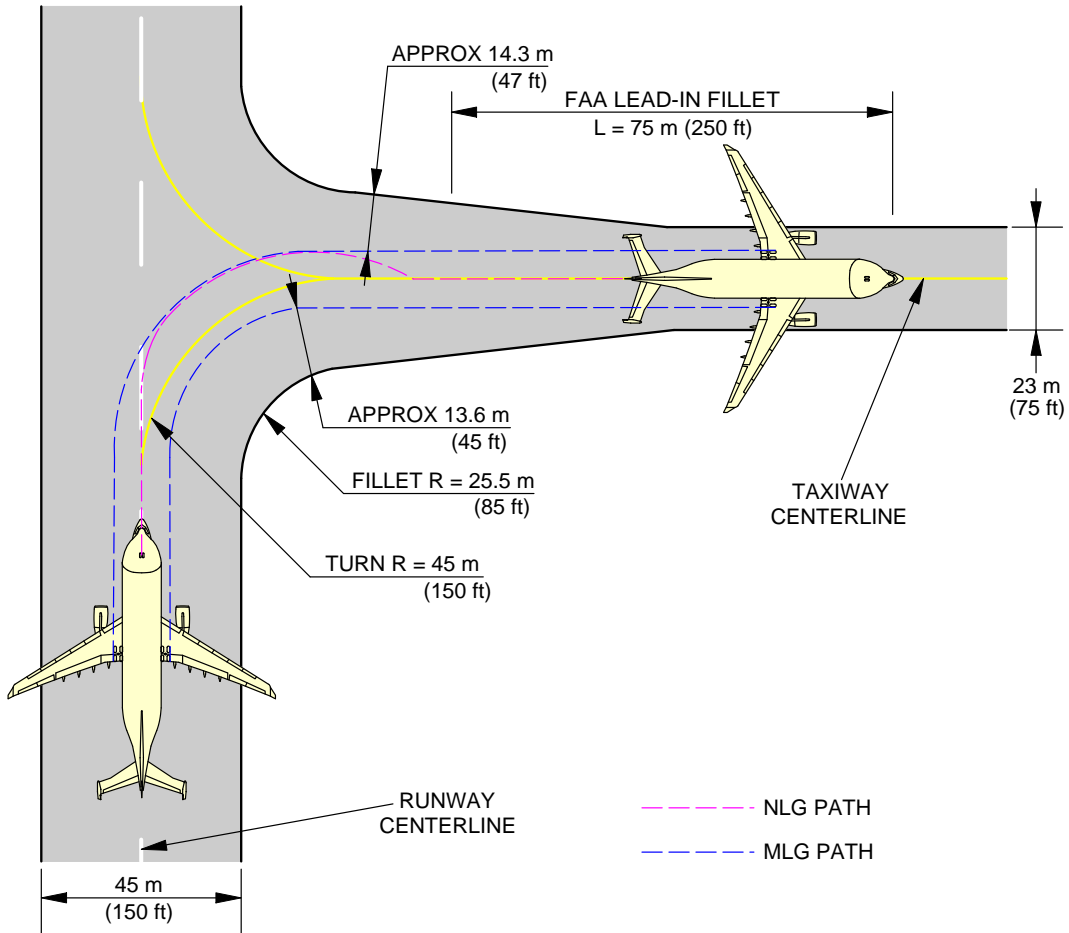


F_AC_040502_1_0150101_01_00

90° Turn - Runway to Taxiway
Judgemental Oversteer Method
FIGURE-4-5-2-991-015-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

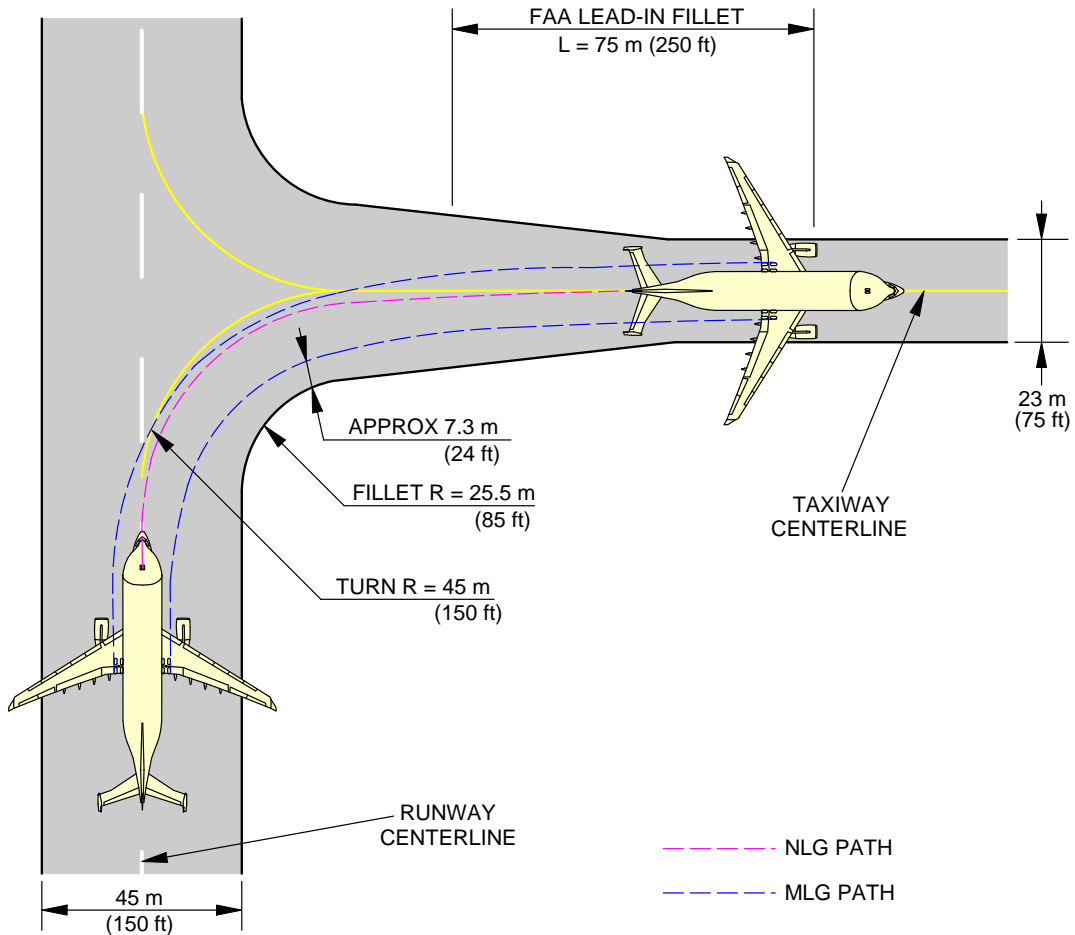

F_AC_040502_1_0160101_01_00

90° Turn - Runway to Taxiway
Cockpit Over Centerline Method
FIGURE-4-5-2-991-016-A01


4-5-3 180° Turn on a Runway****ON A/C A330-700L**180° Turn on a Runway

- | 1. This section gives the 180° turn on a runway .

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

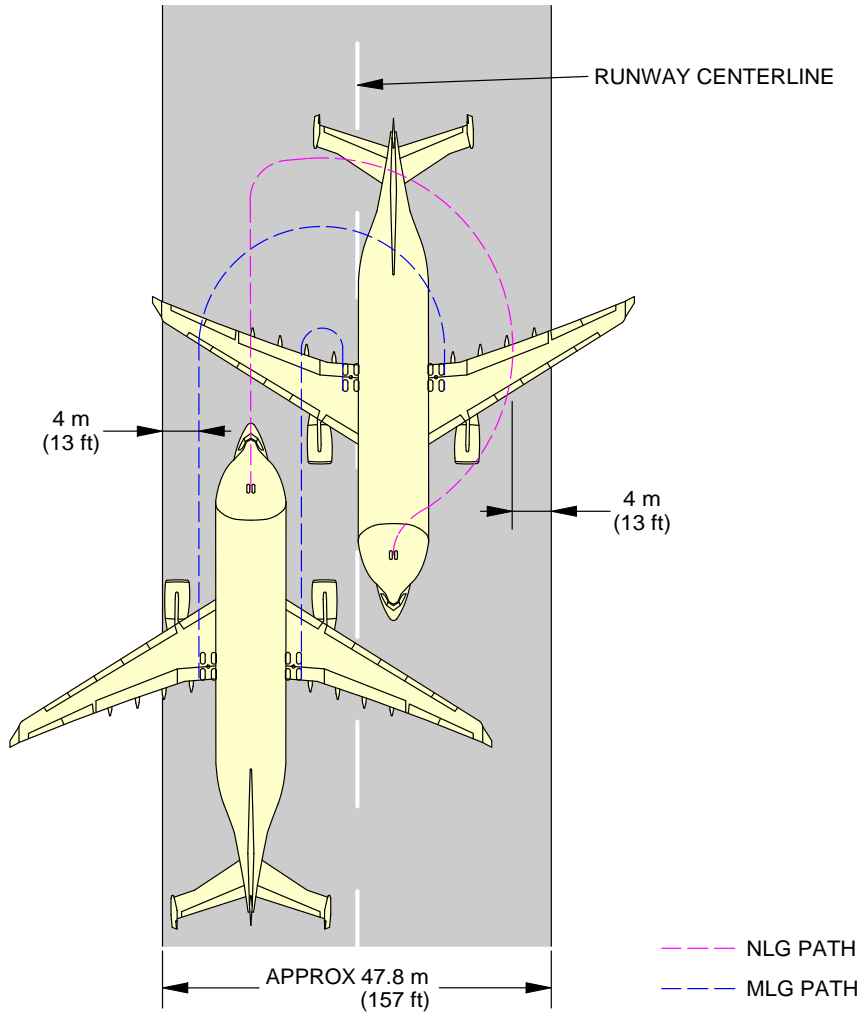

F_AC_040503_1_0170101_01_01

180° Turn on a Runway
FIGURE-4-5-3-991-017-A01


4-5-4 135° Turn - Taxiway to Taxiway****ON A/C A330-700L**135° Turn - Taxiway to Taxiway

1. This section gives the 135° turn - taxiway to taxiway.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

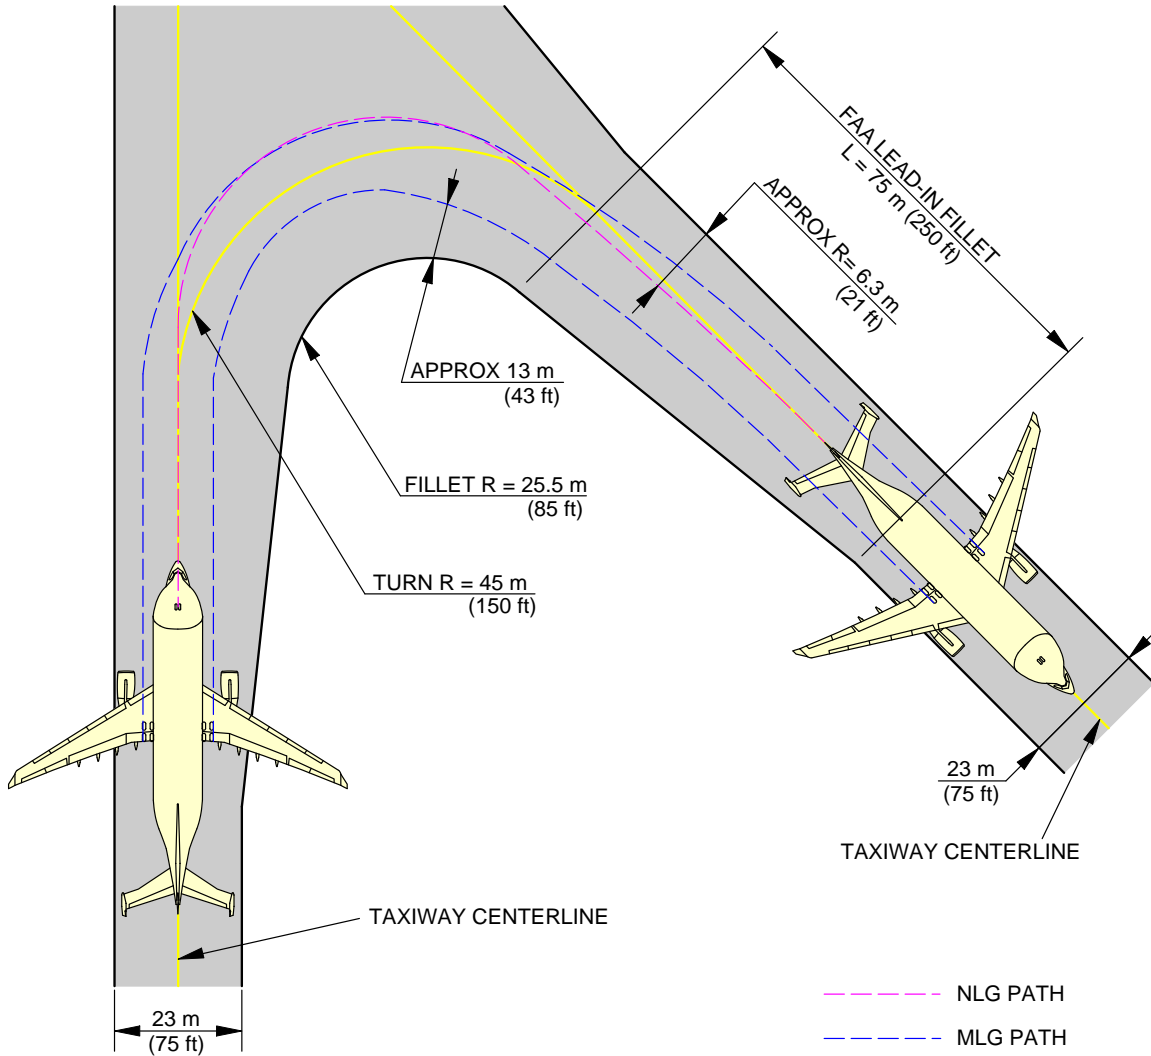


F_AC_040504_1_0150101_01_00

135° Turn - Taxiway to Taxiway
Judgemental Oversteer Method
FIGURE-4-5-4-991-015-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

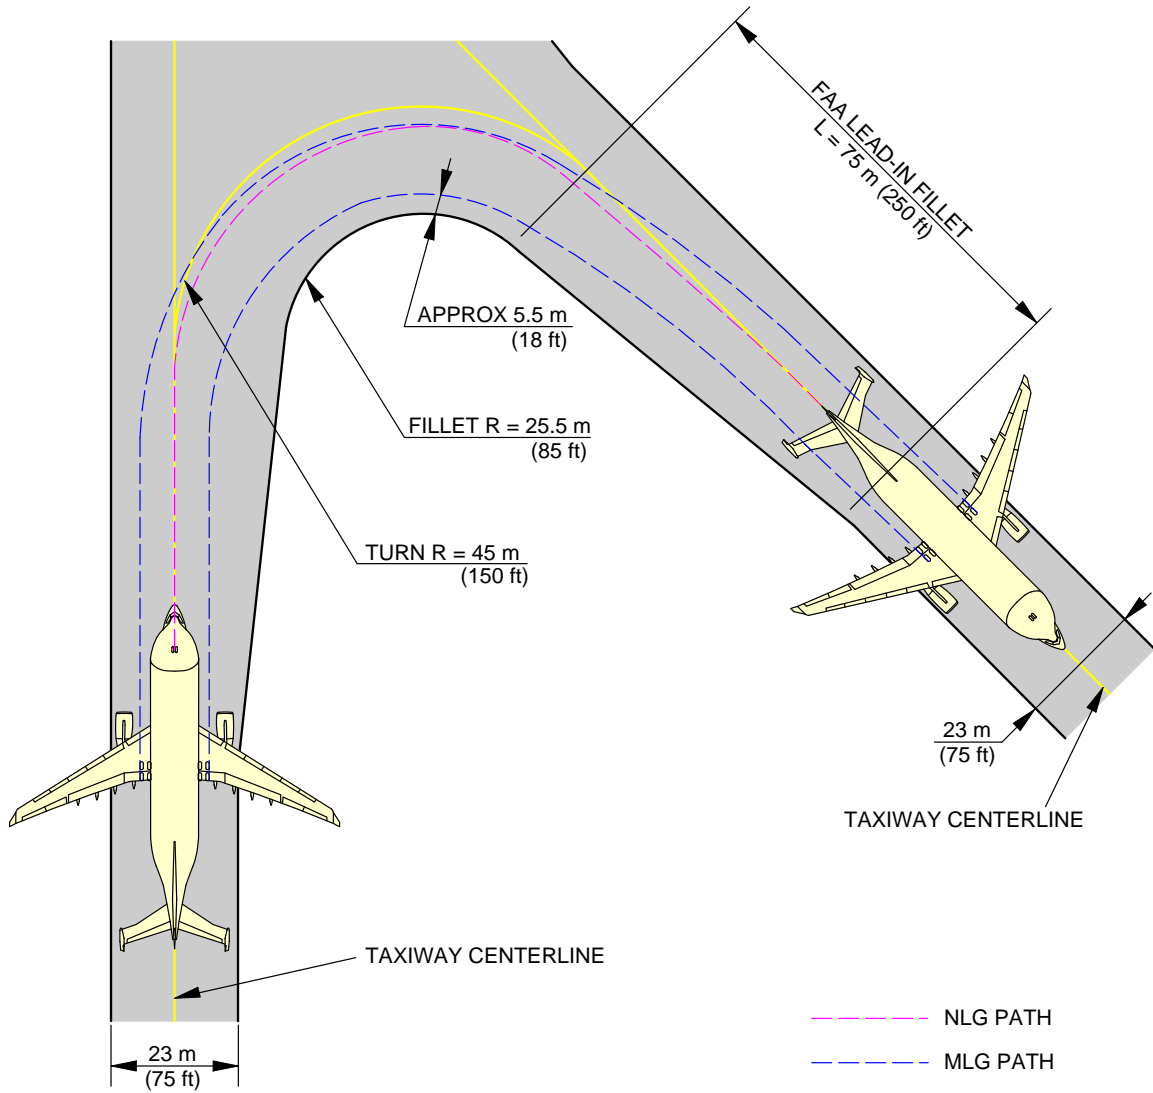

F_AC_040504_1_0160101_01_00

135° Turn - Taxiway to Taxiway
Cockpit Over Centerline Method
FIGURE-4-5-4-991-016-A01


4-5-5 90° Turn - Taxiway to Taxiway****ON A/C A330-700L**90° Turn - Taxiway to Taxiway

1. This section gives the 90° turn - taxiway to taxiway.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING


****ON A/C A330-700L**

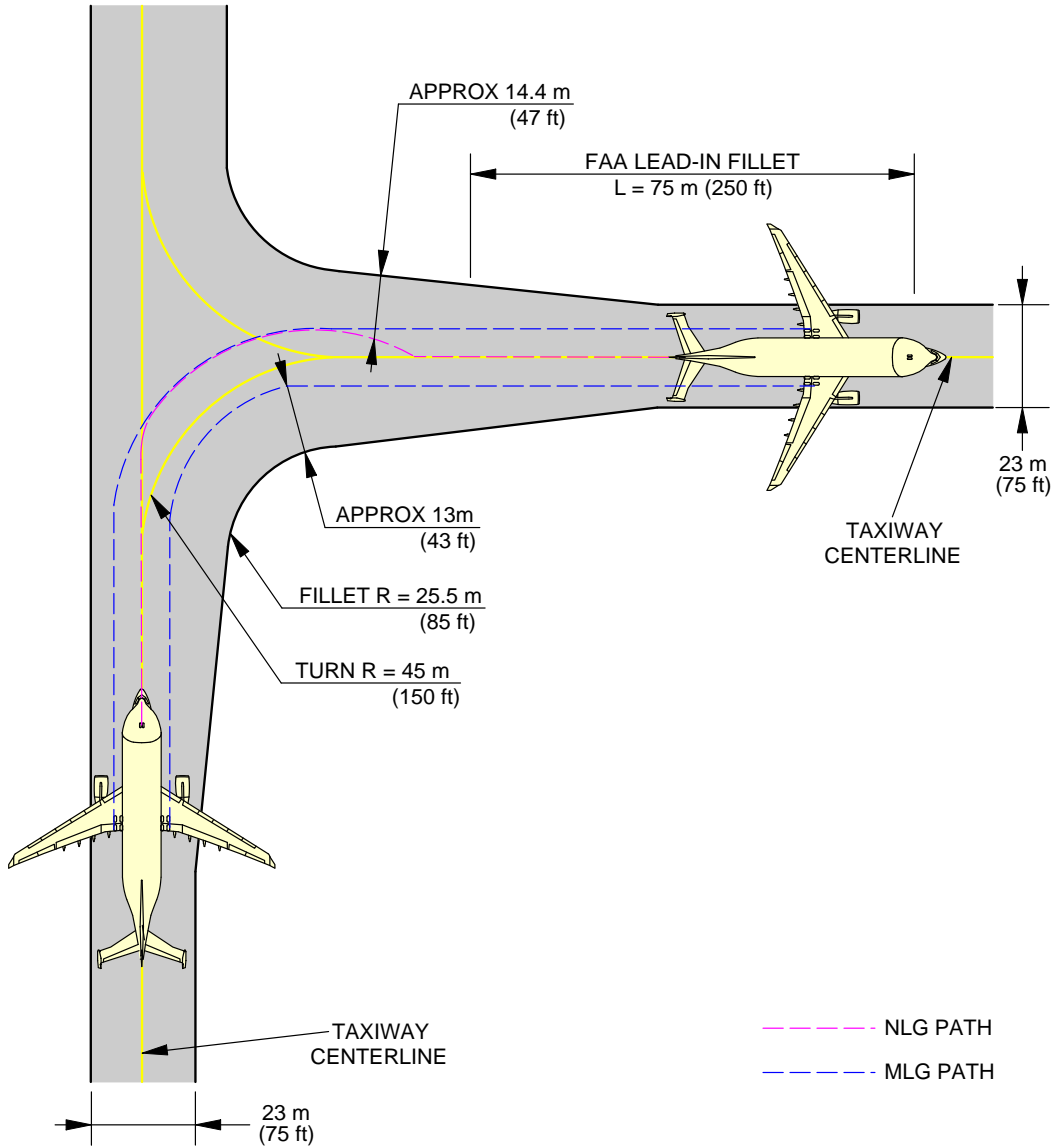

F_AC_040505_1_0170101_01_00

90° Turn - Taxiway to Taxiway
Judgemental Oversteer Method
FIGURE-4-5-5-991-017-A01

****ON A/C A330-700L**

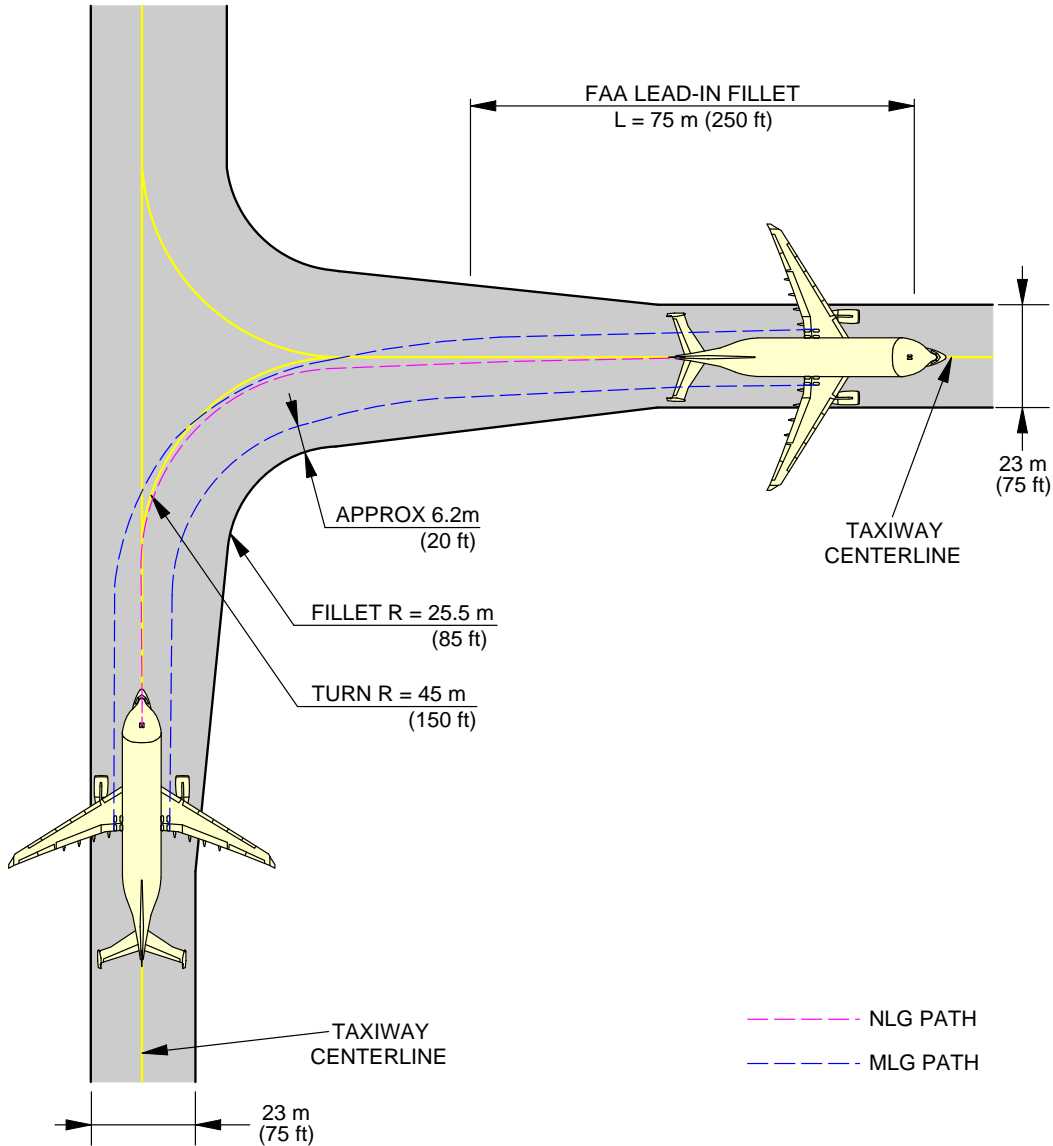

F_AC_040505_1_0180101_01_00

90° Turn - Taxiway to Taxiway
Cockpit Over Centerline Method
FIGURE-4-5-5-991-018-A01


4-6-0 Runway Holding Bay (Apron)****ON A/C A330-700L**Runway Holding Bay (Apron)

1. This section gives the runway holding bay (Apron).

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

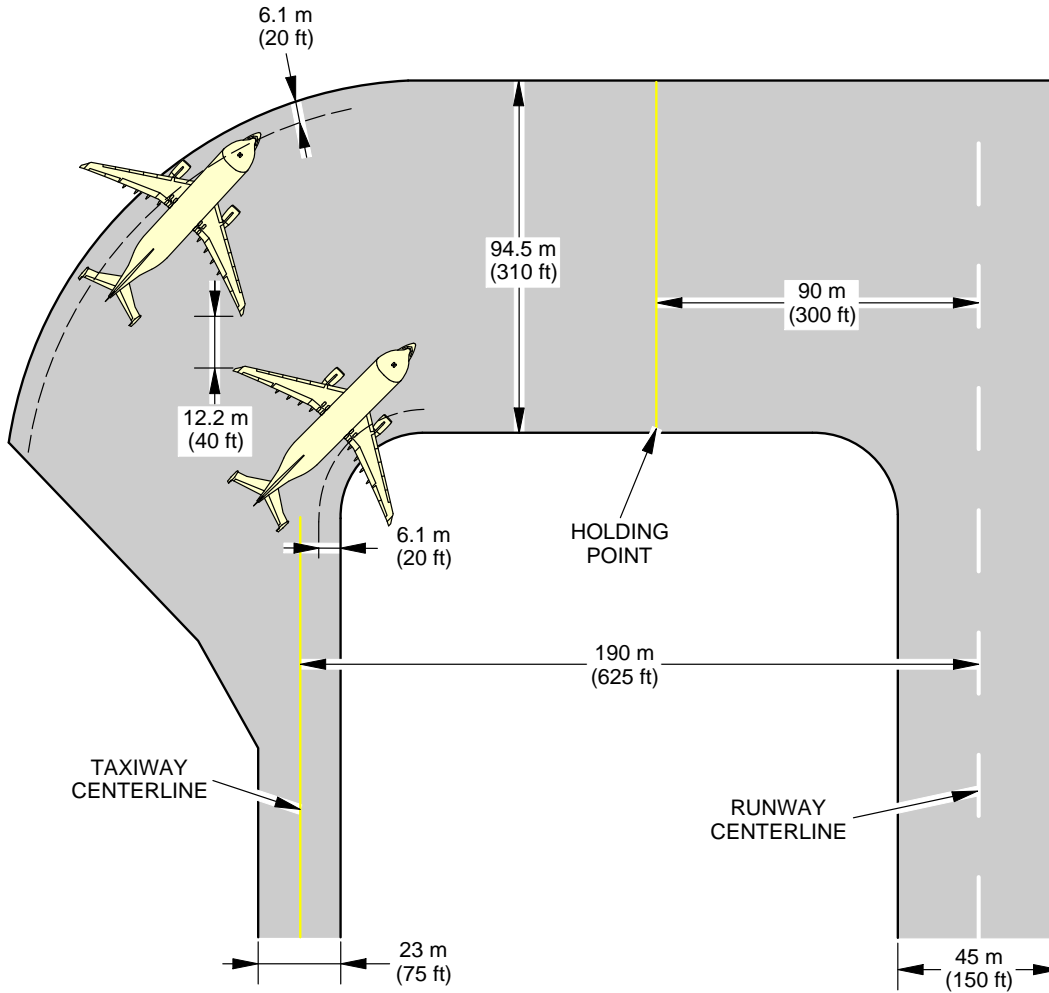

NOTE:

COORDINATE WITH USING AIRLINE FOR SPECIFIC PLANNED OPERATING PROCEDURES.

F_AC_040600_1_0070101_01_00

Runway Holding Bay (Apron)
FIGURE-4-6-0-991-007-A01

4-7-0 Minimum Line-Up Distance Corrections

**ON A/C A330-700L

Minimum Line-Up Distance Corrections

1. The ground maneuvers were performed using asymmetric thrust and differential-only braking to initiate the turn.

TODA: Take-Off Distance Available

ASDA: Acceleration-Stop Distance Available

2. 90° Turn on Runway Entry

This section gives the minimum line-up distance correction for a 90° turn on runway entry.

This maneuver consists in a 90° turn at minimum turn radius. It starts with the edge of the MLG at a distance of 4.5 m (15 ft) from the taxiway edge, and finishes with the aircraft aligned on the centerline of the runway, see FIGURE 4-7-0-991-028-A.

During the turn, all the clearances must meet the minimum value of 4.5 m (15 ft) for this category of aircraft as recommended in ICAO Annex 14.

3. 180° Turn on Runway Turn Pad

This section gives the minimum line-up distance correction for a 180° turn on the runway turn pad.

This maneuver consists in a 180° turn at minimum turn radius on a runway turn pad with standard ICAO geometry.

It starts with the edge of the MLG at a distance of 4.5 m (15 ft) from the pavement edge, and it finishes with the aircraft aligned on the centerline of the runway, see FIGURE 4-7-0-991-029-A.

During the turn, all the clearances must meet the minimum value of 4.5 m (15 ft) for this category of aircraft as recommended in ICAO Annex 14.

4. 180° Turn on Runway Width

This section gives the minimum line-up distance correction for a 180° turn on the runway width. For this maneuver, the pavement width is considered to be the runway width, which is a frozen parameter (45 m (150 ft) and 60 m (200 ft)).

As per the standard operating procedures for the "180° turn on runway" (described in the Flight Crew Operating Manual), the aircraft is initially angled with respect to the runway centerline when starting the 180° turn, see FIGURE 4-7-0-991-030-A.


The value of this angle depends on the aircraft type and is mentioned in the FCOM.

During the turn, all the clearances must meet the minimum value of 4.5 m (15 ft) for this category of aircraft as recommended in ICAO Annex 14.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

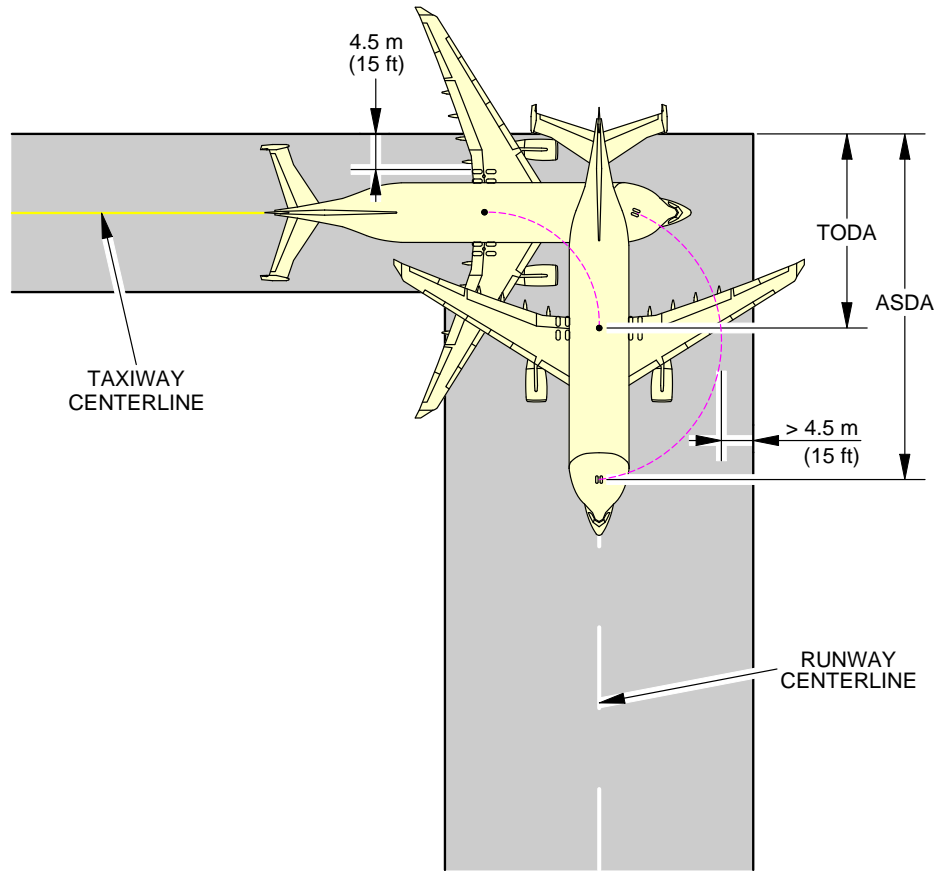

90° TURN ON RUNWAY ENTRY					
AIRCRAFT TYPE	MAX STEERING ANGLE	45 m (150 ft)/60 m (200 ft) WIDE RUNWAY			
		MINIMUM LINE-UP DISTANCE CORRECTION			
		ON TODA		ON ASDA	
A330-700L	65°	22.5 m	74 ft	44.7 m	147 ft
A330-700L	72°	19.7 m	65 ft	41.9 m	137 ft

NOTE:

ASDA: ACCELERATION-STOP DISTANCE AVAILABLE

TODA: TAKE-OFF DISTANCE AVAILABLE


F_AC_040700_1_0280101_01_00

Minimum Line-Up Distance Corrections
90° Turn on Runway Entry
FIGURE-4-7-0-991-028-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

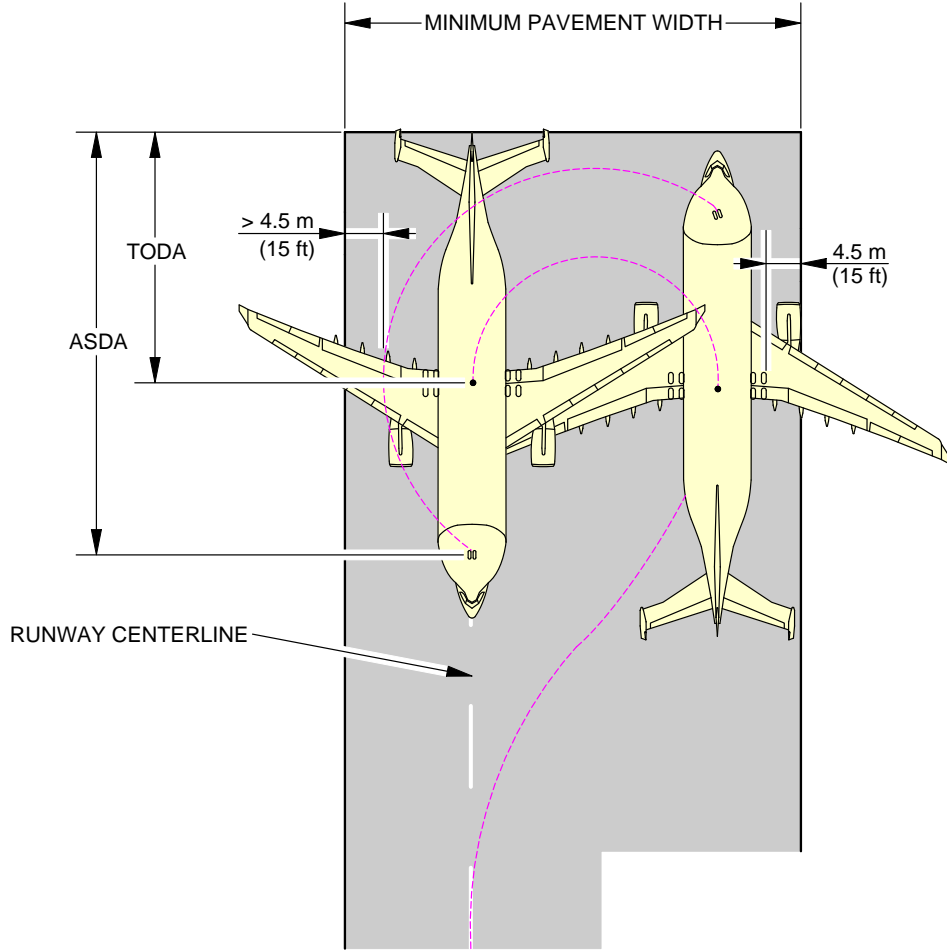

180° TURN ON RUNWAY TURNPAD							
AIRCRAFT TYPE	MAX STEERING ANGLE	45 m (150 ft)/60 m (200 ft) WIDE RUNWAY				REQUIRED MINIMUM PAVEMENT WIDTH	
		MINIMUM LINE-UP DISTANCE CORRECTION					
		ON TODA		ON ASDA			
A330-700L	65°	30.1 m	99 ft	52.2 m	171 ft	56.7 m	186 ft
A330-700L	72°	28.9 m	95 ft	51.1 m	168 ft	51.1 m	168 ft

NOTE:

ASDA: ACCELERATION-STOP DISTANCE AVAILABLE
 TODA: TAKE-OFF DISTANCE AVAILABLE


F_AC_040700_1_0290101_01_00

Minimum Line-Up Distance Corrections
 180° Turn on Runway Turn Pad
 FIGURE-4-7-0-991-029-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

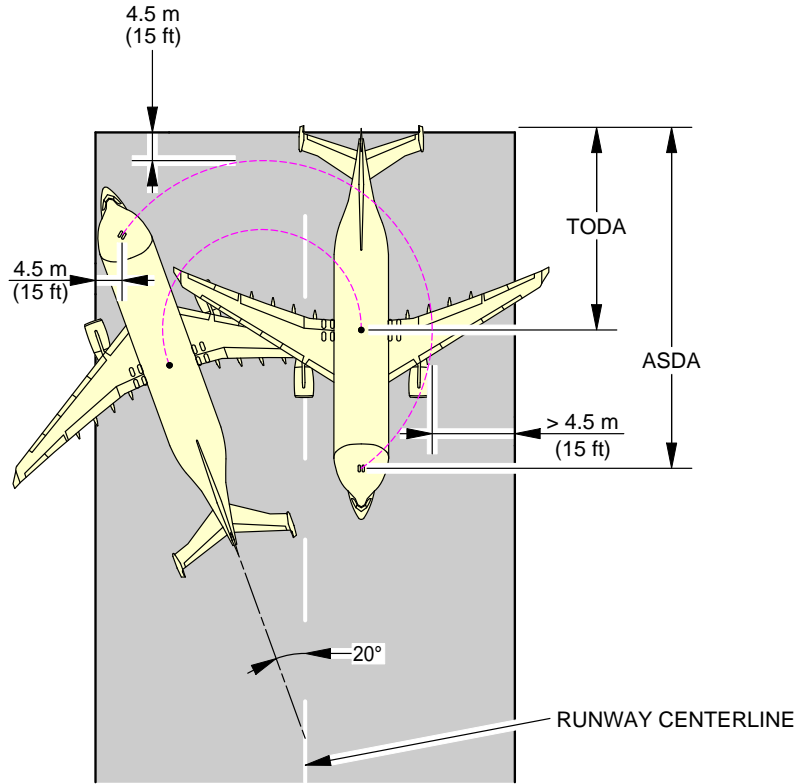

180° TURN ON RUNWAY WIDTH							
AIRCRAFT TYPE	MAX STEERING ANGLE	45 m (150 ft) WIDE RUNWAY (STANDARD WIDTH)		60 m (200 ft) WIDE RUNWAY			
		MINIMUM LINE-UP DISTANCE CORRECTION		MINIMUM LINE-UP DISTANCE CORRECTION			
		ON TODA	ON ASDA	ON TODA	ON ASDA	ON ASDA	ON ASDA
A330-700L	65°			44.5 m	146 ft	66.6 m	219 ft
A330-700L	72°	NOT POSSIBLE		28.9 m	95 ft	51.1 m	168 ft

NOTE:

ASDA: ACCELERATION-STOP DISTANCE AVAILABLE
TODA: TAKE-OFF DISTANCE AVAILABLE

F_AC_040700_1_0300101_01_00

Minimum Line-Up Distance Corrections
180° Turn on Runway Width
FIGURE-4-7-0-991-030-A01


4-8-0 Aircraft Mooring****ON A/C A330-700L**Aircraft Mooring

1. This section gives information on aircraft mooring.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

**ON A/C A330-700L

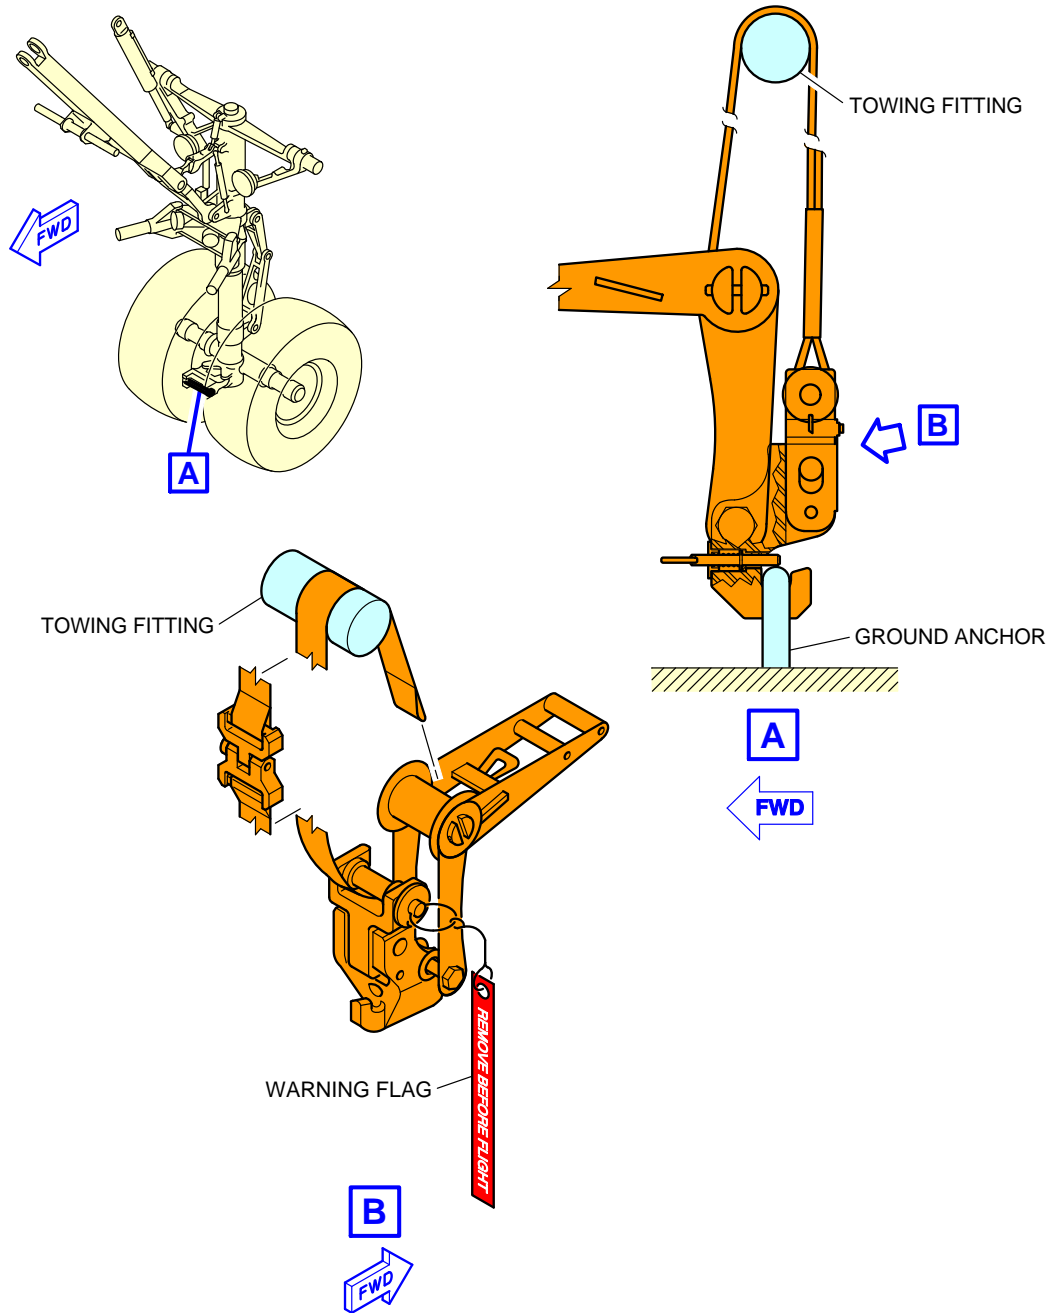

F_AC_040800_1_0020101_01_00

Aircraft Mooring
FIGURE-4-8-0-991-002-A01

TERMINAL SERVICING**5-1-0 Aircraft Servicing Arrangements******ON A/C A330-700L****Aircraft Servicing Arrangements****1. Aircraft Servicing Arrangements**

- A. This section provides typical ramp layouts, showing the various GSE items in position during typical turn-round scenarios for cargo aircraft. These ramp layouts show typical arrangements only. Each operator will have its own specific requirements/regulations for positioning and operation on the ramp.

5-1-1 Symbols Used on Servicing Diagrams****ON A/C A330-700L**Symbols Used on Servicing Diagrams

1. This table gives the symbols used on servicing diagrams.

Ground Support Equipment	
AC	AIR CONDITIONING UNIT
AS	AIR START UNIT
BULK	BULK TRAIN
CB	CONVEYOR BELT
FUEL	FUEL HYDRANT DISPENSER or TANKER
GPU	GROUND POWER UNIT
ILF	INTEGRATED LOADING FACILITIES
LD CL	LOWER DECK CARGO LOADER
LV	LAVATORY VEHICLE
TOW	TOW TRACTOR
ULD	ULD TRAIN


5-1-2 Typical Ramp Layout - Open Apron****ON A/C A330-700L**05-01-02 Typical Ramp Layout

1. This section gives information about the typical ramp layout.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

**ON A/C A330-700L

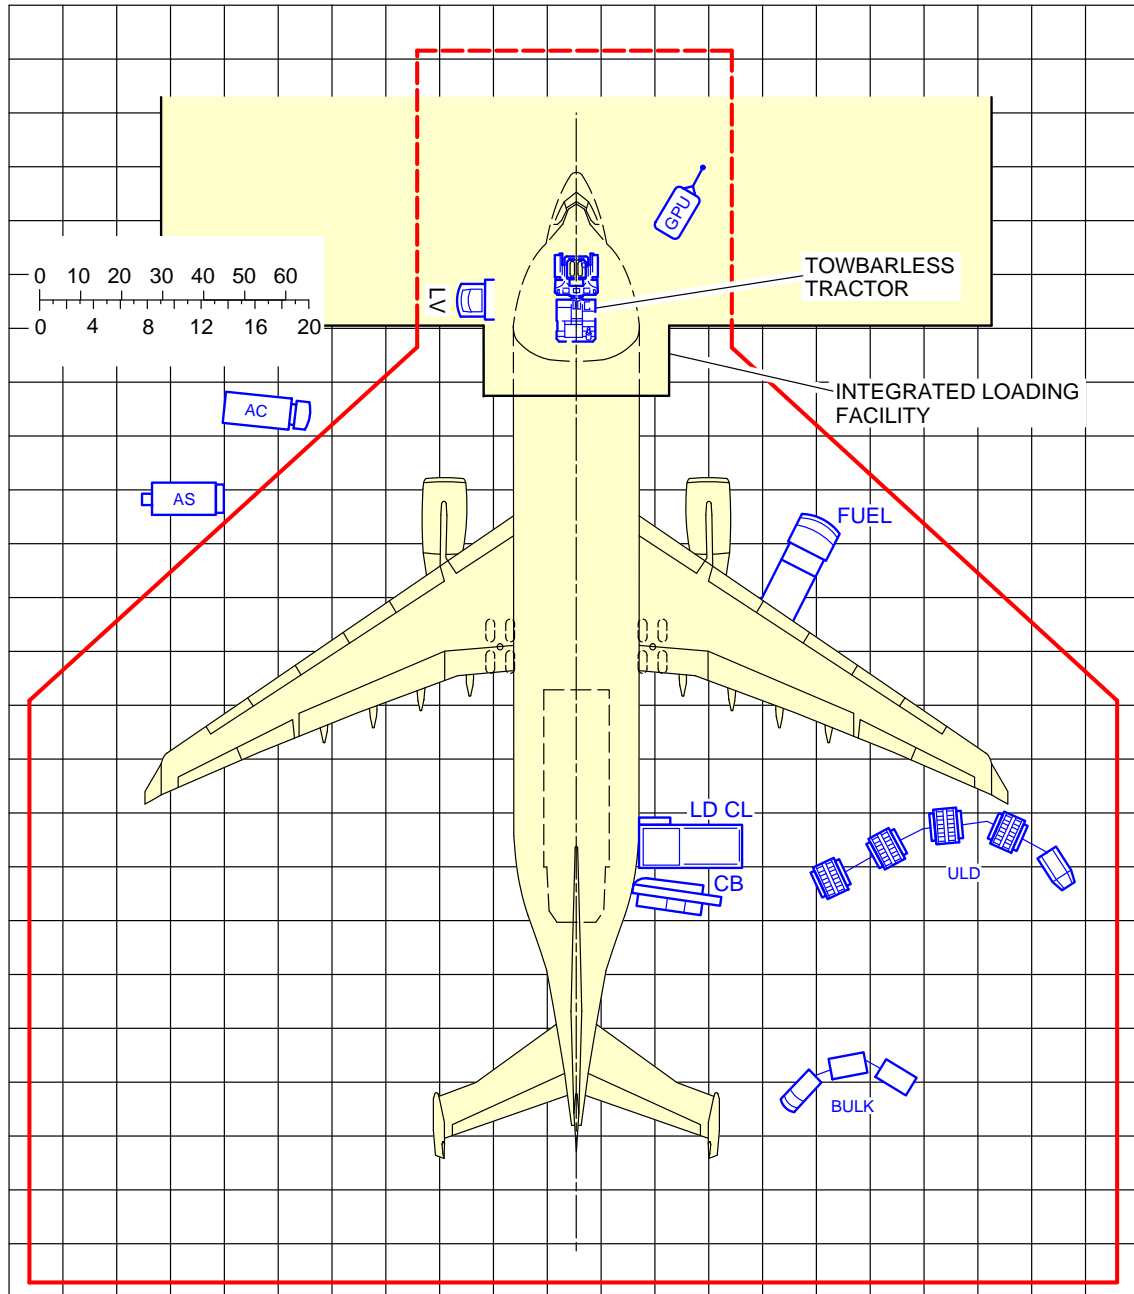

NOTE:

— STAND SAFETY LINE

F_AC_050102_1_0120101_01_02

Typical Ramp Layout
FIGURE-5-1-2-991-012-A01


5-4-1 Ground Service Connections Layout****ON A/C A330-700L**Ground Service Connections Layout

1. This section gives the ground service connections layout.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

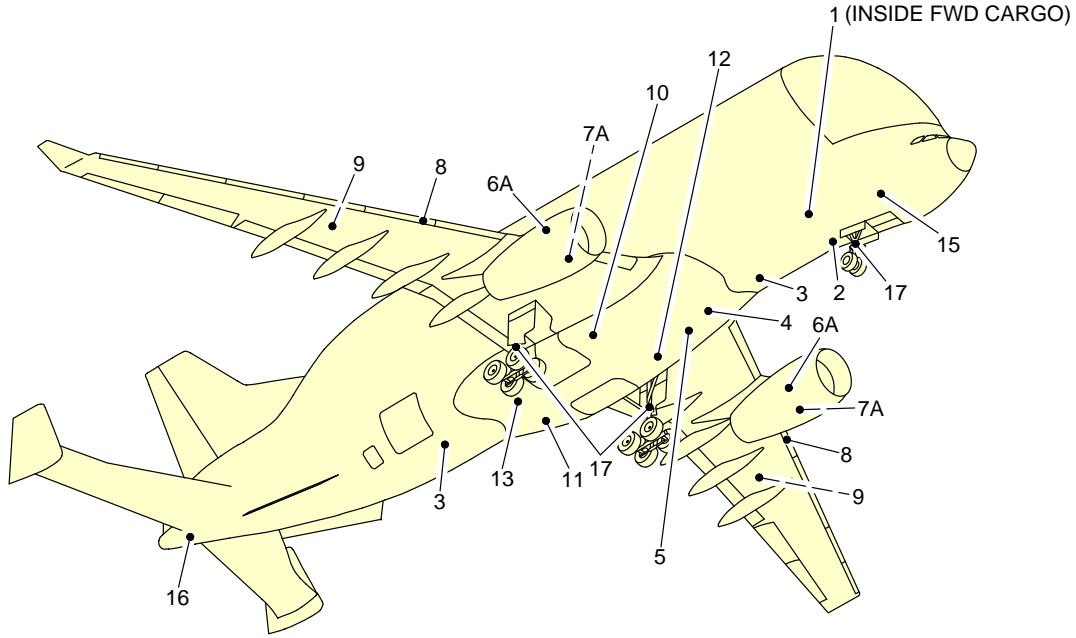

- | | |
|--|--|
| 1 - OXYGEN SERVICING | 10 - HYDRAULIC GROUND POWER SUPPLY (YELLOW) |
| 2 - GROUND ELECTRICAL POWER CONNECTORS | 11 - HYDRAULIC RESERVOIR FILLING AND GROUND POWER SUPPLY (GREEN) |
| 3 - POTABLE WATER DRAIN | 12 - HYDRAULIC RESERVOIR AIR PRESSURIZATION AND GROUND POWER SUPPLY (BLUE) |
| 4 - LOW PRESSURE AIR PRE-CONDITIONING | 13 - REFUEL/DEFUEL PANEL |
| 5 - HIGH PRESSURE AIR PRE-CONDITIONING AND ENGINE STARTING | 15 - WASTE WATER SERVICE PANEL |
| 6A - ENGINE OIL FILLING | 16 - APU OIL FILLING |
| 7A - IDG OIL FILLING | 17 - GROUNDING (EARTHING) POINT |
| 8 - PRESSURE REFUEL/DEFUEL COUPLINGS | |
| 9 - OVERWING REFUEL | |

F_AC_050401_1_0070101_01_00

Ground Service Connections Layout
FIGURE-5-4-1-991-007-A01

5-4-2 Grounding Points

****ON A/C A330-700L**

Grounding (Earthing) Points

1. Grounding (Earthing) Points

NOTE : The mean height from ground in the below table may change according to the CG position and aircraft weight.

ACCESS	DISTANCE			MEAN HEIGHT FROM GROUND
	AFT OF NOSE	FROM AIRCRAFT CENTERLINE		
		LH SIDE	RH SIDE	
On NLG leg	8.17 m (26.80 ft)	On centerline		1.40 m (4.59 ft)
On left MLG leg	32.1 m (105.31 ft)	5.34 m (17.52 ft)		1.50 m (4.92 ft)
On right MLG leg	32.1 m (105.31 ft)		5.34 m (17.52 ft)	1.50 m (4.92 ft)


- A. The grounding (earthing) stud on each landing gear leg is designed for use with a clip-on connector (such as Appleton TGR).
- B. The grounding (earthing) studs are used to connect the aircraft to an approved ground (earth) connection on the ramp or in the hangar for:
 - Refuel/defuel operations
 - Maintenance operations
 - Bad weather conditions
 - Loading/Unloading operations.

NOTE : In all other conditions, the electrostatic discharge through the tire is sufficient.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

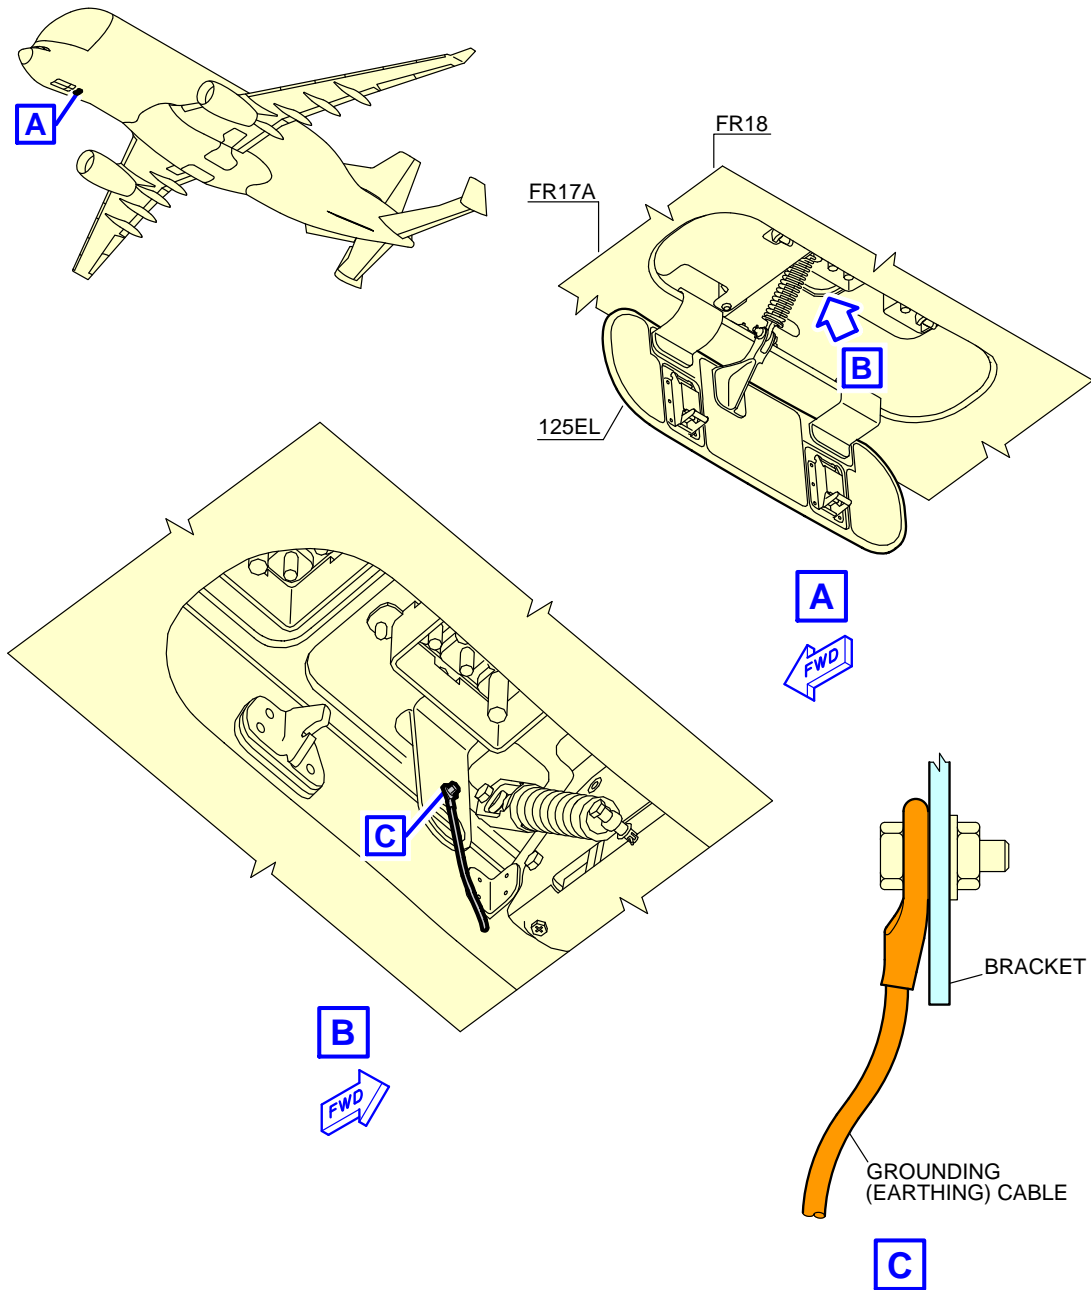



F_AC_050402_1_0060101_01_00

Ground Service Connections
Grounding (Earthing) Points
FIGURE-5-4-2-991-006-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

**ON A/C A330-700L

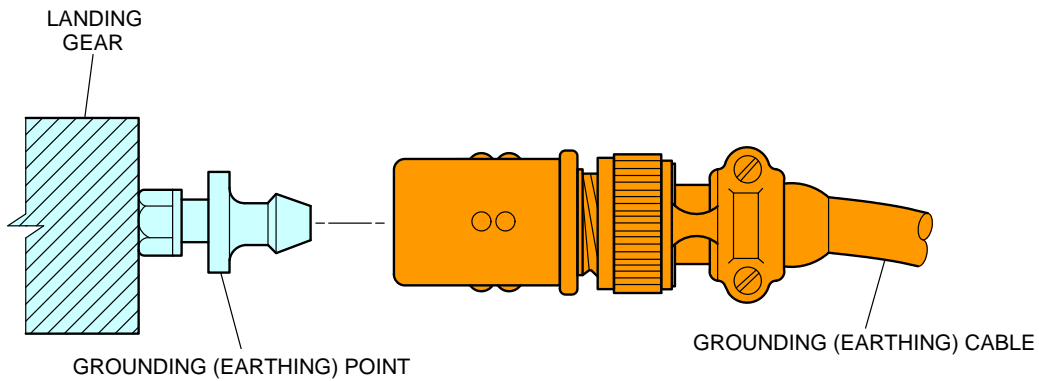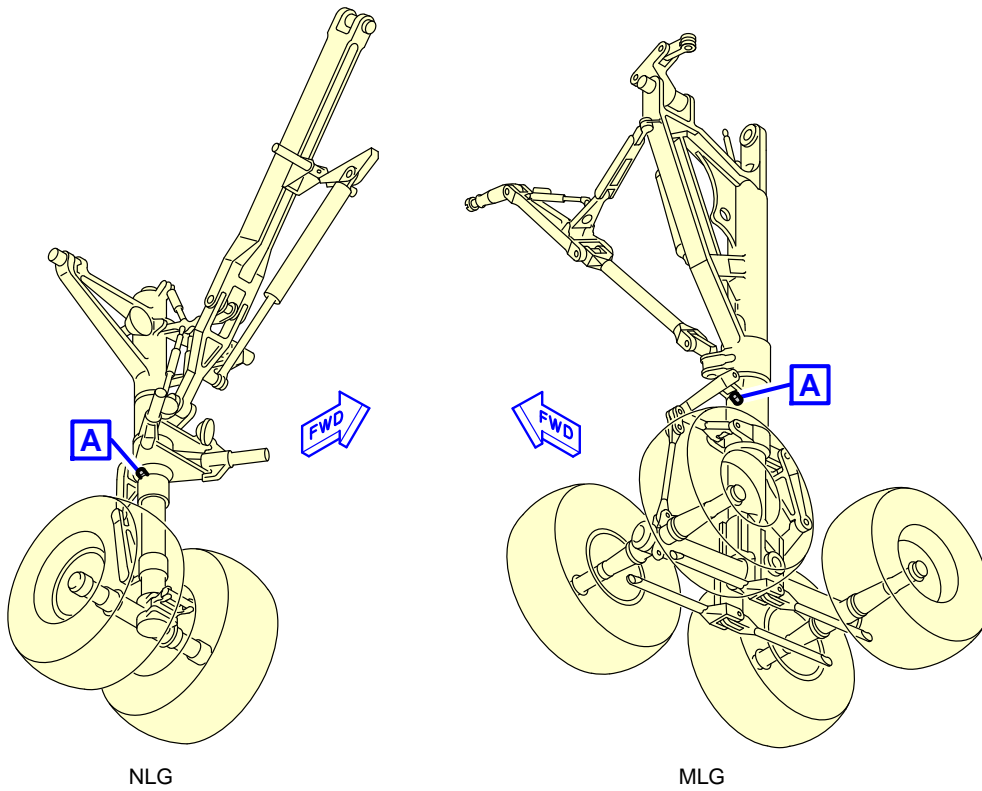

A
TYPICAL




F_AC_050402_1_0070101_01_01

Ground Service Connections
Grounding (Earthing) Points
FIGURE-5-4-2-991-007-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

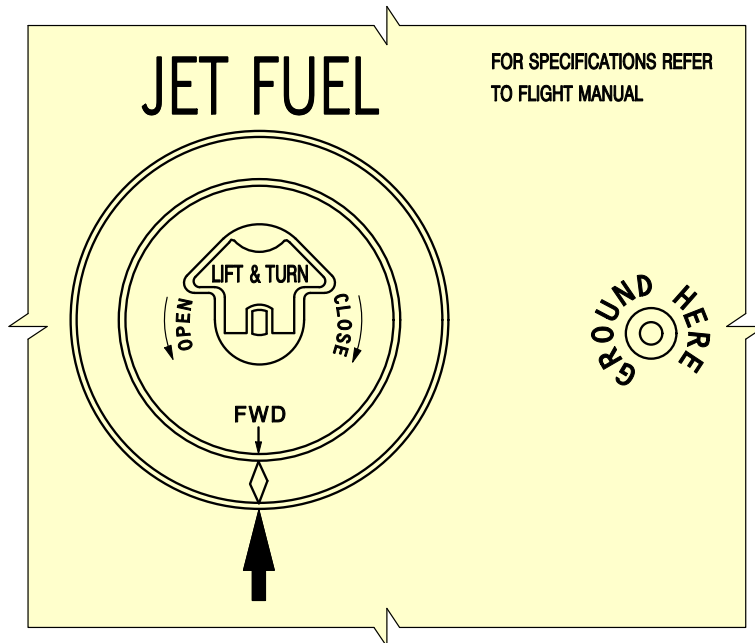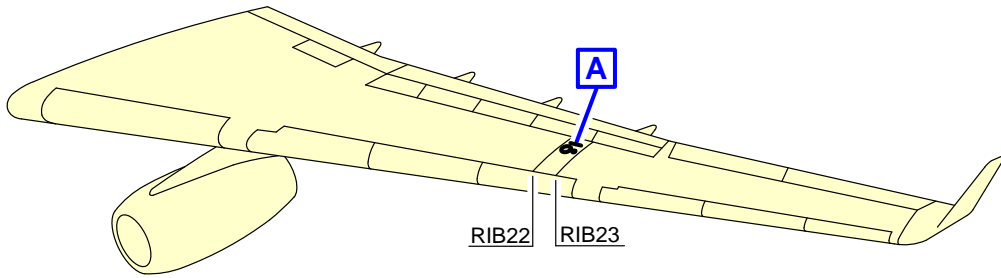

NOTE:

01 LH SHOWN RH SYMMETRICAL

F_AC_050402_1_0080101_01_00

Ground Service Connections
Grounding (Earthing) Points
FIGURE-5-4-2-991-008-A01

5-4-3 Hydraulic System

**ON A/C A330-700L

Hydraulic System

1. Ground Service Panels

NOTE : The mean height from ground in the below table may change according to the CG position and aircraft weight.

ACCESS	DISTANCE			
	AFT OF NOSE	FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND
		LH SIDE	RH SIDE	
Green system: Access door 197CB	33.10 m (108.60 ft)	1.28 m (4.20 ft)		2.23 m (7.32 ft)
Yellow system: Access door 196BB	27.30 m (89.57 ft)		1.32 m (4.33 ft)	1.95 m (6.40 ft)
Blue system: Access door 195BB	26.30 m (86.29 ft)	1.28 m (4.20 ft)		1.94 m (6.36 ft)

2. Reservoir Pressurization

NOTE : The mean height from ground in the below table may change according to the CG position and aircraft weight.

ACCESS	DISTANCE			
	AFT OF NOSE	FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND
		LH SIDE	RH SIDE	
Blue system ground service panel: Access door 195BB	26.34 m (86.42 ft)	1.28 m (4.20 ft)		1.94 m (6.36 ft)

3. Accumulator Charging

NOTE : The mean height from ground in the below table may change according to the CG position and aircraft weight.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

ACCESS	DISTANCE			MEAN HEIGHT FROM GROUND
	AFT OF NOSE	FROM AIRCRAFT CENTERLINE		
		LH SIDE	RH SIDE	
Blue system accumulator: Access door 195BB	26.34 m (86.42 ft)	1.28 m (4.20 ft)		1.94 m (6.36 ft)

4. Reservoir Filling

Two connections (one self-sealing connection for pressurized supply on the Green system ground service panel).

NOTE : The mean height from ground in the below table may change according to the CG position and aircraft weight.

ACCESS	DISTANCE			MEAN HEIGHT FROM GROUND
	AFT OF NOSE	FROM AIRCRAFT CENTERLINE		
		LH SIDE	RH SIDE	
One handpump filling connection: Access door 197CBB	33.22 m (108.99 ft)	1.28 m (4.20 ft)		2.23 m (7.32 ft)

5. A/C Emergency Generation


NOTE : The mean height from ground in the below table may change according to the CG position and aircraft weight.

ACCESS	DISTANCE			MEAN HEIGHT FROM GROUND
	AFT OF NOSE	FROM AIRCRAFT CENTERLINE		
		LH SIDE	RH SIDE	
Ram Air Turbine (RAT) safety-pin installation: Access panel 633SL	32.90 m (107.94 ft)		14.20 m (46.59 ft)	4.35 m (14.27 ft)

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

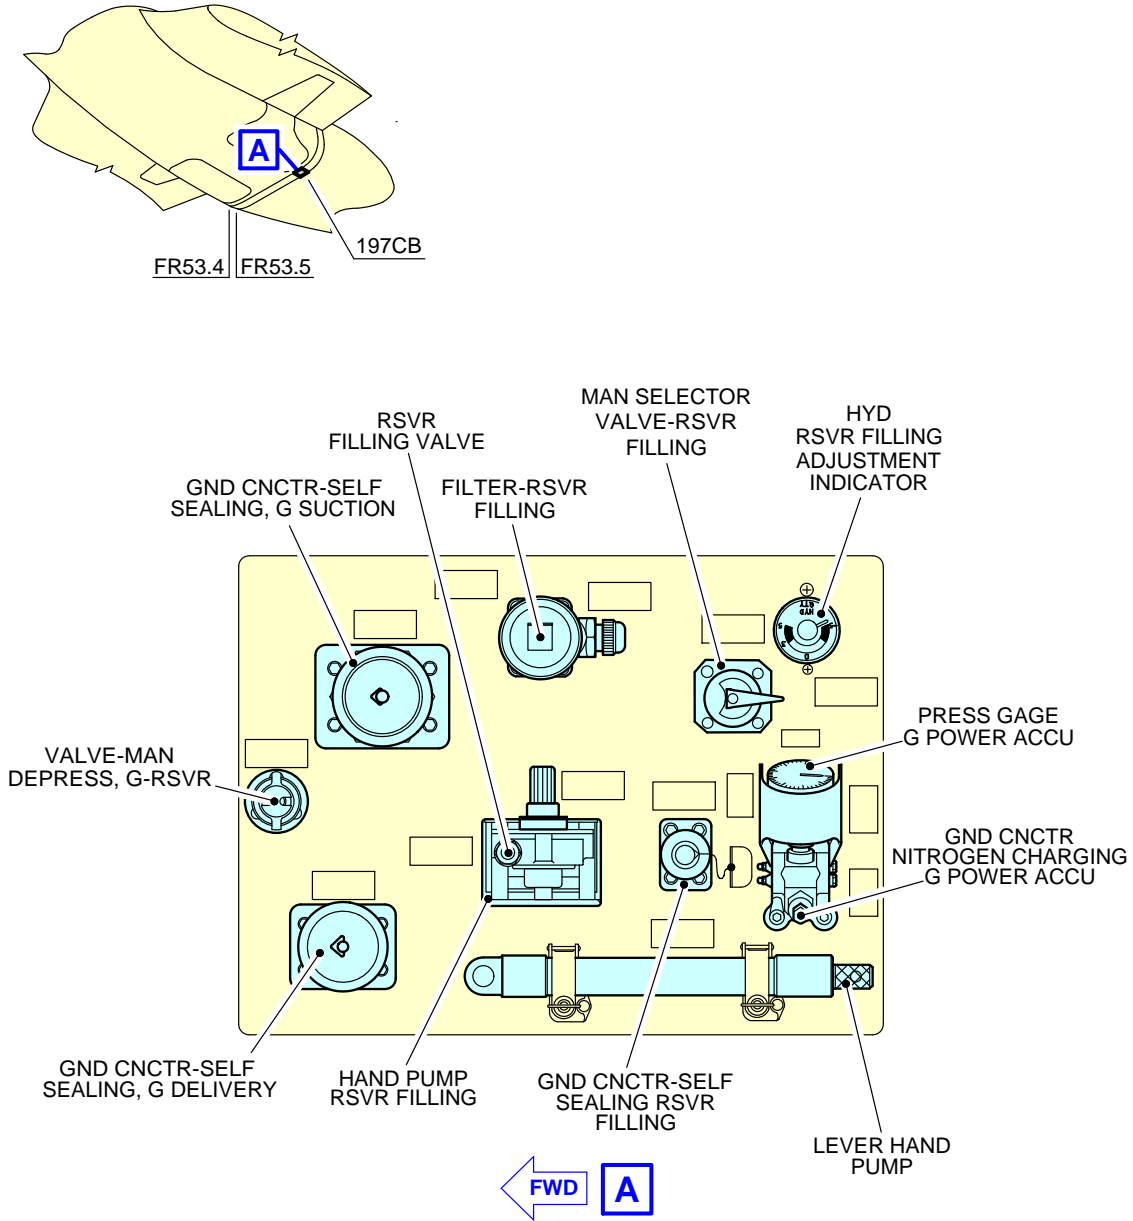


F_AC_050403_1_0130101_01_00

Ground Service Connections
Green System Ground Service Panel
FIGURE-5-4-3-991-013-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

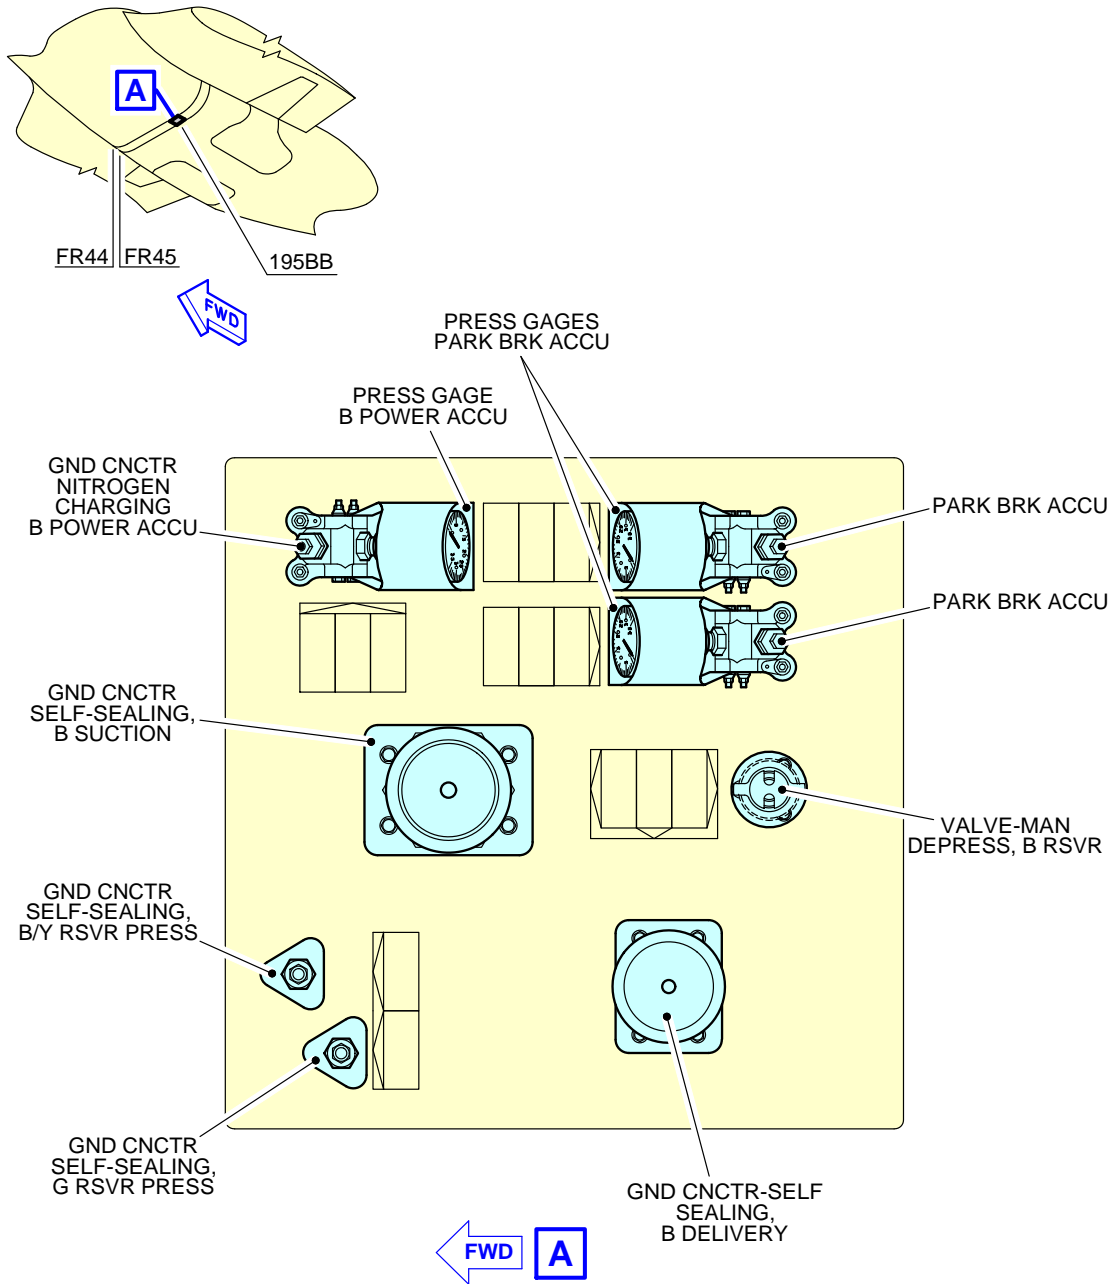


F_AC_050403_1_0140101_01_00

Ground Service Connections
Blue System Ground Service Panel
FIGURE-5-4-3-991-014-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

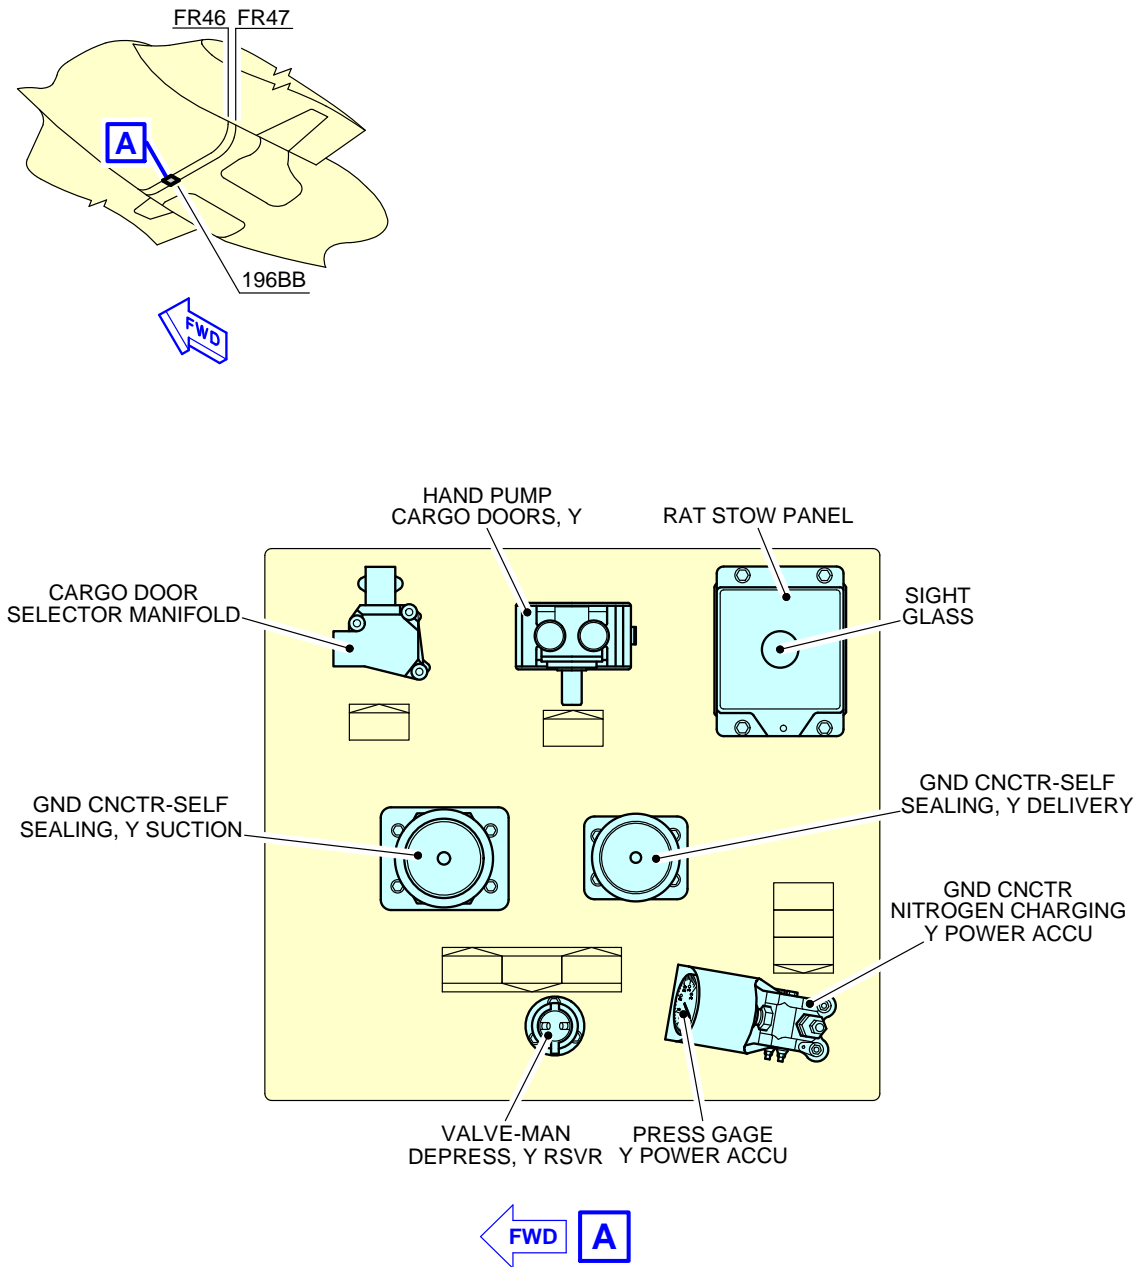


F_AC_050403_1_0150101_01_00

Ground Service Connections
Yellow System Ground Service Panel
FIGURE-5-4-3-991-015-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

**ON A/C A330-700L

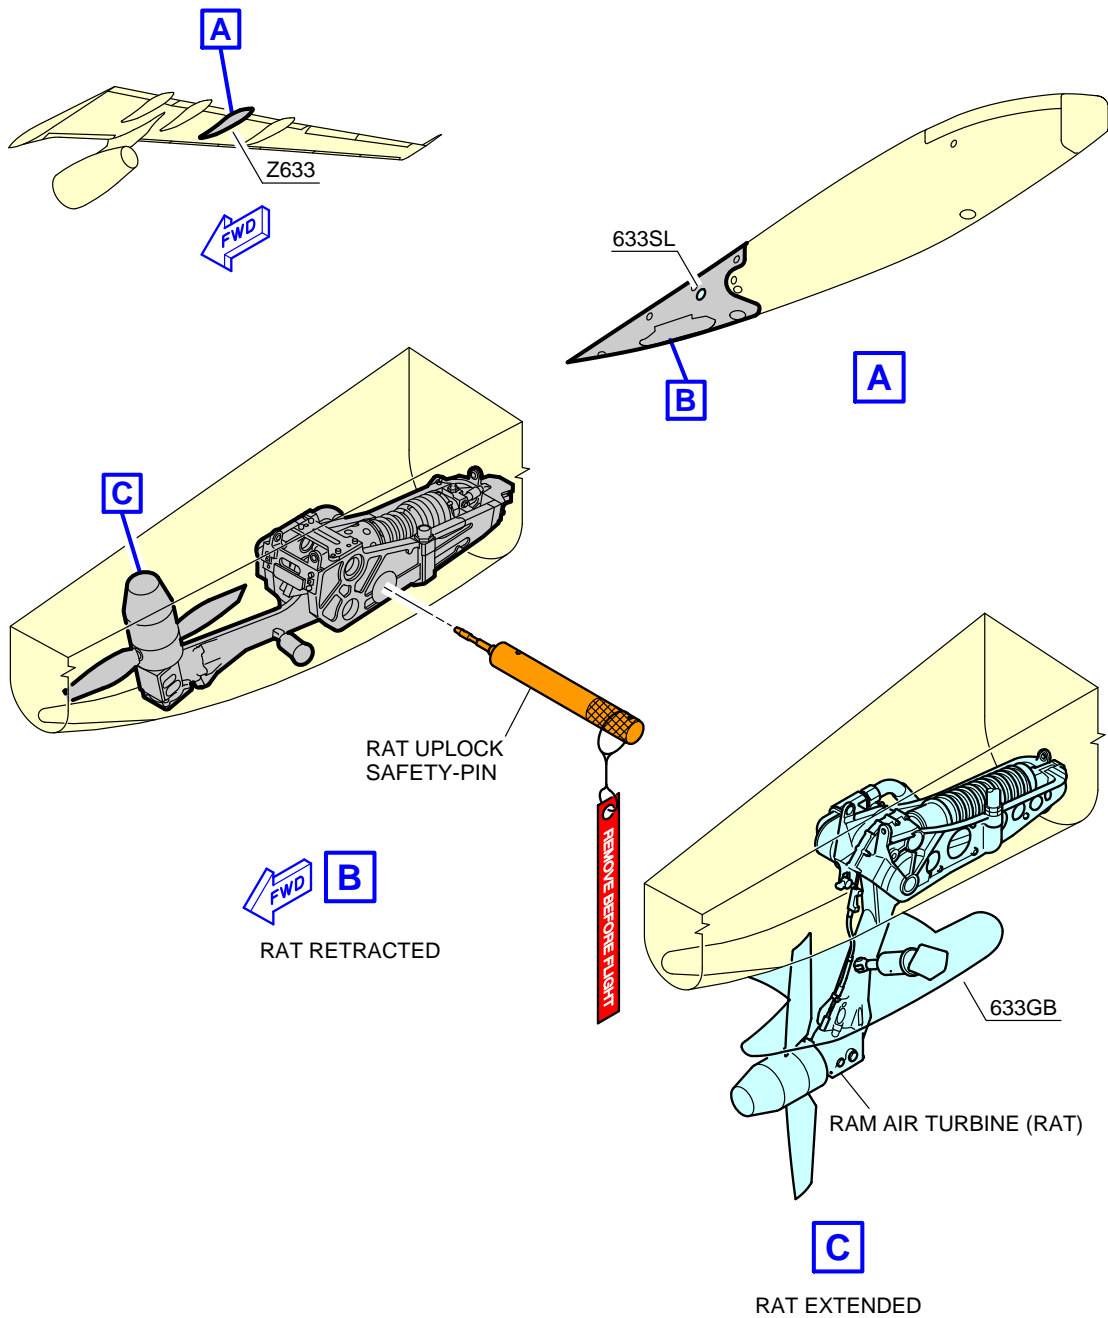

F_AC_050403_1_0160101_01_00

Ground Service Connections
RAT
FIGURE-5-4-3-991-016-A01

5-4-4 Electrical System

****ON A/C A330-700L**

Electrical Servicing

1. A/C External Power

NOTE : The mean height from ground in the below table may change according to the CG position and aircraft weight.

ACCESS	DISTANCE			
	AFT OF NOSE	FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND
		LH SIDE	RH SIDE	
A/C external power: Access door 121EL	8.70 m (28.54 ft)		0.10 m (0.33 ft)	1.95 m (6.40 ft)

NOTE : Distances are approximate.


2. Technical Specifications

- A. External power receptacles:
 - Two receptacles according to MS 90362-3 - 90 kVA.
- B. Power supply:
 - Three-phase, 115 V, 400 Hz.
- C. Electrical connectors for servicing:
 - AC outlets: HUBBELL 5258
 - DC outlets: HUBBELL 7472.
- D. Maintenance bus switch:
 - Inside A/C near bulkhead door.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

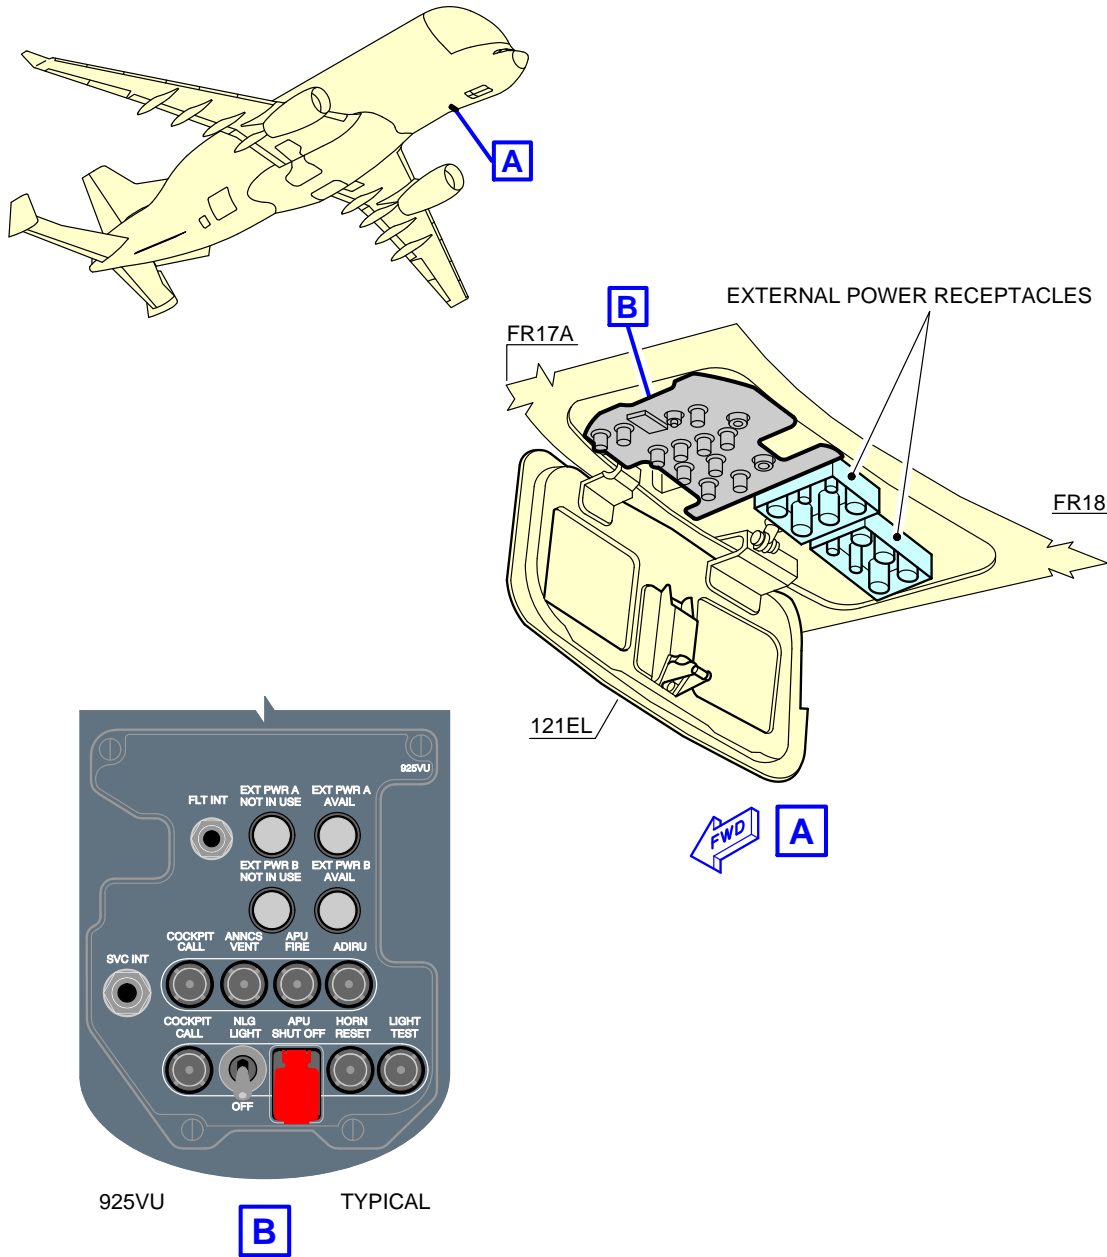



F_AC_050404_1_0070101_01_01

Ground Service Connections
Electrical Service Panel
FIGURE-5-4-4-991-007-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

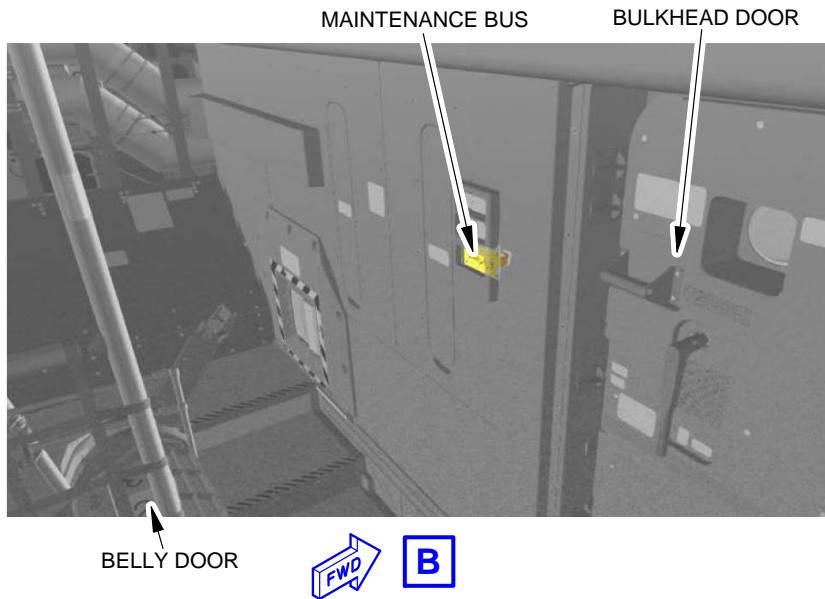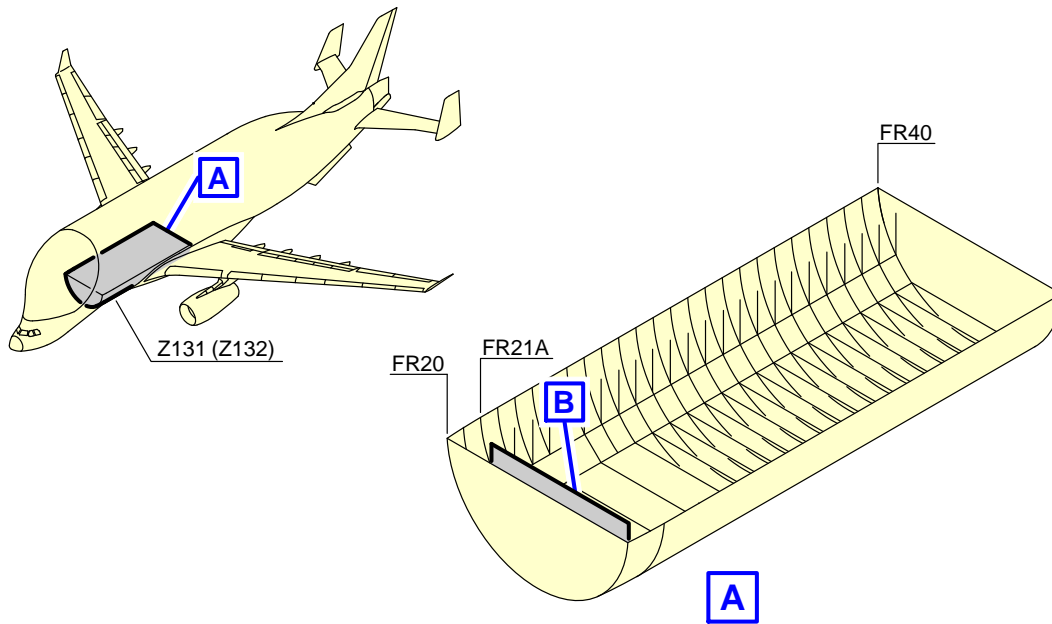

F_AC_050404_1_0080101_01_00

Ground Service Connections
Maintenance Bus-Switch Location
FIGURE-5-4-4-991-008-A01

5-4-5 Oxygen System

****ON A/C A330-700L**

Oxygen System

1. Oxygen Servicing

NOTE : The mean height from ground in the below table may change according to the CG position and aircraft weight.


ACCESS	DISTANCE			MEAN HEIGHT FROM GROUND
	AFT OF NOSE	FROM AIRCRAFT CENTERLINE		
		LH SIDE	RH SIDE	
Oxygen replenishment (option 1): 5750HT	12.54 m (41.14 ft)	0.44 m (1.44 ft)		3.46 m (11.35 ft)
Oxygen replenishment (option 2): 5751HT	12.54 m (41.14 ft)		0.44 m (1.44 ft)	3.46 m (11.35 ft)

NOTE : Internal charging connection near the belly door, inside aircraft.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

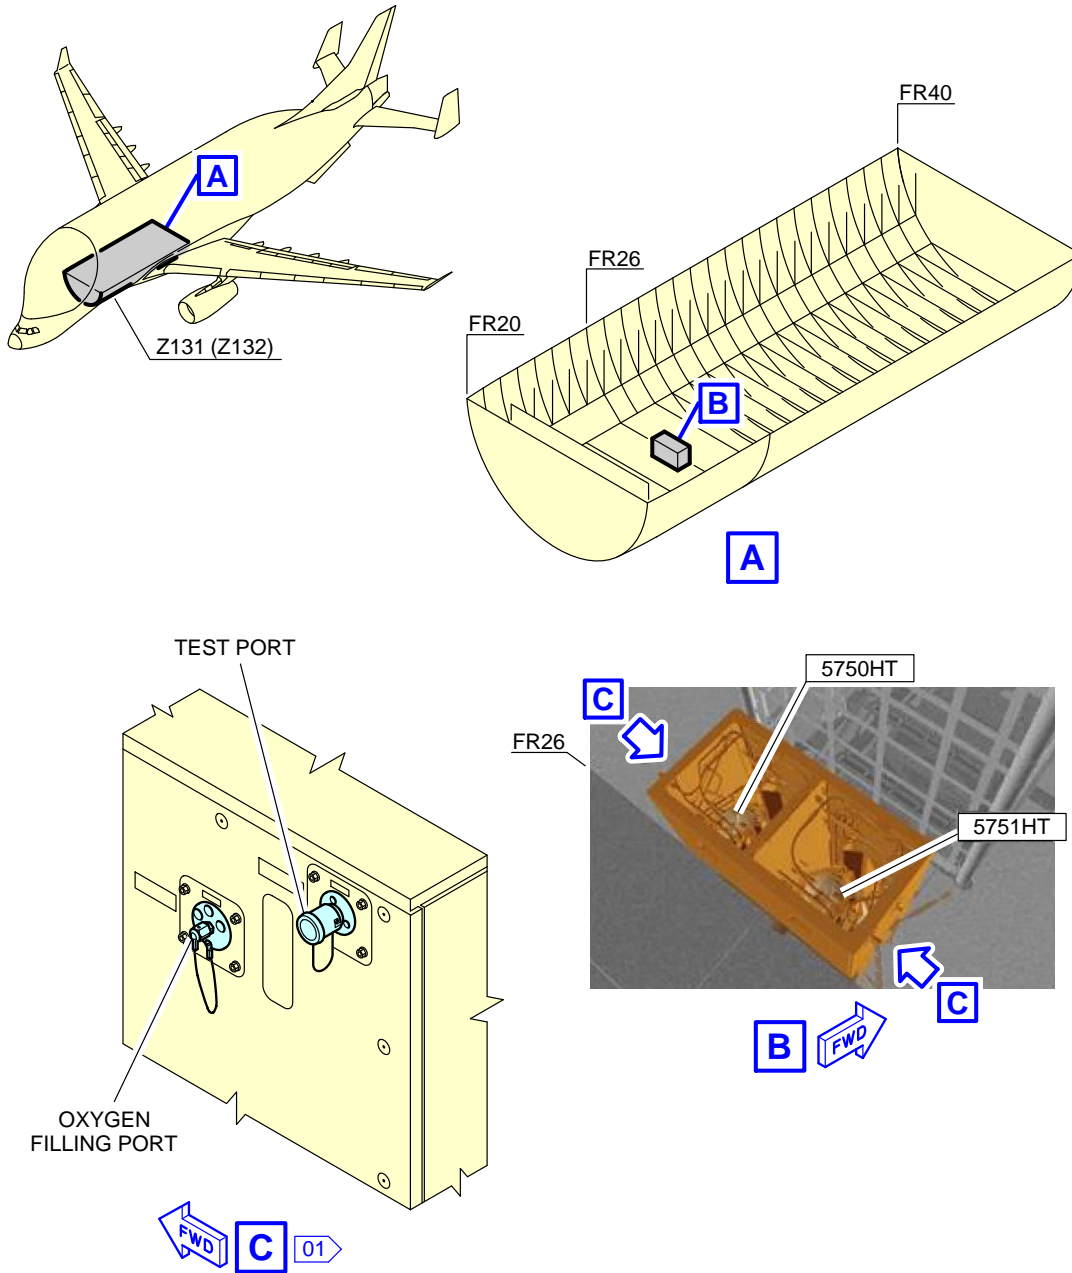

NOTE:

01 LH SHOWN, RH SYMMETRICAL

F_AC_050405_1_0050101_01_00

Ground Service Connections
Oxygen Servicing
FIGURE-5-4-5-991-005-A01

5-4-6 Fuel System

**ON A/C A330-700L

Fuel System

1. Refuel/Defuel Control Panel

NOTE : The mean height from ground in the below table may change according to the CG position and aircraft weight.

ACCESS	DISTANCE			
	AFT OF NOSE	FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND
		LH SIDE	RH SIDE	
Refuel/Defuel control panel: Access door 198DB	32.6 m (106.96 ft)		0.8 m (2.62 ft)	1.9 m (6.23 ft)

- A. Flow rate: 1 580 l/min (417 US gal/min) per connection.
- B. Maximum pressure: 50 psi (3.45 bar).

2. Refuel/Defuel Connectors

NOTE : The mean height from ground in the below table may change according to the CG position and aircraft weight.

ACCESS	DISTANCE			
	AFT OF NOSE	FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND
		LH SIDE	RH SIDE	
Refuel/Defuel coupling, right: Access door 622HB	28.3 m (92.85 ft)		12.6 m (41.34 ft)	5.1 m (16.73 ft)
Overwing gravity refuel cap	32.8 m (107.61 ft)	17.2 m (56.43 ft)	17.2 m (56.43 ft)	6.1 m (20.01 ft)

- A. Four standard 2.5 in. ISO 45 connections.
- B. Two service connections (gravity refuel).

3. Overpressure Protector and NACA Flame Arrestor

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING



NOTE : The mean height from ground in the below table may change according to the CG position and aircraft weight.

ACCESS	DISTANCE			
	AFT OF NOSE	FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND
		LH SIDE	RH SIDE	
Overpressure protector (wing): Access panel 550EB (650EB)	37.8 m (124.02 ft)	27.17 m (89.14 ft)	27.17 m (89.14 ft)	5.75 m (18.86 ft)
NACA flame arrestor (wing): Access panel 550DB (650DB)	37.4 m (122.70 ft)	26.53 m (87.04 ft)	26.53 m (87.04 ft)	5.7 m (18.70 ft)

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

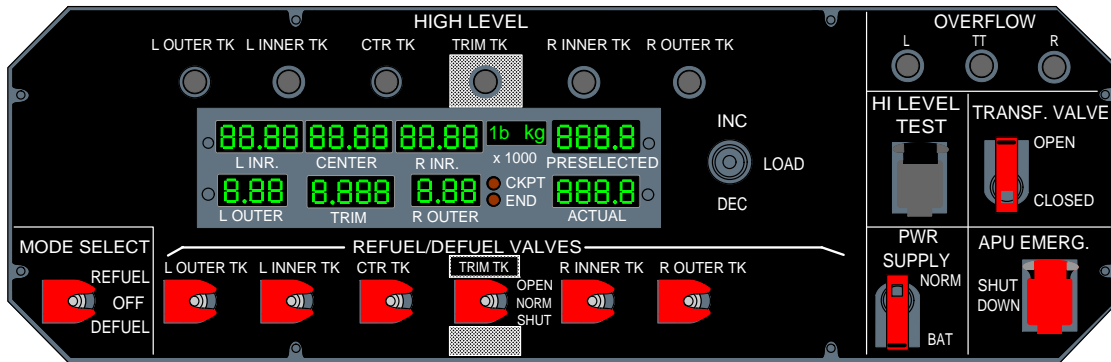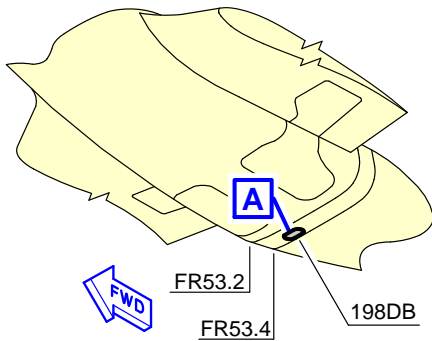

A


F_AC_050406_1_0210101_01_00

Ground Service Connections
 Refuel/Defuel Control Panel
 FIGURE-5-4-6-991-021-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

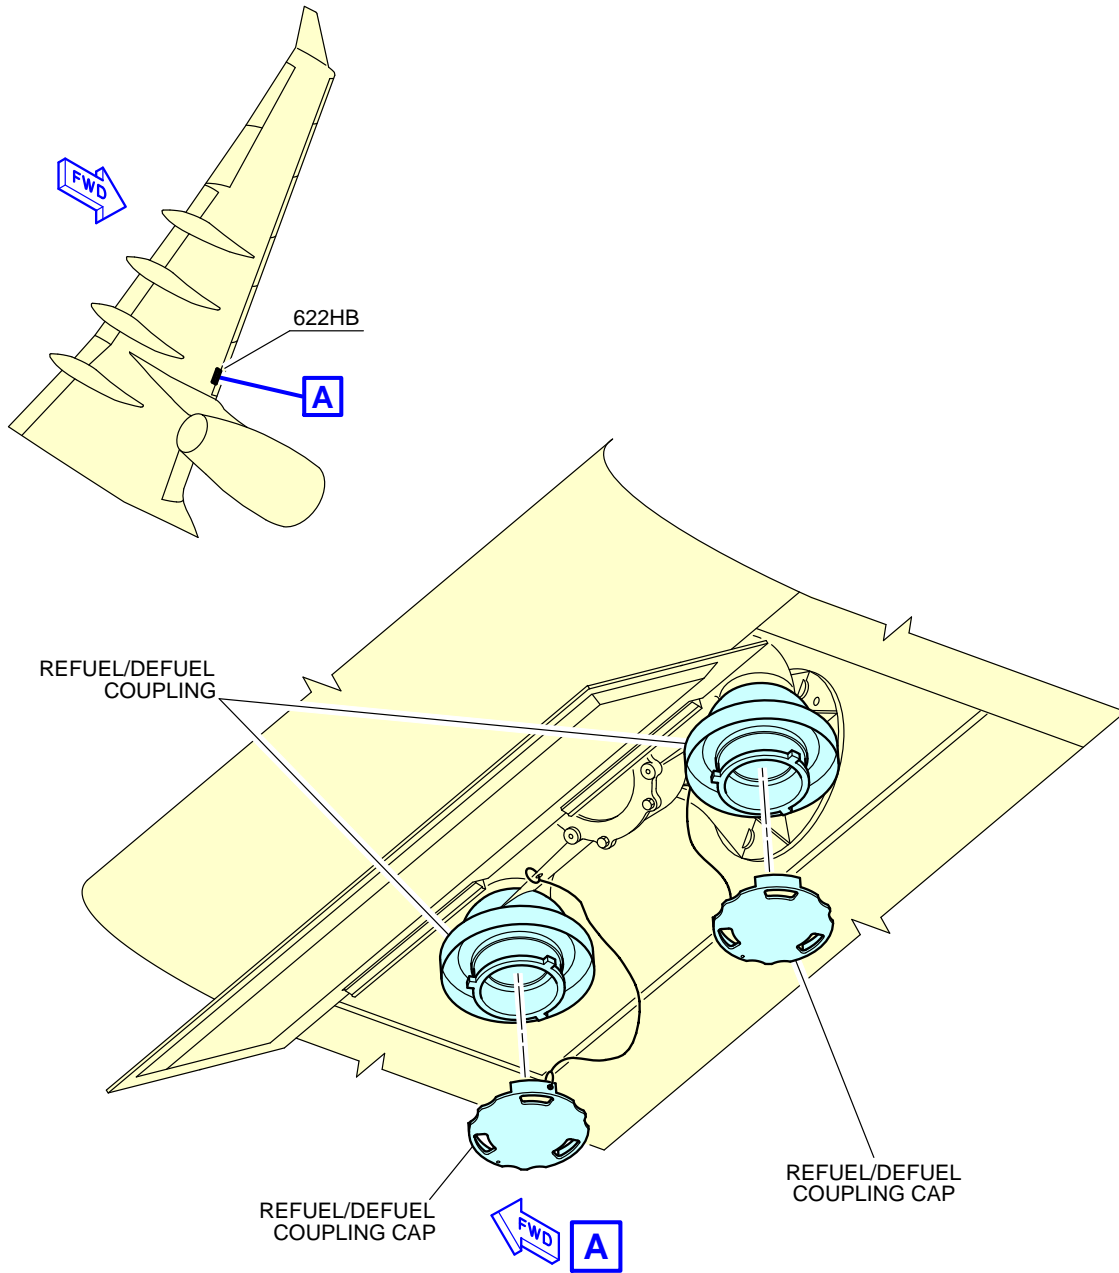


F_AC_050406_1_0220101_01_00

Ground Service Connections
Refuel/Defuel Coupling
FIGURE-5-4-6-991-022-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

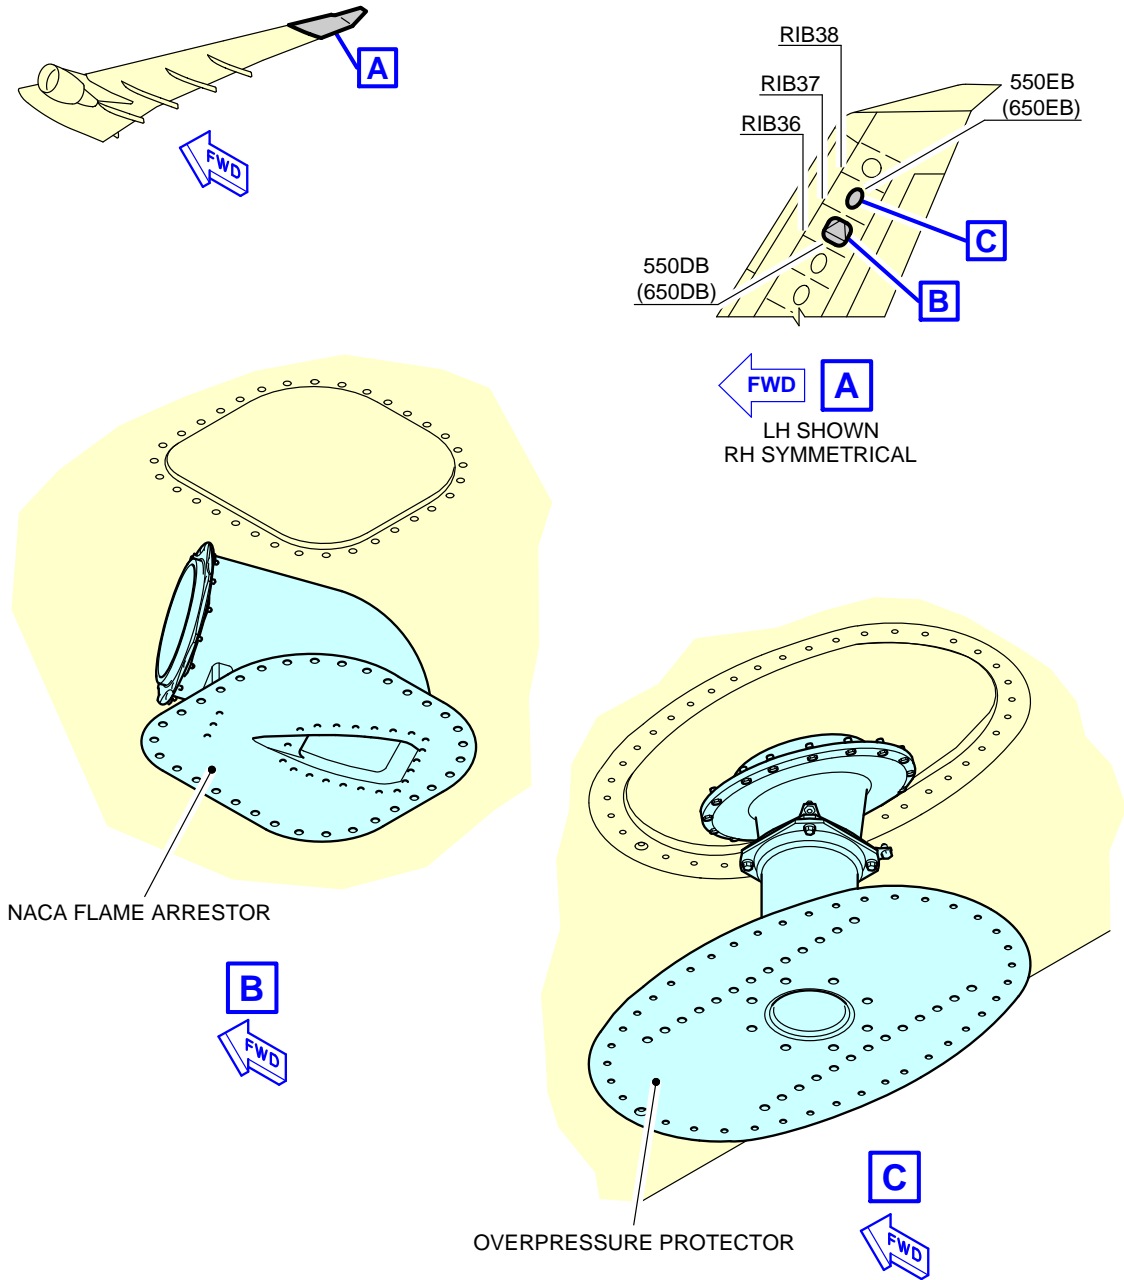

F_AC_050406_1_0230101_01_00

Ground Service Connections
Overpressure Protector and NACA Flame Arrestor - Wing
FIGURE-5-4-6-991-023-A01

5-4-7 Pneumatic System

****ON A/C A330-700L**

Pneumatic System

1. High Pressure Air Connection

NOTE : The mean height from ground in the below table may change according to the CG position and aircraft weight.

ACCESS	DISTANCE			
	AFT OF NOSE	FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND
		LH SIDE	RH SIDE	
HP connectors: Access door 193CB	20.94 m (68.70 ft)	0.84 m (2.76 ft)		1.79 m (5.87 ft)

- A. Connectors:
 - Two standard 3 in. ISO 2026 connections.

2. Low Pressure Air Connection

NOTE : The mean height from ground in the below table may change according to the CG position and aircraft weight.


ACCESS	DISTANCE			
	AFT OF NOSE	FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND
		LH SIDE	RH SIDE	
LP connectors: Access door 191EB	22.66 m (74.34 ft)	0.4 m (1.31 ft)		8 m (26.25 ft)

- A. Connectors:
 - Two standard 8 in. SAE AS4262 connections.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

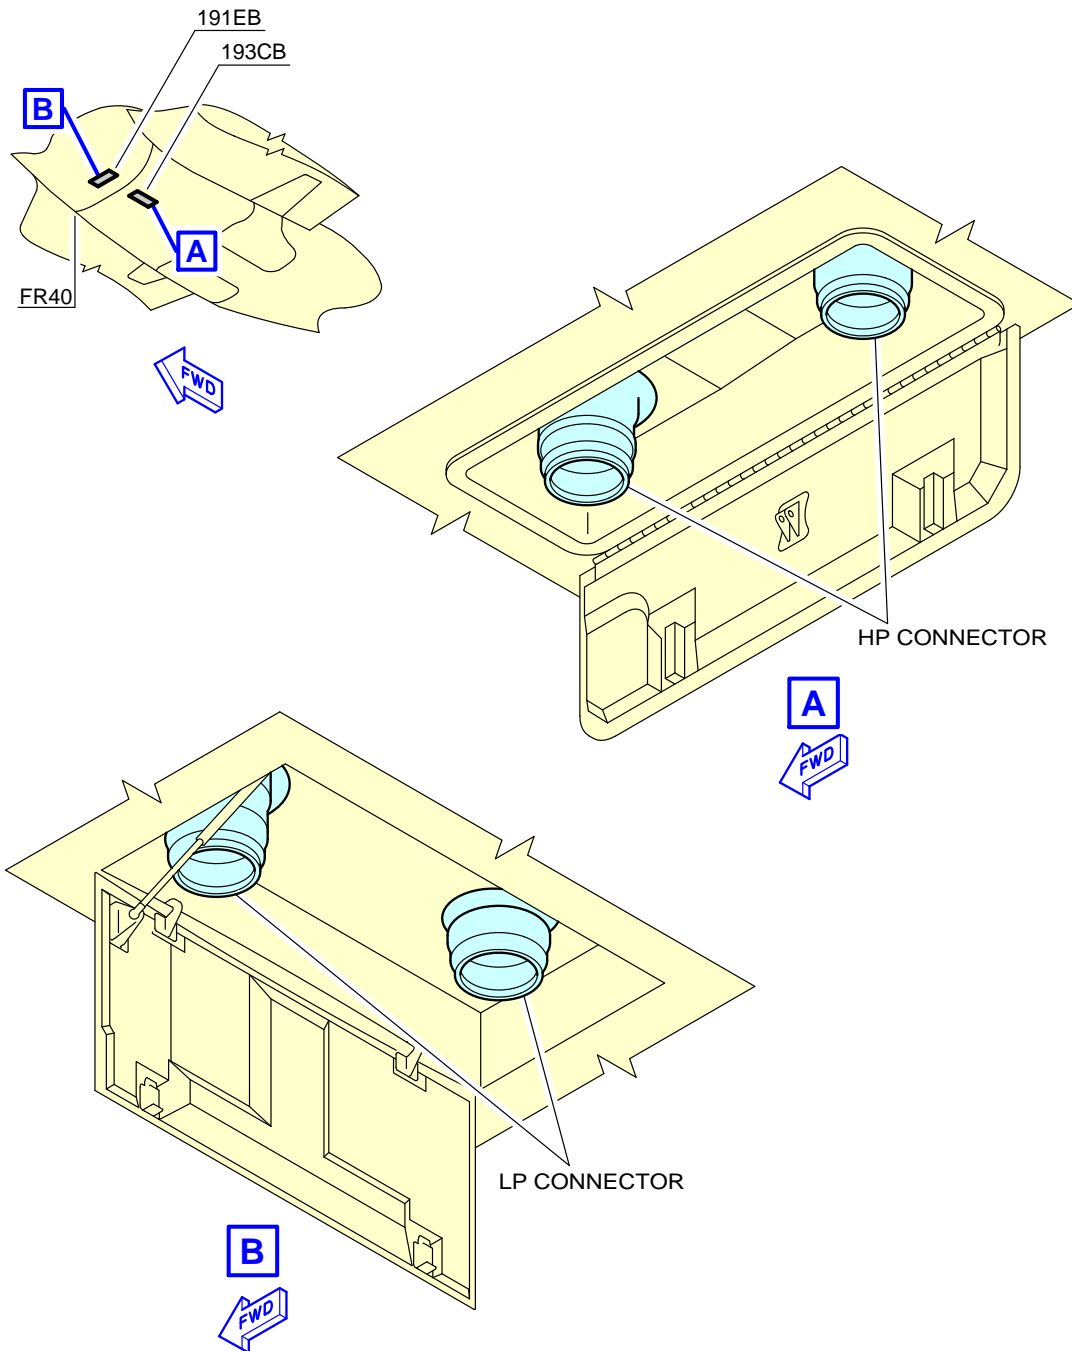

F_AC_050407_1_0040101_01_00

Ground Service Connections
LP and HP Ground Connectors
FIGURE-5-4-7-991-004-A01

5-4-8 Oil System

**ON A/C A330-700L

Oil System

1. RR Trent 700 Series Engine

A. Engine Oil Replenishment:

One gravity filling cap.

One ozone self-sealing pressure fill and overfill connector per engine.

NOTE : The mean height from ground in the below table may change according to the CG position and aircraft weight.

ACCESS	DISTANCE			MEAN HEIGHT FROM GROUND
	AFT OF NOSE	FROM AIRCRAFT CENTERLINE		
		LH SIDE	RH SIDE	
Engine 1: Access door 416CR	25.40 m (83.33 ft)	7.92 m (25.98 ft)		2.05 m (6.73 ft)
Engine 2: Access door 426CR	25.40 m (83.33 ft)		10.82 m (35.50 ft)	2.05 m (6.73 ft)

(1) Tank capacity:

- Full level: 23.30 l (6.16 US gal).
- Usable: 22.71 l (6.00 US gal).

B. IDG Oil Replenishment:

One ozone self-sealing pressure fill and overfill connector per engine.

NOTE : The mean height from ground in the below table may change according to the CG position and aircraft weight.

ACCESS	DISTANCE			MEAN HEIGHT FROM GROUND
	AFT OF NOSE	FROM AIRCRAFT CENTERLINE		
		LH SIDE	RH SIDE	
Engine 1: Access door 415CL	25.9 m (84.97 ft)	9.65 m (31.66 ft)		0.80 m (2.62 ft)
Engine 2: Access door 425CL	25.9 m (84.97 ft)		9.09 m (29.82 ft)	0.80 m (2.62 ft)

(1) Max delivery pressure required: 2.76 bar (40 psi).

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

(2) Max oil capacity of the IDG: 5.50 l (1.45 Us gal).

- C. Starter Oil Replenishment:
One filling connection per engine.

NOTE : The mean height from ground in the below table may change according to the CG position and aircraft weight.


ACCESS	DISTANCE			MEAN HEIGHT FROM GROUND
	AFT OF NOSE	FROM AIRCRAFT CENTERLINE		
		LH SIDE	RH SIDE	
Engine 1: Access door 415AL (416AR)	25.9 m (84.97 ft)	9.65 m (31.66 ft)		0.80 m (2.62 ft)
Engine 2: Access door 425AL (426AR)	25.9 m (84.97 ft)		9.09 m (29.82 ft)	0.80 m (2.62 ft)

- Max oil capacity of the starter: 0.50 l (0.13 US gal).

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

**ON A/C A330-700L

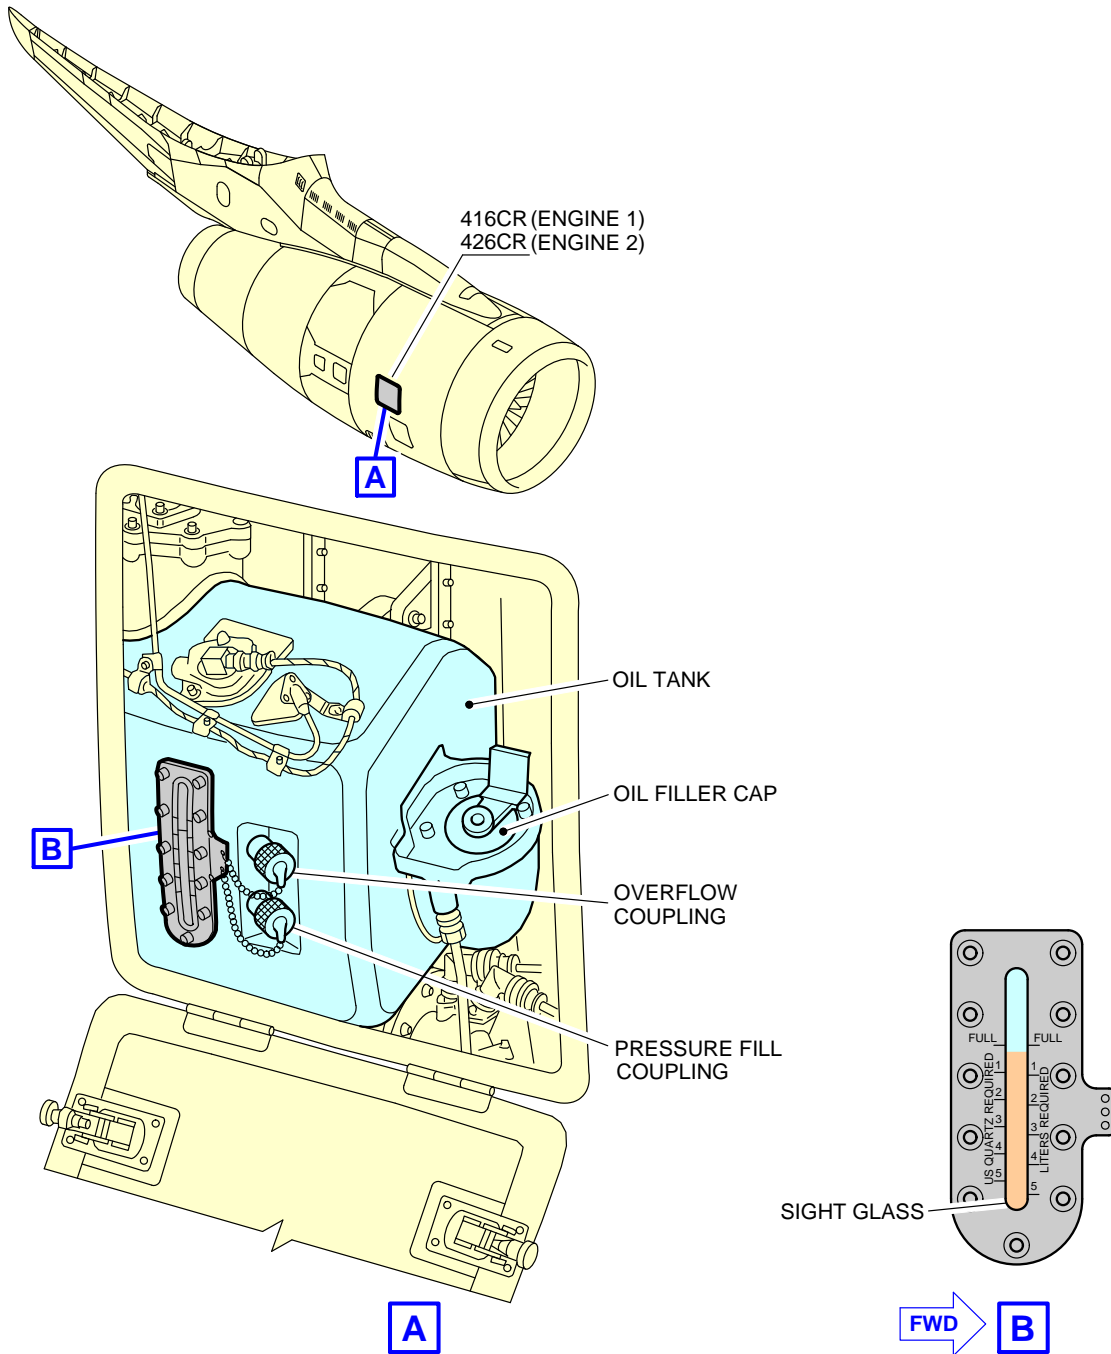


F_AC_050408_1_0280101_01_00

Ground Service Connections
Engine Oil Tank - RR Trent 700 Series Engine
FIGURE-5-4-8-991-028-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

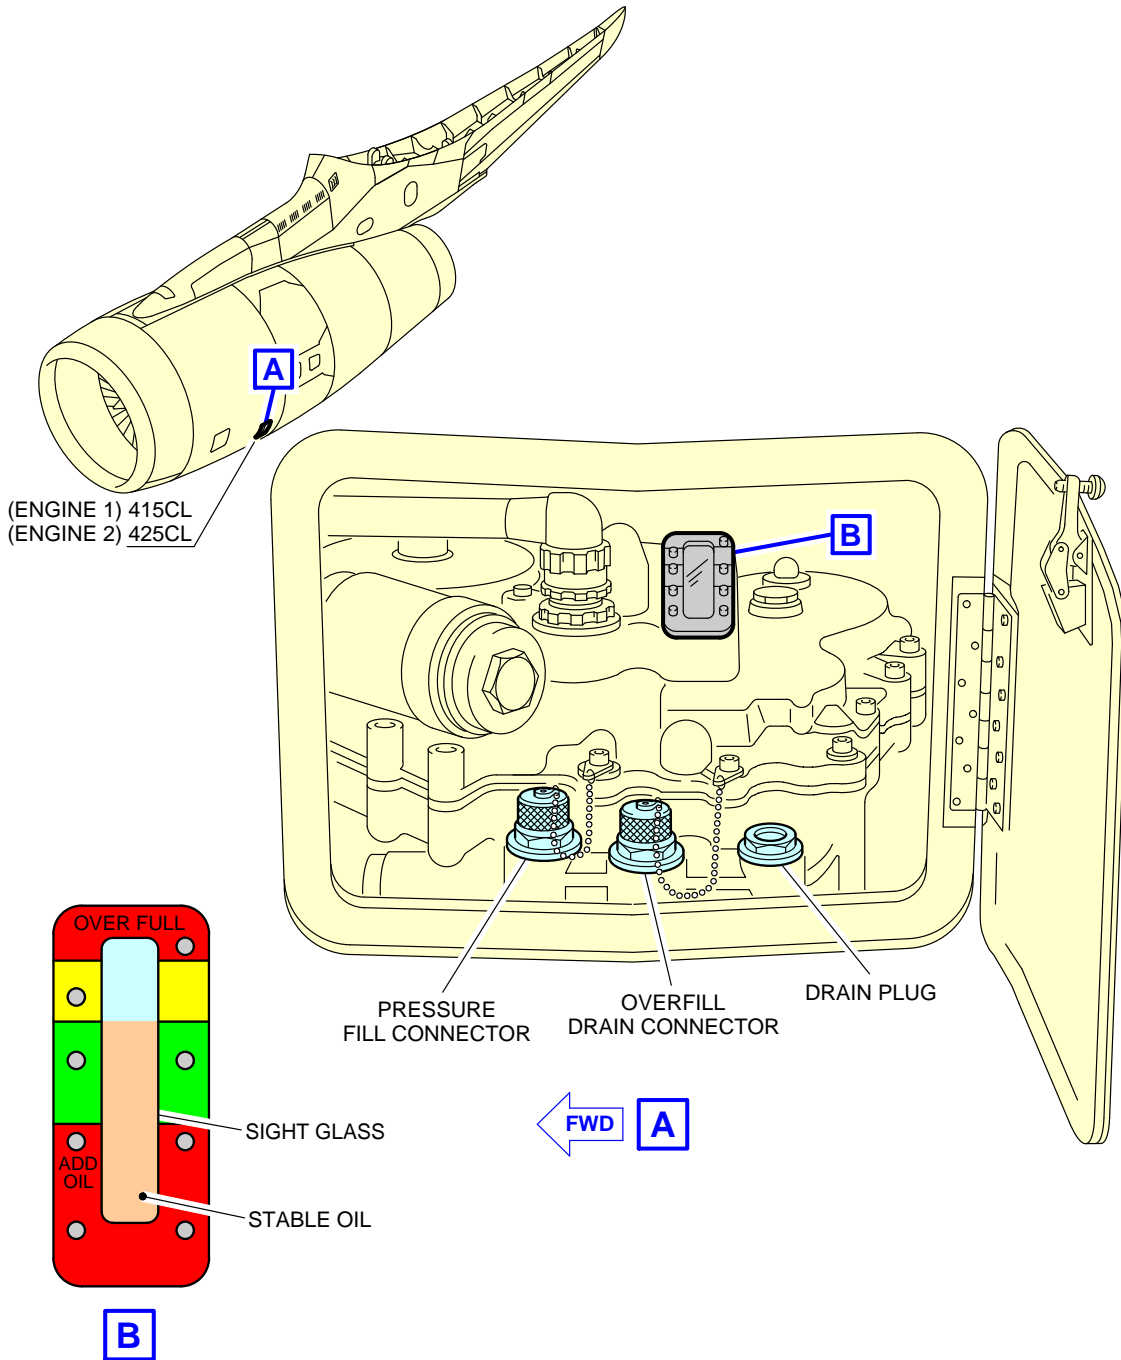


F_AC_050408_1_0290101_01_00

Ground Service Connections
IDG Oil Tank - RR Trent 700 Series Engine
FIGURE-5-4-8-991-029-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

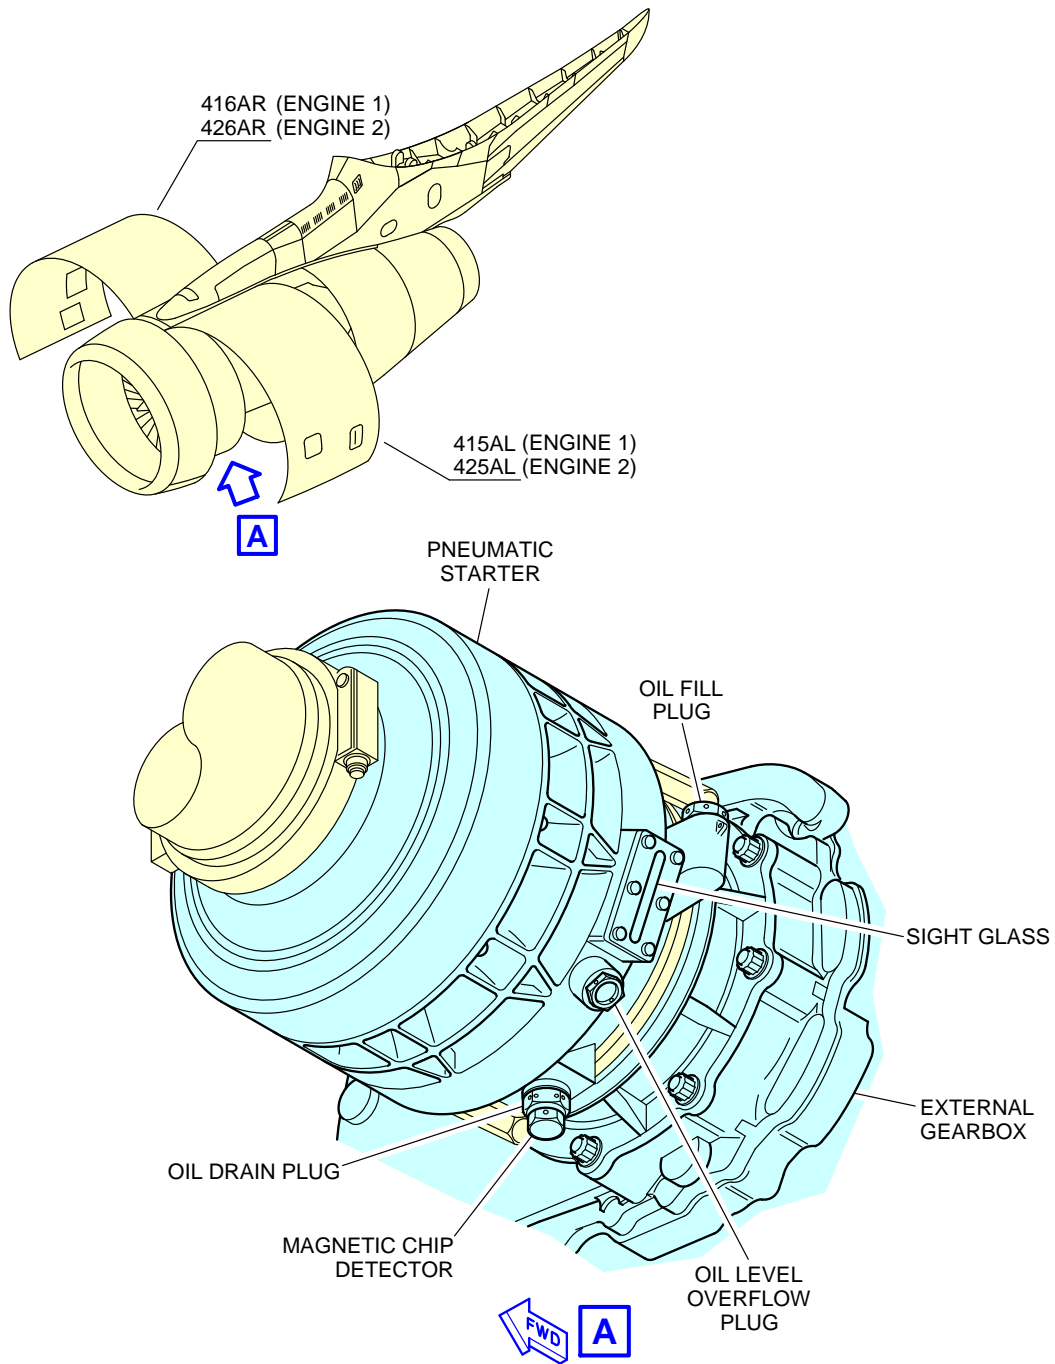

F_AC_050408_1_0300101_01_00

Ground Service Connections
Starter Oil Tank - RR Trent 700 Series Engine
FIGURE-5-4-8-991-030-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

APU Oil Servicing

1. APU Oil Servicing:

APU oil gravity filling cap.


NOTE : The mean height from ground in the below table may change according to the CG position and aircraft weight.

ACCESS	DISTANCE			MEAN HEIGHT FROM GROUND
	AFT OF NOSE	FROM AIRCRAFT CENTERLINE		
		LH SIDE	RH SIDE	
APU oil replenishment: Access doors 315AL and 316AR	58.94 m (193.37 ft)	0.4 m (1.31 ft)		8 m (26.25 ft)

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

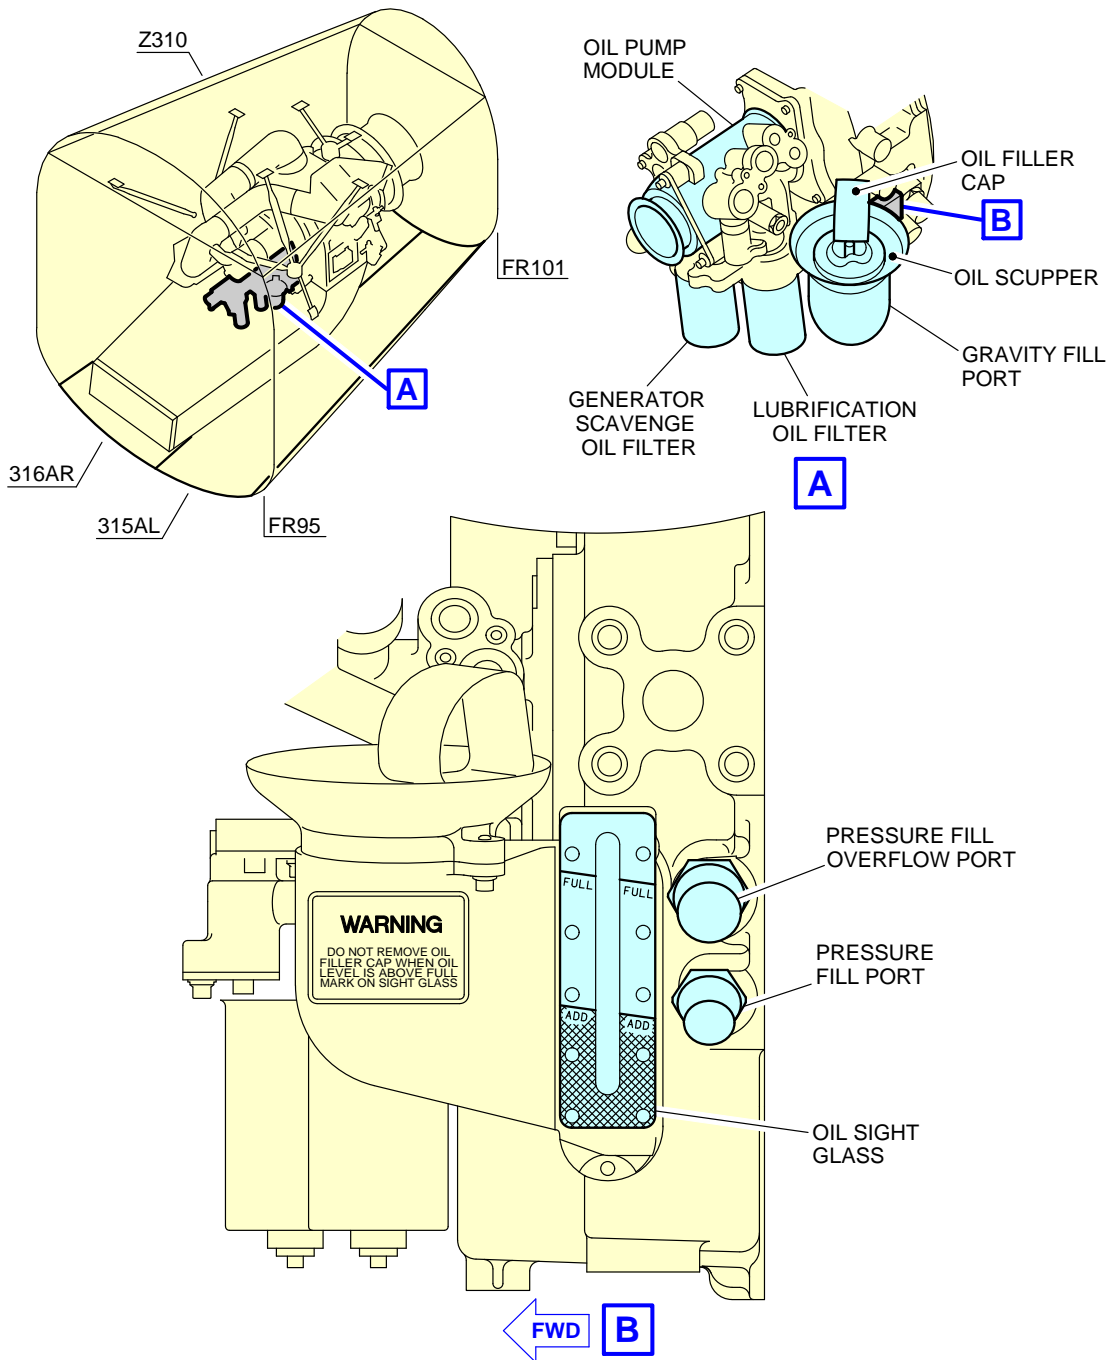

F_AC_050408_1_0310101_01_00

Ground Service Connections
APU Oil Servicing
FIGURE-5-4-8-991-031-A01

5-4-10 Waste Water System

**ON A/C A330-700L

Waste Water System

1. Waste Water Servicing

A. There are two waste-water ground-service panels:

- First panel: One standard connection Roylyn 1 in. (ISO 17775) for flushing and filling
- Second panel: One standard Taco type valve 4 in. (ISO 17775) for draining.

NOTE : Handle used for drainage is located on the first panel.

B. Capacity waste tanks:

- Standard: 35 l (9.25 US gal).

NOTE : The waste water drain-system discards the waste water from the galley sink and the lavatory washbasin overboard.

The toilet system moves the waste materials and liquids from the toilet to the waste tank.

C. Chemical fluid:

- Standard: 9.5 l (2.51 US gal).


NOTE : The mean height from ground in the below table may change according to the CG position and aircraft weight.

ACCESS	DISTANCE			MEAN HEIGHT FROM GROUND
	AFT OF NOSE	FROM AIRCRAFT CENTERLINE		
		LH SIDE	RH SIDE	
Waste-water ground-service-panel 1: Access door 121GL	6.39 m (20.96 ft)	2.03 m (6.66 ft)		2.16 m (7.09 ft)
Waste-water ground-service-panel 2: Access door 121FL	7.13 m (23.39 ft)	1.91 m (6.27 ft)		2.19 m (7.19 ft)

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

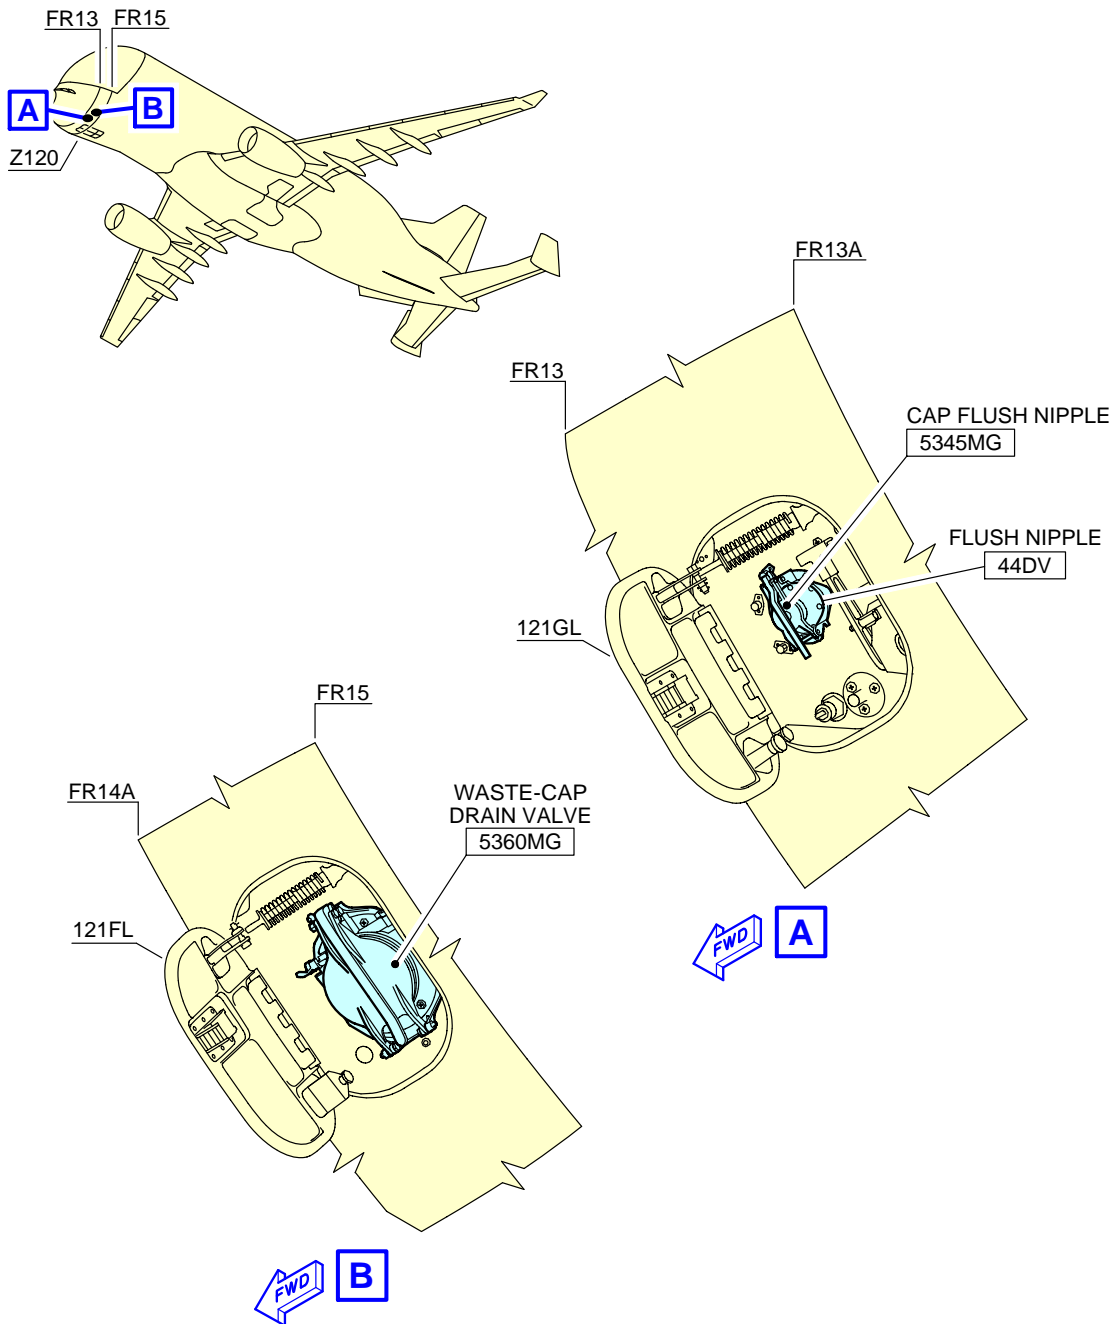

F_AC_050410_1_0080101_01_01

Ground Service Connections
Waste-Water Ground-Service Panels
FIGURE-5-4-10-991-008-A01

5-4-11 Cargo Control Panels****ON A/C A330-700L**Cargo Control Panels

1. Cargo Control Panels


NOTE : The mean height from ground in the below table may change according to the CG position and aircraft weight.

ACCESS	DISTANCE			
	AFT OF NOSE	FROM AIRCRAFT CENTERLINE		MEAN HEIGHT FROM GROUND
		LH SIDE	RH SIDE	
AFT cargo door panel: Access door 152NR	40.73 m (133.6 ft)		2.68 m (8.8 ft)	4.41 m (14.5 ft)
Main Deck Cargo Door (MDCD) inner operation panel	9.26 m (30.4 ft)		3.23 m (10.6 ft)	6.09 m (20.0 ft)
MDCD outer operation panel	10.25 m (33.6 ft)		3.55 m (11.6 ft)	6.26 m (20.5 ft)

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

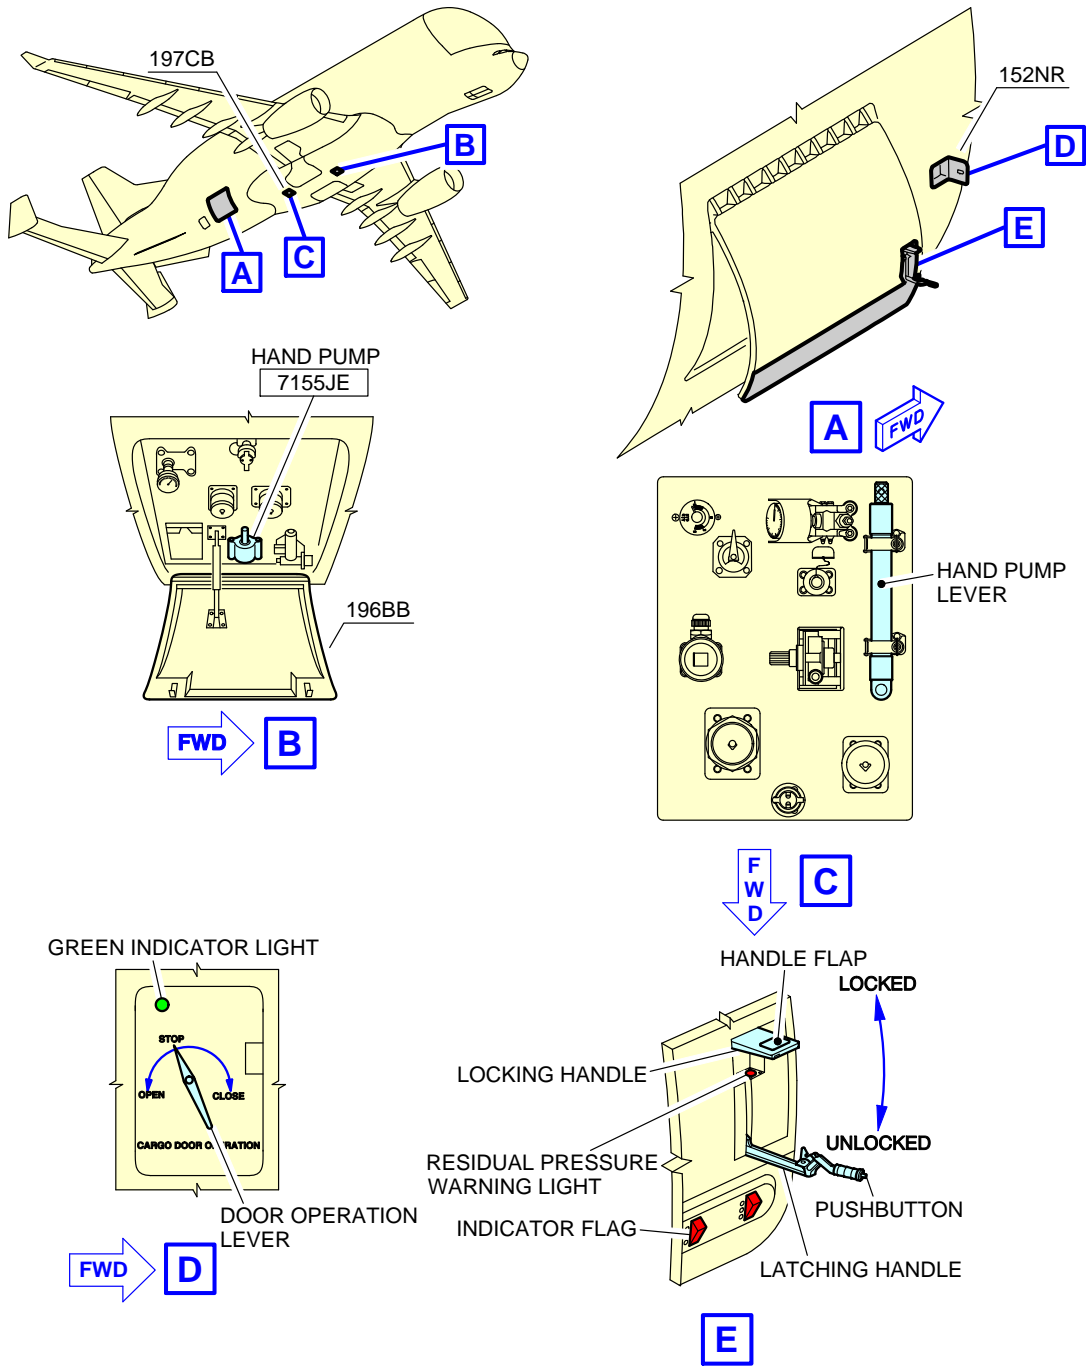



F_AC_050411_1_0080101_01_00

Lower Cargo Door Operation Panel
FIGURE-5-4-11-991-008-A01

A330-700L


AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

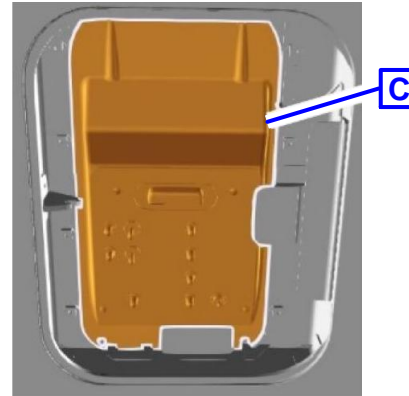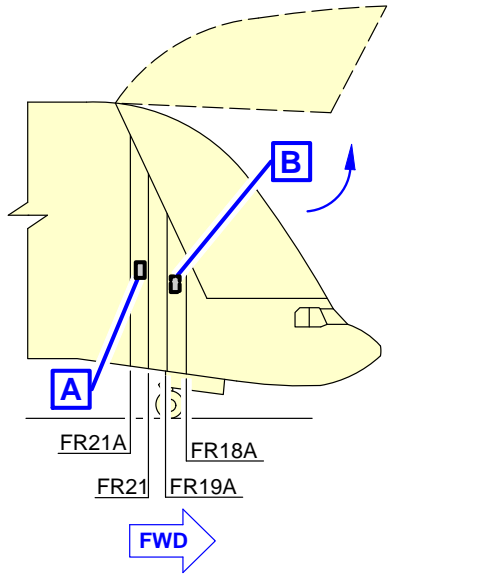

A

MDCD OUTER OPERATION PANEL

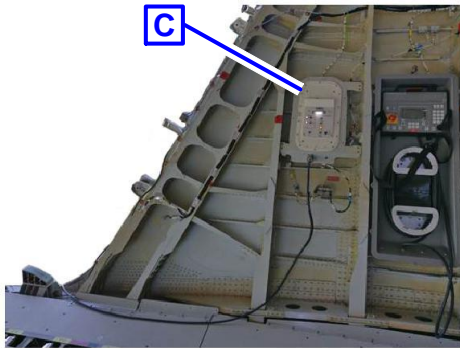

B

MDCD INNER OPERATION PANEL



"FAULT" WARNING LIGHT

"OPEN/CLOSE" TOGGLE SWITCH

"FULLY OPEN" LIGHT

C

TYPICAL MDCD OPERATION PANEL

F_AC_050411_1_0090101_01_00

MDCD Control Panel
FIGURE-5-4-11-991-009-A01

5-5-0 Engine Starting Pneumatic Requirements

****ON A/C A330-700L**


Engine Starting Pneumatic Requirements

1. The purpose of this section is to give the minimum air data requirements at the aircraft connection, needed to start the engine within no more than 90 seconds, at sea level (0 feet), for a set of Outside Air Temperatures (OAT).

ABBREVIATION	DEFINITION
A/C	Aircraft
ASU	Air Start Unit
HPGC	High Pressure Ground Connection
OAT	Outside Air Temperature

- A. Air data (discharge temperature, absolute discharge pressure) are given at the HPGC.
- B. For the requirements below, the configuration with two HPGC is used. Using one connector only (for a given mass flow rate and discharge pressure from the ASU) will increase the pressure loss in the ducts of the bleed system and therefore lower the performances at the engine starter.
- C. For a given OAT the following charts are used to determine an acceptable combination for air discharge temperature, absolute discharge pressure and mass flow rate.
- D. This section is addressing requirements for the ASU only, and is not representative of the start performance of the aircraft using the APU or engine cross bleed procedure.
- E. To protect the A/C, the charts feature, if necessary:
 - The maximum discharge pressure at the HPGC
 - The maximum discharge temperature at the HPGC.

**ON A/C A330-700L

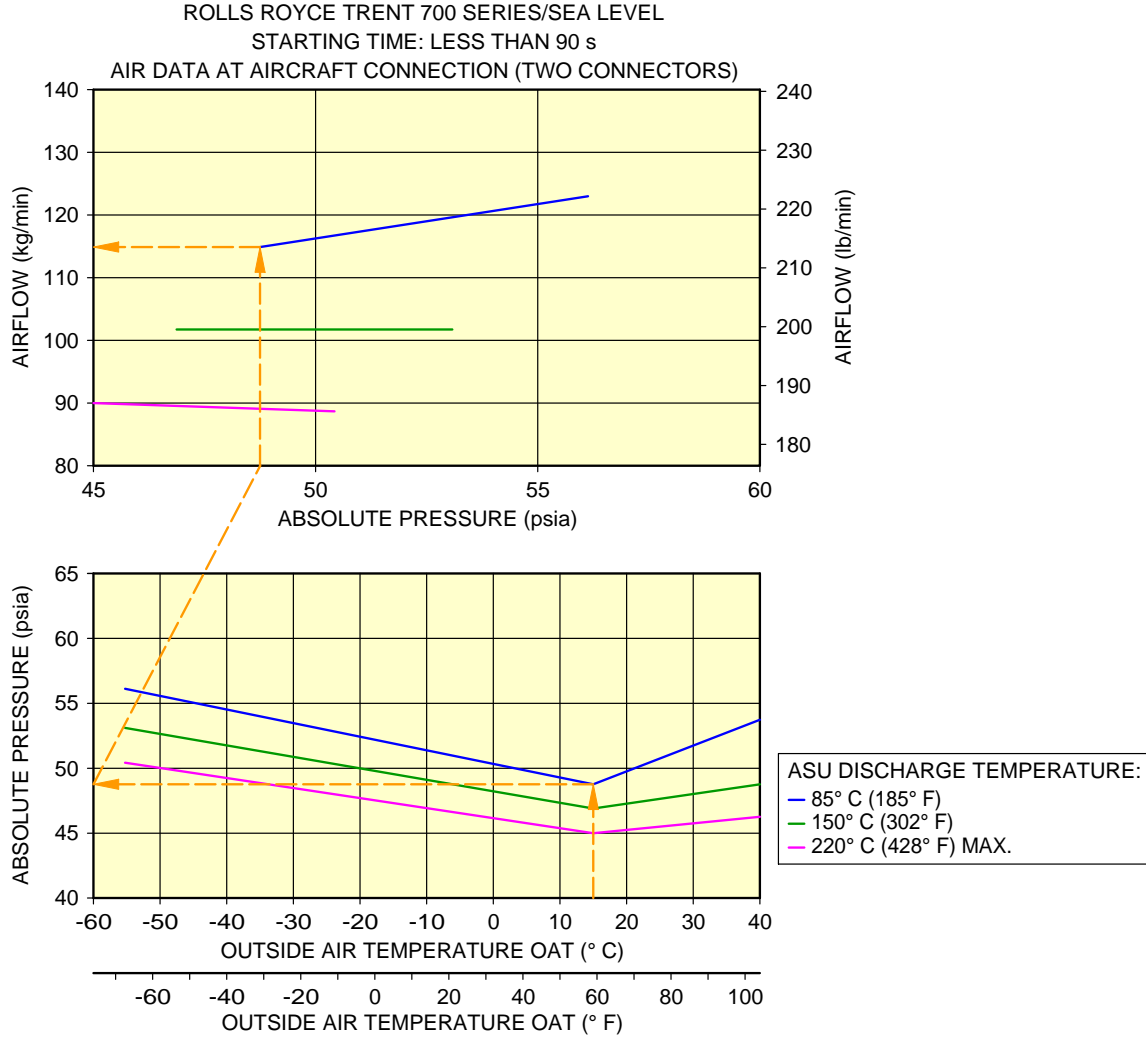

EXAMPLE:

FOR AN OAT OF 15° C (59° F) AND AN ASU PROVIDING A DISCHARGE TEMPERATURE OF 85° C (185° F) AT HPGC:

- THE REQUIRED PRESSURE AT HPGC IS 48.85 psia
- THE REQUIRED AIRFLOW AT HPGC IS 114.9 kg/min.

NOTE:

IN CASE THE ACTUAL DISCHARGE TEMPERATURE OF THE ASU DIFFERS SUBSTANTIALLY FROM THE ONES GIVEN IN THE CHARTS, A SIMPLE INTERPOLATION (LINEAR) IS SUFFICIENT TO DETERMINE THE REQUIRED AIR DATA.

EXAMPLE:

FOR AN OAT OF 15° C (59° F) AND AN ASU PROVIDING A DISCHARGE TEMPERATURE OF 117.5° C (243.5° F) AT HPGC, INTERPOLATING BETWEEN THE LINES 85° C (185° F) AND 150° C (302° F) RESULTS IN:

- A REQUIRED PRESSURE AT HPGC OF 47.84 psia
- A REQUIRED AIRFLOW AT HPGC OF 113.9 kg/min.

F_AC_050500_1_0110101_01_00

Engine Starting Pneumatic Requirements
Rolls Royce Trent 700 Series Engine
FIGURE-5-5-0-991-011-A01

5-6-0 Ground Pneumatic Power Requirements****ON A/C A330-700L**Ground Pneumatic Power Requirements

1. Not applicable.

5-7-0 Preconditioned Airflow Requirements****ON A/C A330-700L**Preconditioned Airflow Requirements

1. Not applicable.

5-8-0 Ground Towing Requirements

**ON A/C A330-700L

Ground Towing Requirements

1. This section gives information on aircraft towing.

The A330-700L is designed with means for conventional or towbarless towing. Information/procedures can be found for both in chapter 9 of the Aircraft Maintenance Manual.

Status on towbarless towing equipment qualification can be found in ISI 09.11.00001.

It is possible to tow or push the aircraft, at maximum ramp weight with engines at zero or up to idle thrust, using a towbar attached to the NLG. One towbar fitting is installed at the front of the leg (optional towing fitting for towing from the rear of the NLG available).

The main landing gears have attachment points for towing or debogging.

This section shows the chart to determine the drawbar pull and tow tractor mass requirements as a function of the following physical characteristics:

- Aircraft weight
- Number of engines at idle
- Slope.

The chart is based on the A330 engine type with the highest idle thrust.

The chart is therefore valid for A330-700L model.

2. Towbar design guidelines

The aircraft towbar shall comply with the following standards:

- ISO 8267-1, "Aircraft - Towbar Attachment Fitting - Interface Requirements - Part 1: Main Line Aircraft"
- ISO 9667, "Aircraft Ground Support Equipment - Towbars"
- IATA Airport Handling Manual AHM 958, "Functional Specification for an Aircraft Towbar".

A conventional type towbar is required which should be equipped with a damping system (to protect the NLG against jerks) and with towing shear pins:

- A traction shear pin calibrated at 28 620 daN (64 340 lbf),
- A torsion pin calibrated at 3 130 m.daN (276 991 lbf.in).

The towing head is designed according to ISO 8267-1, cat. III.

3. This section gives information on aircraft towing with towbarless tractors.

There are special approval procedures for towbarless tractors. Before towing, make sure that the towbarless tractor is approved for towing A330-700L.

The list of towbarless towing vehicles that are specially accepted for A330-700L are given in Airbus In-Service Information, refer to ISI 09.11.00001.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING


Ram Air Outlet (RAO) 1 and RAO 2 must be closed when a towbarless tractor approaches the aircraft.

If RAO 2 (RH) is stuck open, the towbarless towing is permitted but special attention is necessary because of the space between RAO and the tractor is very less in this configuration. For safe approach of the tractor for the aircraft towing, it is recommended to follow the aircraft center-line trajectory.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

**ON A/C A330-700L

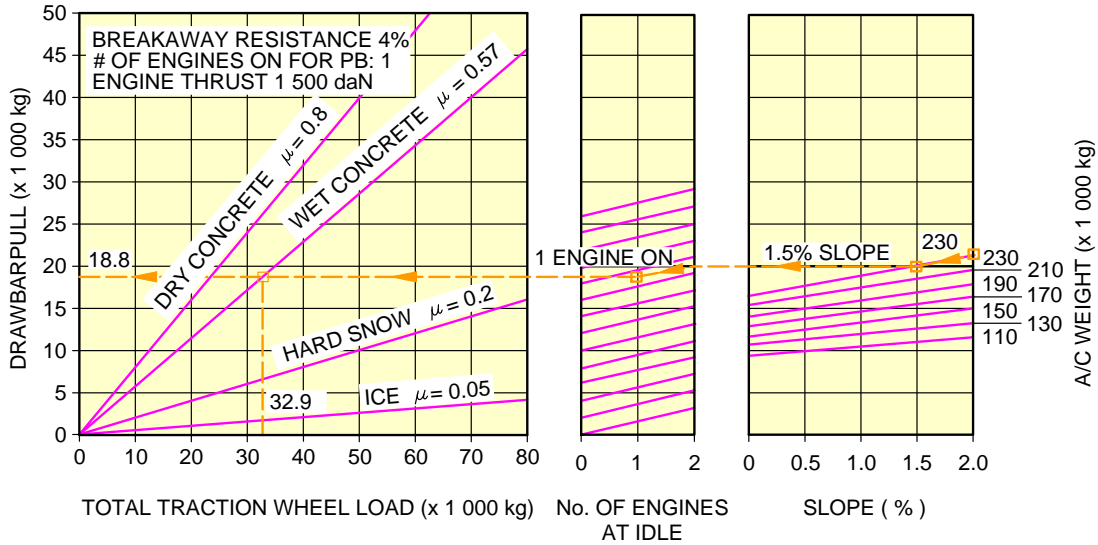

EXAMPLE HOW TO DETERMINE THE TRACTION WHEEL LOAD REQUIREMENT TO TOW A A330 AT 230 000 kg, AT 1.5% SLOPE, 1 ENGINE AT IDLE AND FOR WET TARMAC CONDITIONS:

- ON THE RIGHT HAND SIDE OF THE GRAPH, CHOOSE THE RELEVANT AIRCRAFT WEIGHT (230 000 kg),
- FROM THIS POINT DRAW A PARALLEL LINE TO THE REQUIRED SLOPE PERCENTAGE (1.5%),
- FROM THE POINT OBTAINED DRAW A STRAIGHT HORIZONTAL LINE UNTIL No. OF ENGINES AT IDLE = 2,
- FROM THIS POINT DRAW A PARALLEL LINE TO THE REQUESTED No. OF ENGINES (1),
- FROM THIS POINT DRAW A STRAIGHT HORIZONTAL LINE TO THE DRAWBAR PULL AXIS,
- THE Y-COORDINATE OBTAINED IS THE NECESSARY DRAWBAR PULL FOR THE TRACTOR (18 800 kg),
- SEARCH THE INTERSECTION WITH THE "WET CONCRETE" LINE.
THE OBTAINED X-COORDINATE IS THE RECOMMENDED TOTAL TRACTION WHEEL LOAD (32 900 kg).

NOTE:

FOR ALL WHEEL-DRIVEN VEHICLES, THE TOTAL TRACTION WHEEL LOAD IS THE TRACTOR WEIGHT.



F_AC_050800_1_0150101_01_01

Ground Towing Requirements
FIGURE-5-8-0-991-015-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

**ON A/C A330-700L

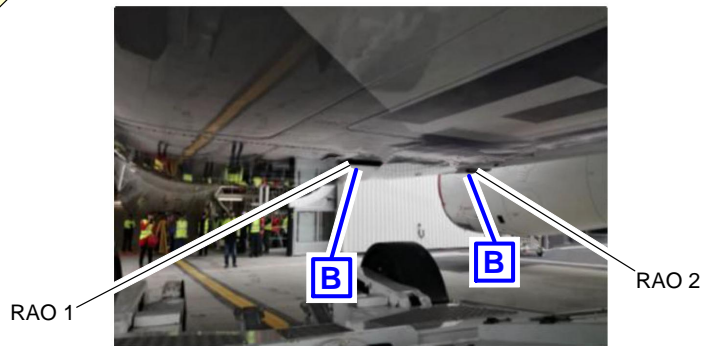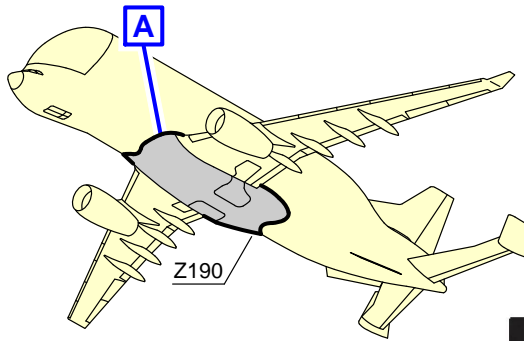

RAO LOCATION



RAO IN CLOSED POSITION



RAO IN OPENED POSITION




F_AC_050800_1_0180101_01_00

Ground Towing Requirements
Location of the RAOs (Sheet 1 of 2)
FIGURE-5-8-0-991-018-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

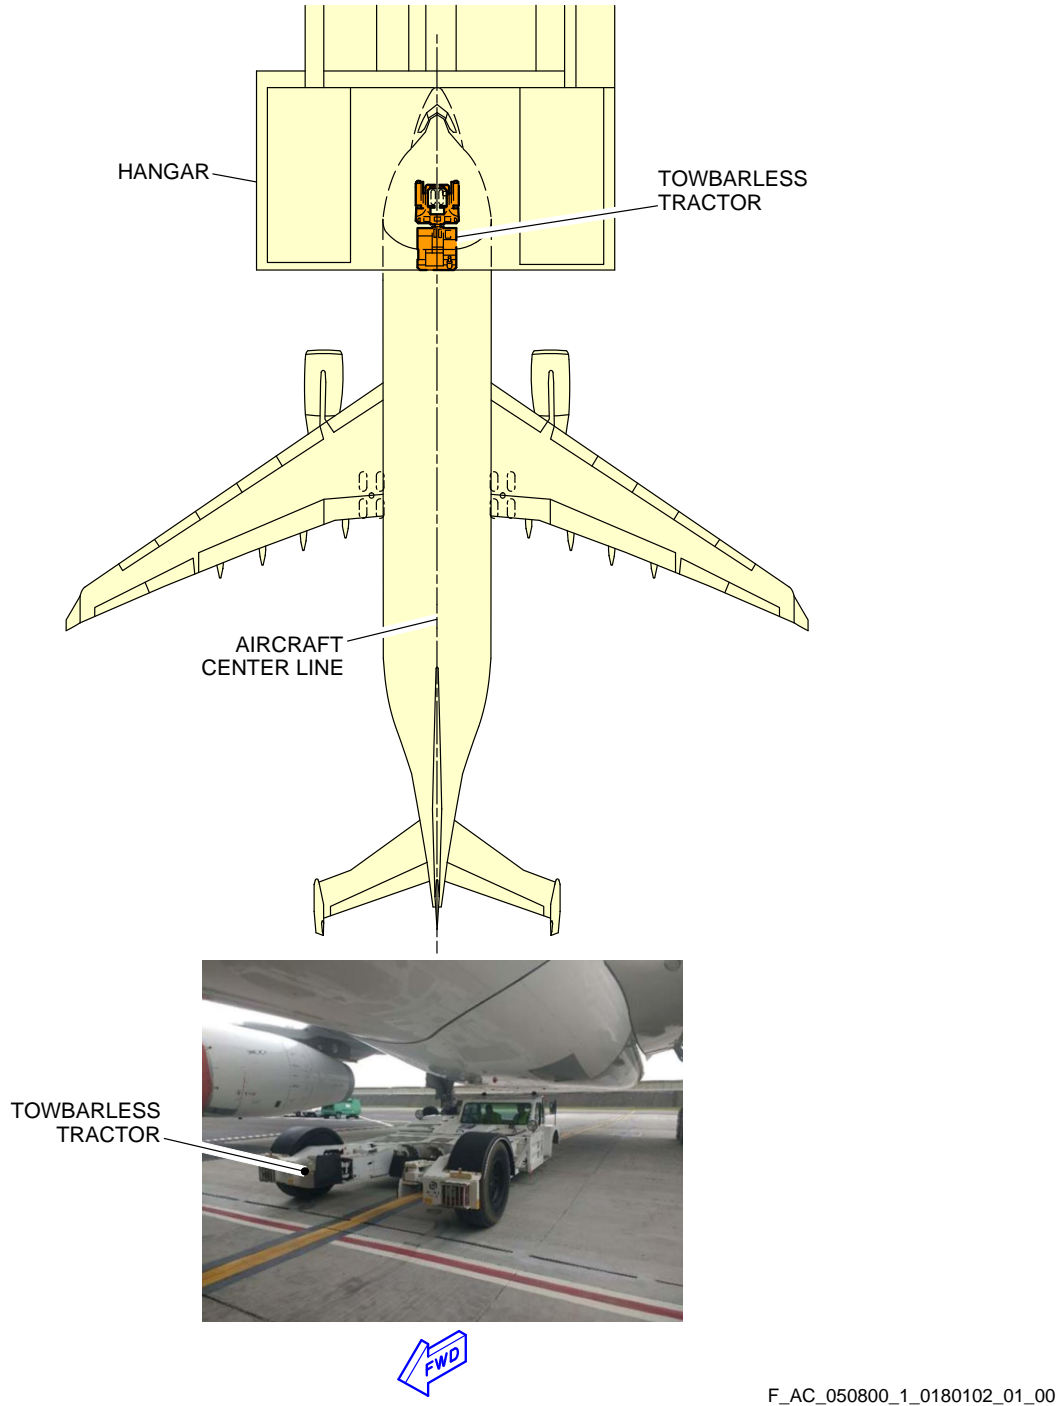

F_AC_050800_1_0180102_01_00

Ground Towing Requirements
Tractor Trajectory for Towing Operations (Sheet 2 of 2)
FIGURE-5-8-0-991-018-A01

5-9-0 De-icing and External Cleaning****ON A/C A330-700L**De-icing and External Cleaning


1. De-icing and External Cleaning on Ground

The mobile equipment for aircraft de-icing and external cleaning must be capable of reaching heights up to approximately 20 m (65.62 ft).

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

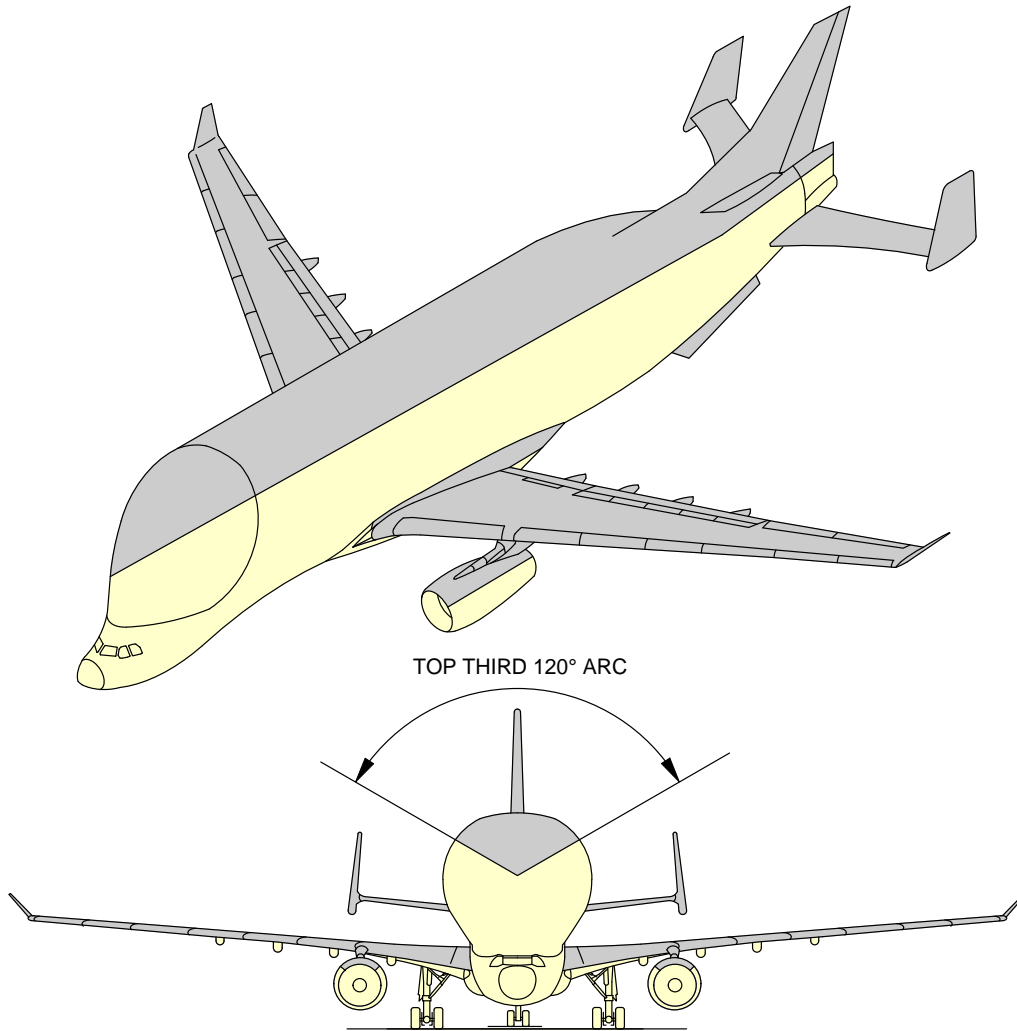

AREA	WING TOP SURFACE (BOTH SIDES)	WING TIP DEVICES (BOTH INSIDE AND OUTSIDE SURFACES) (BOTH SIDES)	HTP TOP SURFACE (BOTH SIDES)	VTP SURFACE (BOTH SIDES)	FUSELAGE TOP SURFACE (TOP THIRD- 120° ARC)	NACELLE, PYLON TOP SURFACE (TOP THIRD- 120° ARC) (ALL ENGINES)	TOTAL DE-ICED AREA
m ² (ft ²)	306 (3 294)	11 (118)	65 (700)	210 (2 260)	410 (4 413)	46 (495)	1 048 (11 281)

F_AC_050900_1_0010101_01_00

De-Icing and External Cleaning
FIGURE-5-9-0-991-001-A01

OPERATING CONDITIONS**6-1-0 Engine Exhaust Velocities and Temperatures******ON A/C A330-700L****Engine Exhaust Velocities and Temperatures****1. General**

This section shows the estimated engine exhaust efflux velocities and temperatures contours for ground idle, breakaway and maximum takeoff conditions.

6-1-1 Engine Exhaust Velocities Contours - Ground Idle Power****ON A/C A330-700L**Engine Exhaust Velocities Contours - Ground Idle Power



1. This section gives engine exhaust velocities contours at ground idle power.

NOTE : The three values give velocities isolines values at the borders of colored areas.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

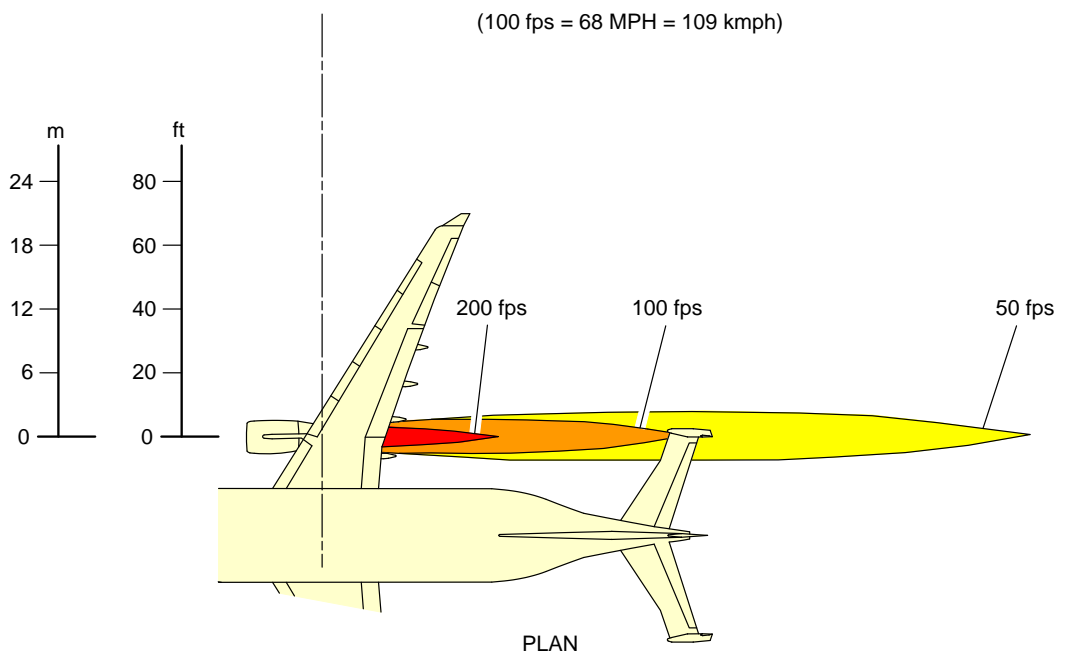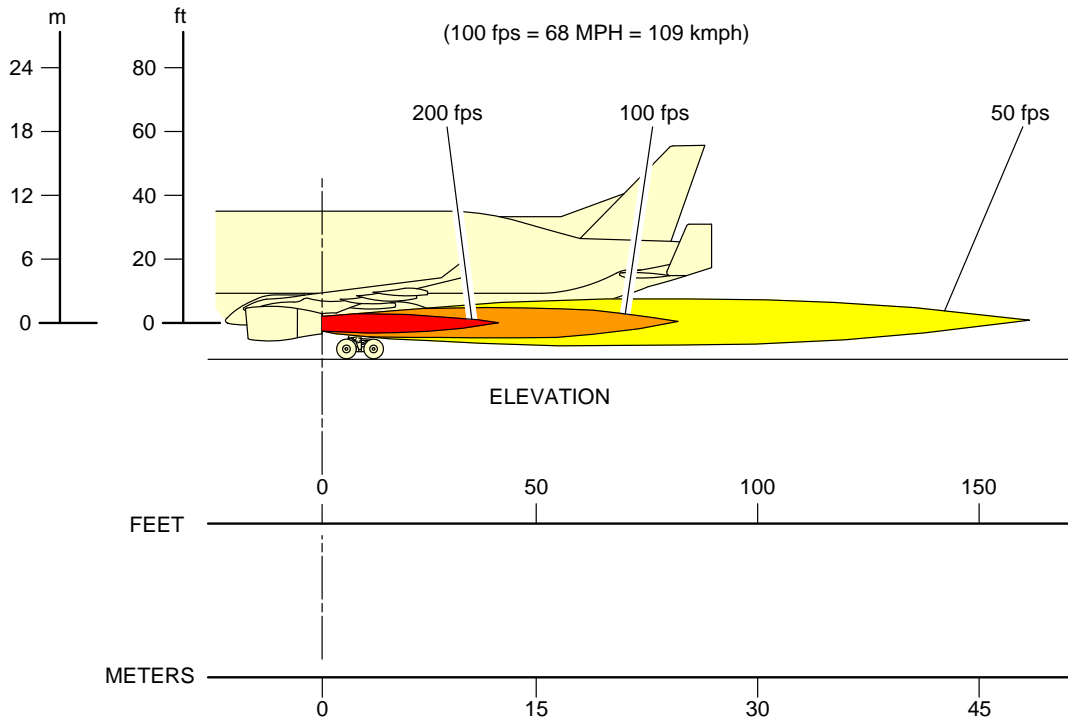

F_AC_060101_1_0070101_01_00

Engine Exhaust Velocities
Ground Idle Power - RR Trent 700 Series Engine
FIGURE-6-1-1-991-007-A01

6-1-2 Engine Exhaust Temperatures Contours - Ground Idle Power****ON A/C A330-700L**Engine Exhaust Temperatures Contours - Ground Idle Power


1. This section gives engine exhaust temperatures contours at ground idle power.

NOTE : The three values give temperature isolines values at the borders of colored areas.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

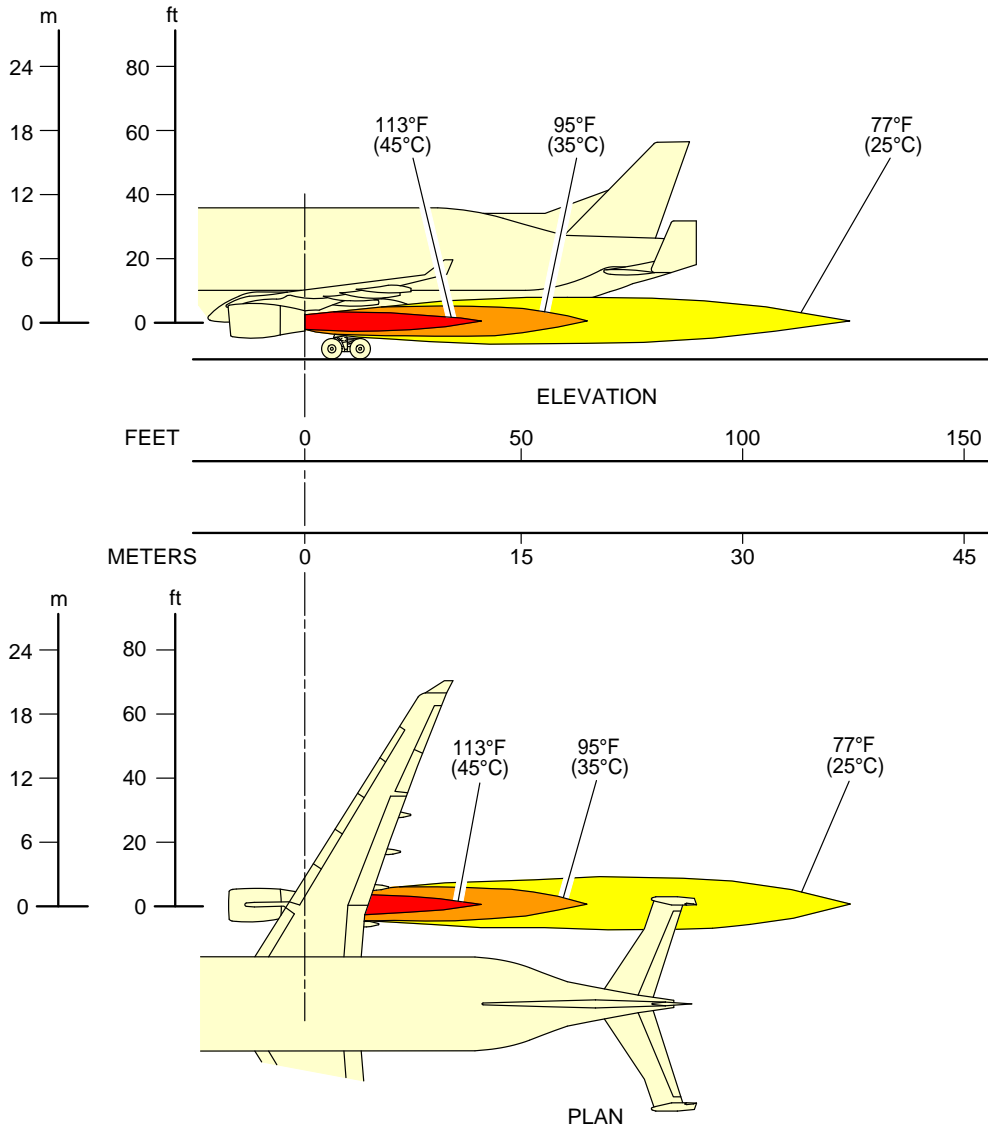

F_AC_060102_1_0070101_01_00

Engine Exhaust Temperatures
Ground Idle Power - RR Trent 700 Series Engine
FIGURE-6-1-2-991-007-A01

6-1-3 Engine Exhaust Velocities Contours - Breakaway Power****ON A/C A330-700L**Engine Exhaust Velocities Contours - Breakaway Power


1. This section gives engine exhaust velocities contours at breakaway power.

NOTE : The three values give velocities isolines values at the borders of colored areas.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

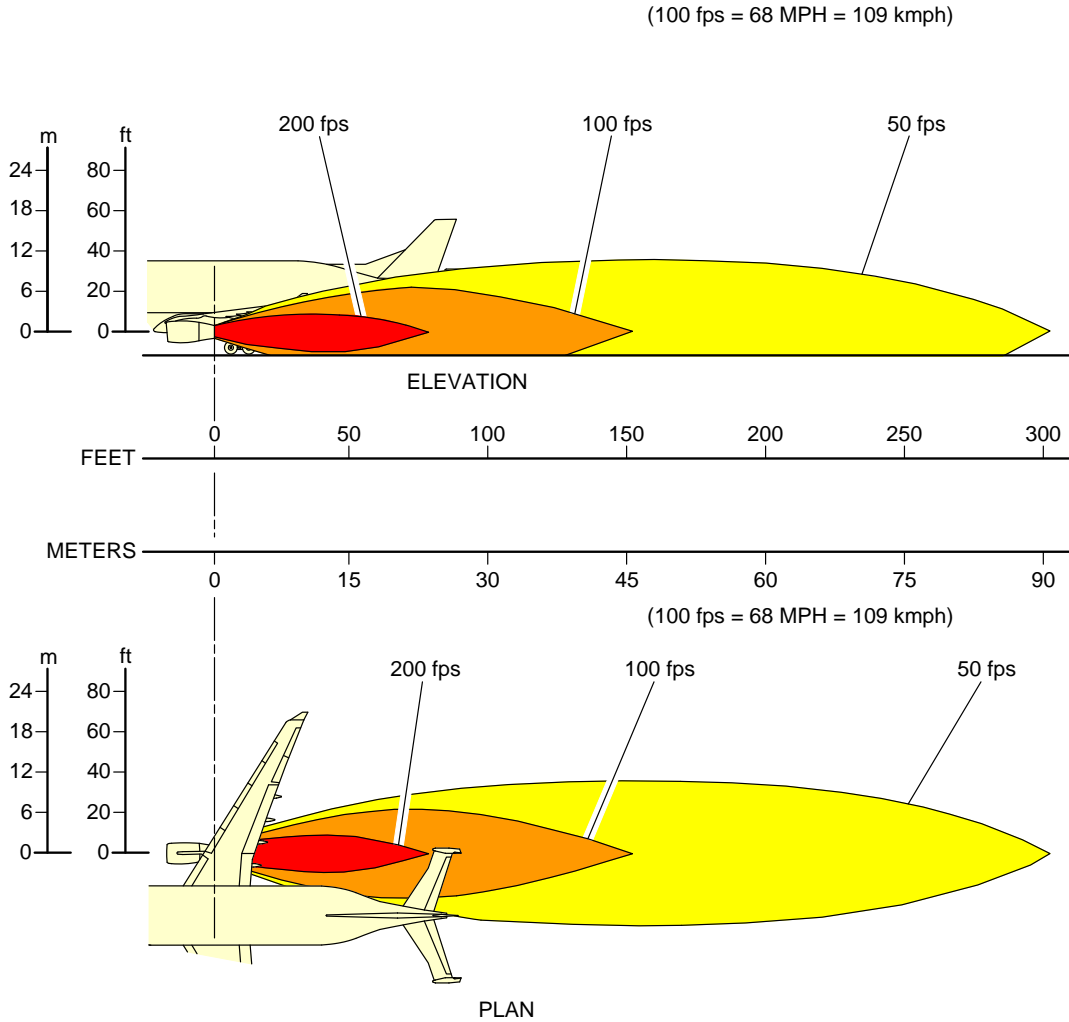

F_AC_060103_1_0090101_01_00

Engine Exhaust Velocities
Breakaway Power - RR Trent 700 Series Engine
FIGURE-6-1-3-991-009-A01

6-1-4 Engine Exhaust Temperatures Contours - Breakaway Power****ON A/C A330-700L**Engine Exhaust Temperatures Contours - Breakaway Power


1. This section gives engine exhaust temperatures contours at breakaway power.

NOTE : The three values give temperature isolines values at the borders of colored areas.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

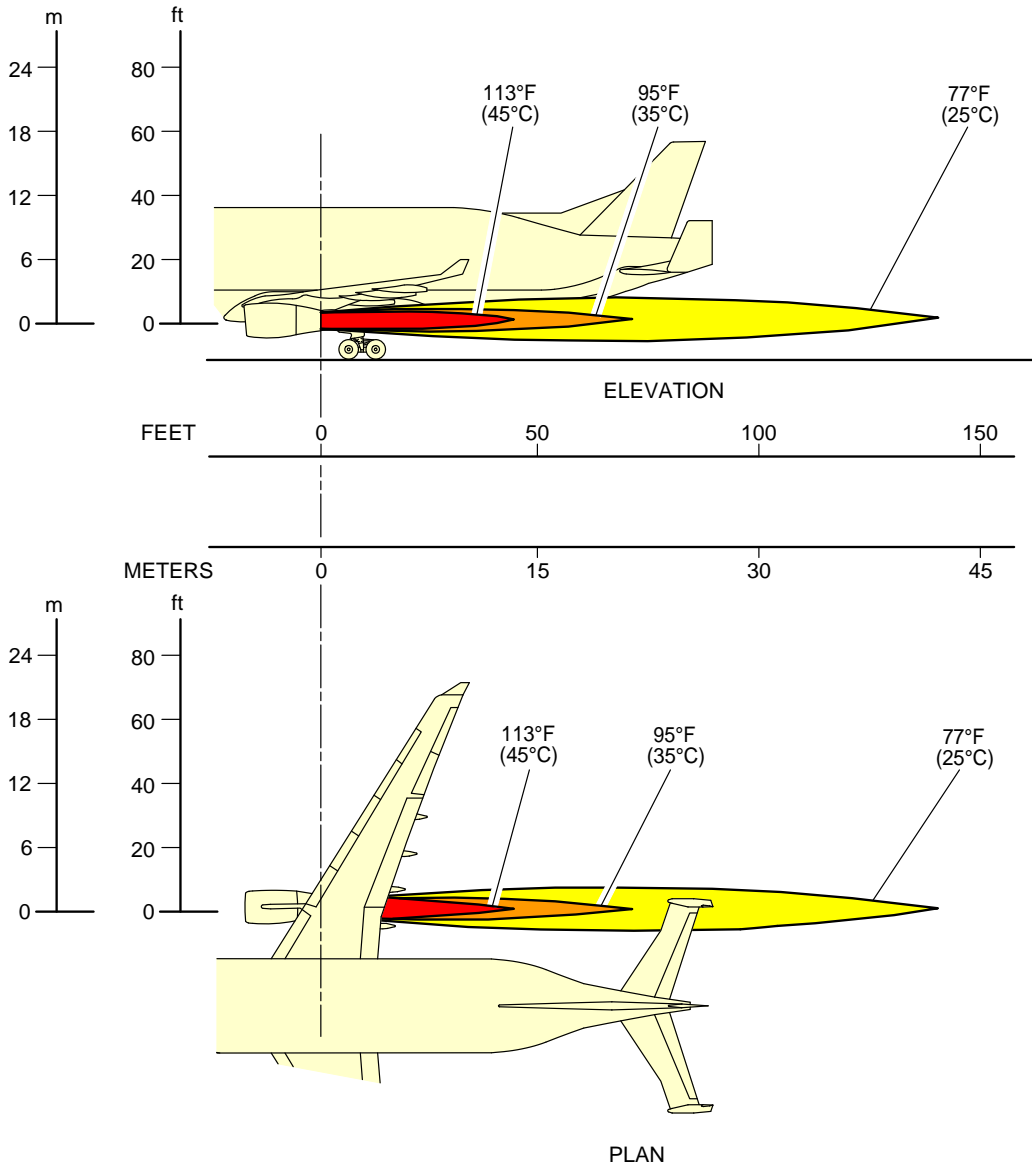

F_AC_060104_1_0090101_01_00


Engine Exhaust Temperatures
Breakaway Power - RR Trent 700 Series Engine
FIGURE-6-1-4-991-009-A01

6-1-5 Engine Exhaust Velocities Contours - Takeoff Power****ON A/C A330-700L**Engine Exhaust Velocities Contours - Takeoff Power

1. This section gives engine exhaust velocities contours at takeoff power.

NOTE : The three values give velocities isolines values at the borders of colored areas.

****ON A/C A330-700L**

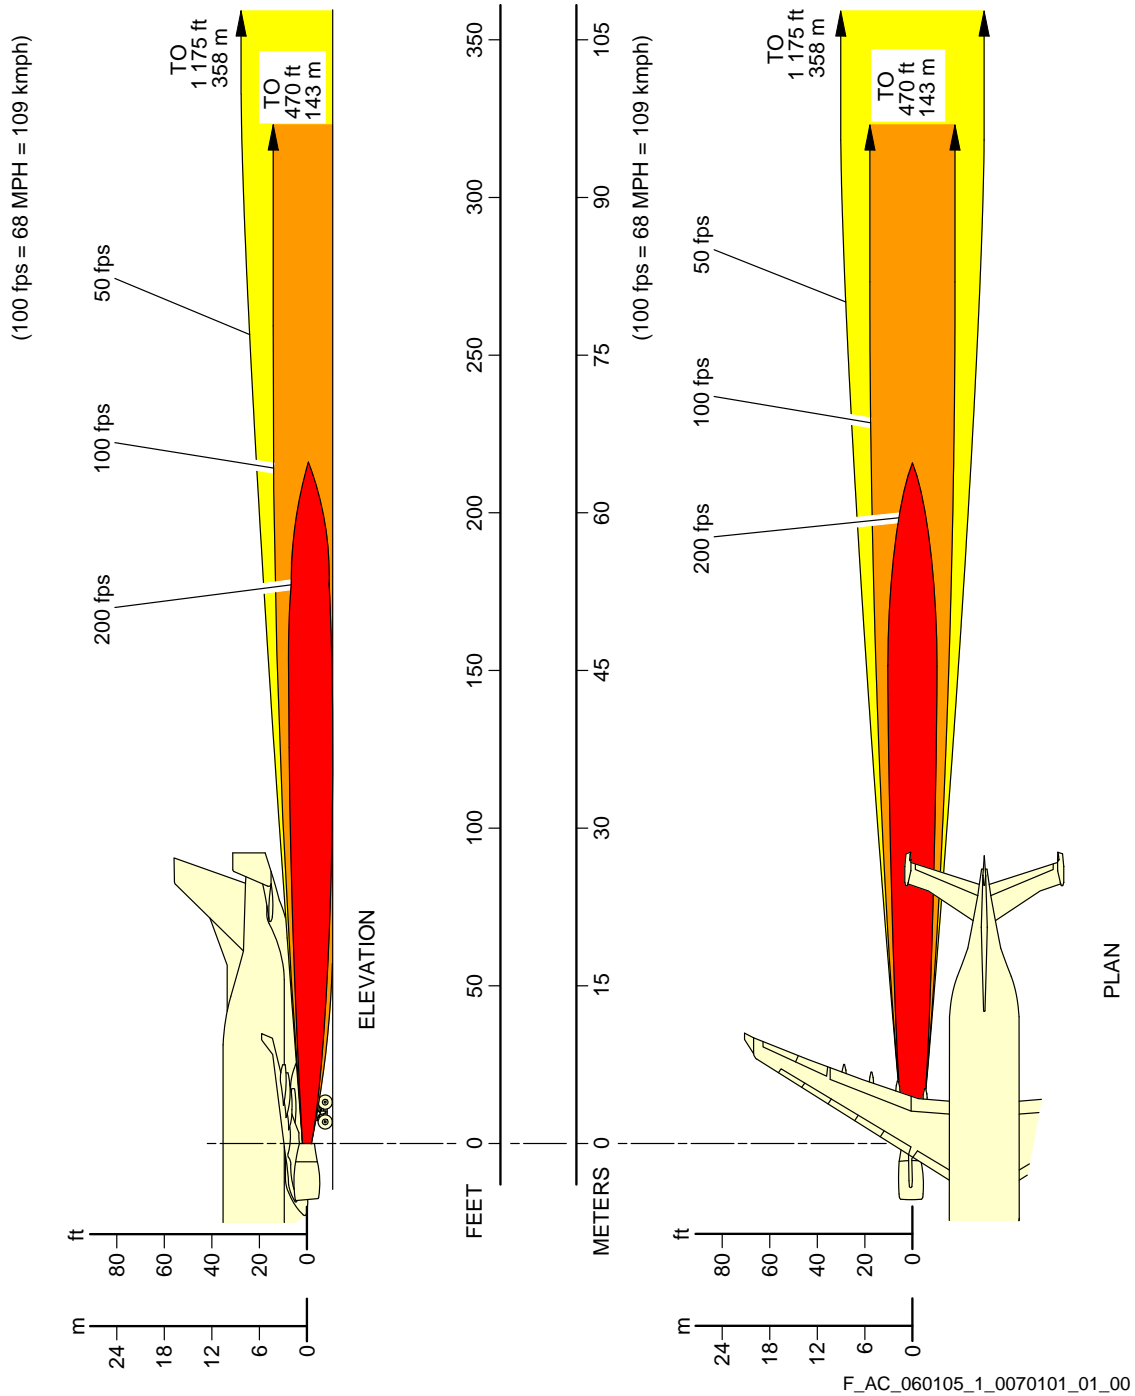


Engine Exhaust Velocities
Takeoff Power - RR Trent 700 Series Engine
FIGURE-6-1-5-991-007-A01

6-1-6 Engine Exhaust Temperatures Contours - Takeoff Power****ON A/C A330-700L**Engine Exhaust Temperatures Contours - Takeoff Power

1. This section gives engine exhaust temperatures contours at takeoff power.

NOTE : The three values give temperature isolines values at the borders of colored areas.

****ON A/C A330-700L**

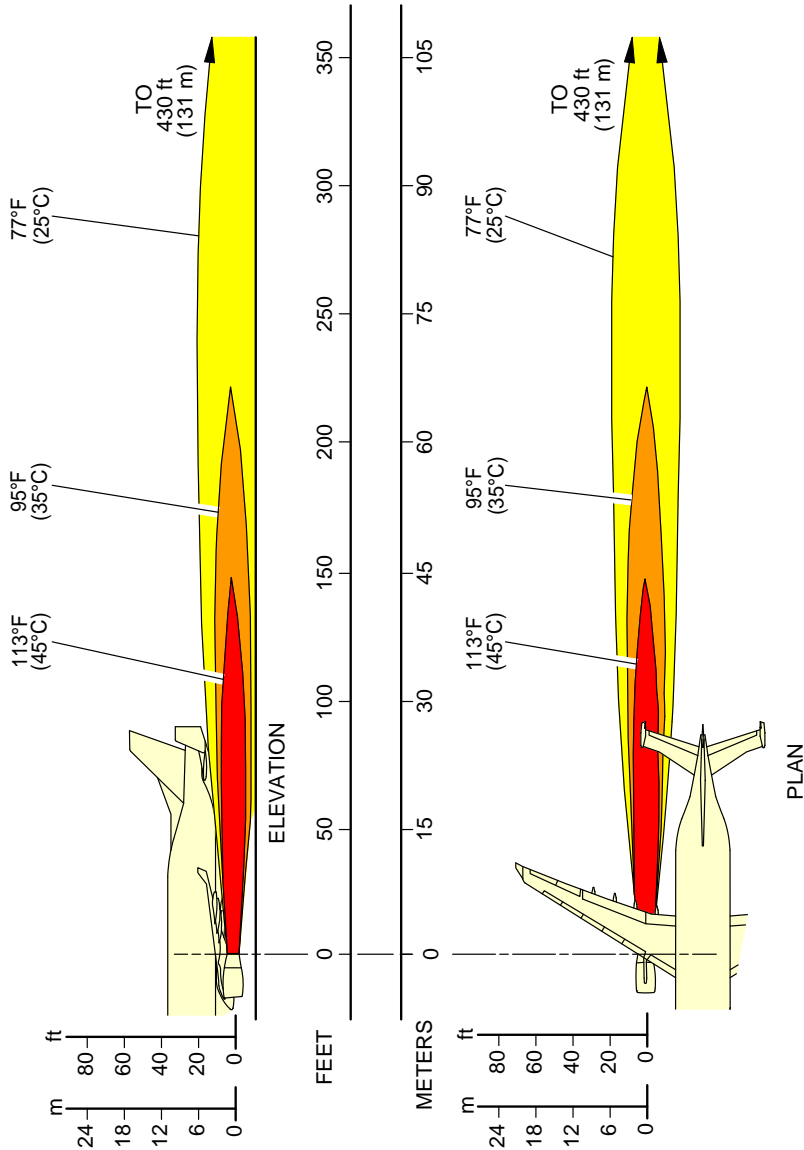

F_AC_060106_1_0070101_01_00

Engine Exhaust Temperatures
 Takeoff Power - RR Trent 700 Series Engine
 FIGURE-6-1-6-991-007-A01

6-3-0 Danger Areas of Engines****ON A/C A330-700L**Danger Areas of Engines

1. Danger Areas of the Engines.


6-3-1 Ground Idle Power****ON A/C A330-700L**Ground Idle Power

1. This section gives danger areas of the engines at ground idle power conditions.




A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

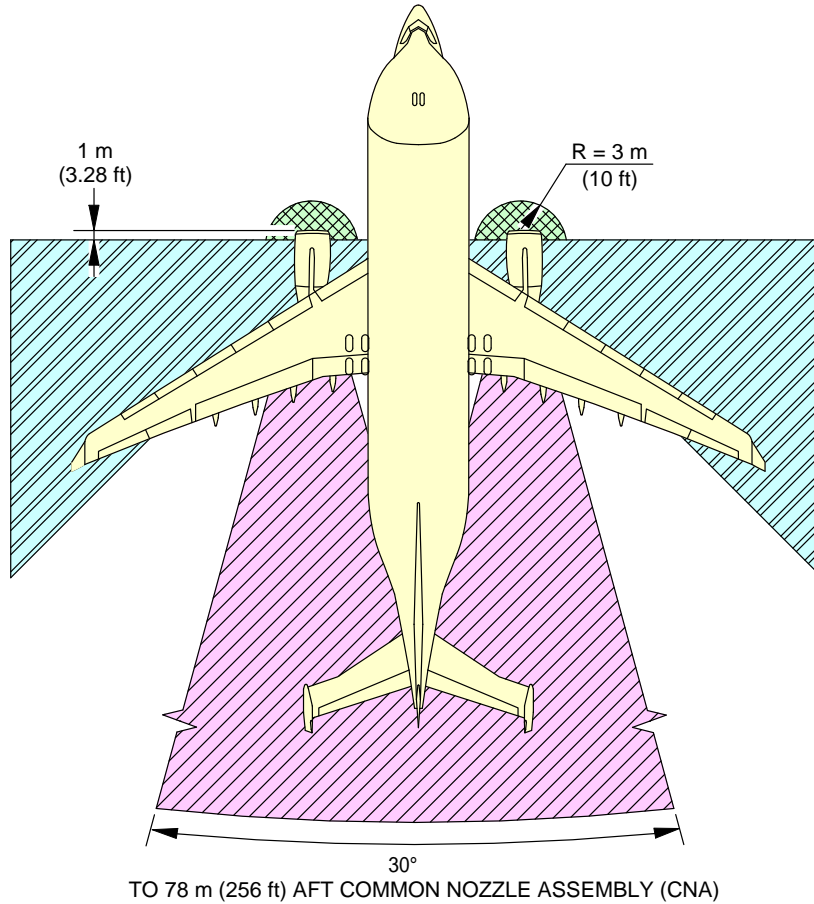

NOTE:

-  INTAKE SUCTION DANGER AREA MINIMUM POWER
-  ENTRY CORRIDOR
-  EXHAUST DANGER AREA

F_AC_060301_1_0070101_01_00

Danger Areas of Engines
RR Trent 700 Series Engine
FIGURE-6-3-1-991-007-A01


6-3-2 Breakaway Power****ON A/C A330-700L**Breakaway Power

1. This section gives danger areas of the engines at breakaway power conditions.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

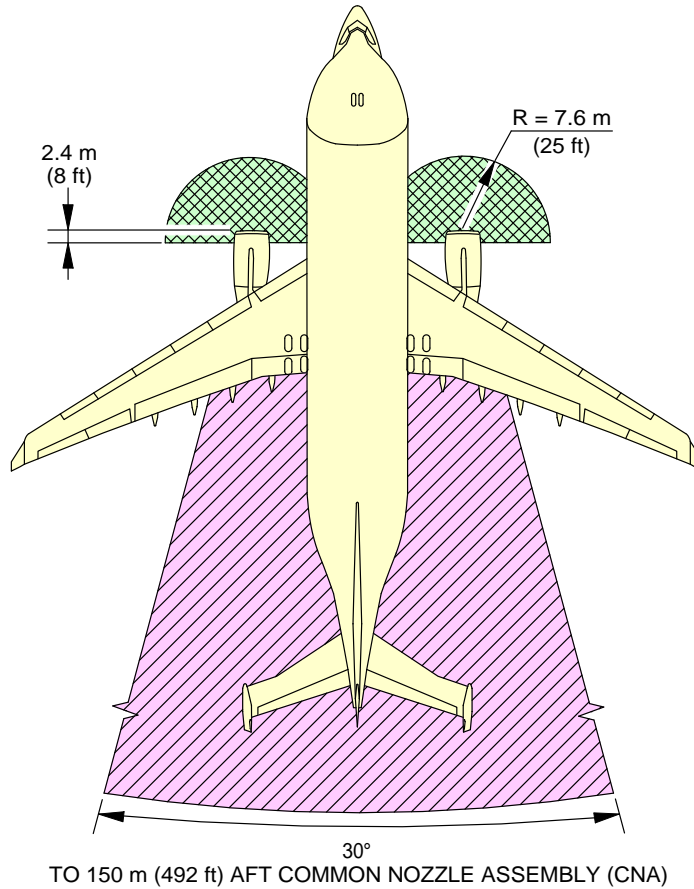

NOTE:



INTAKE SUCTION DANGER AREA BREAKAWAY POWER



EXHAUST DANGER AREA

F_AC_060302_1_0070101_01_01

Danger Areas of Engines
RR Trent 700 Series Engine
FIGURE-6-3-2-991-007-A01


6-3-3 Takeoff Power****ON A/C A330-700L**Take-Off Power

1. This section gives danger areas of the engines at maximum take-off power conditions.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

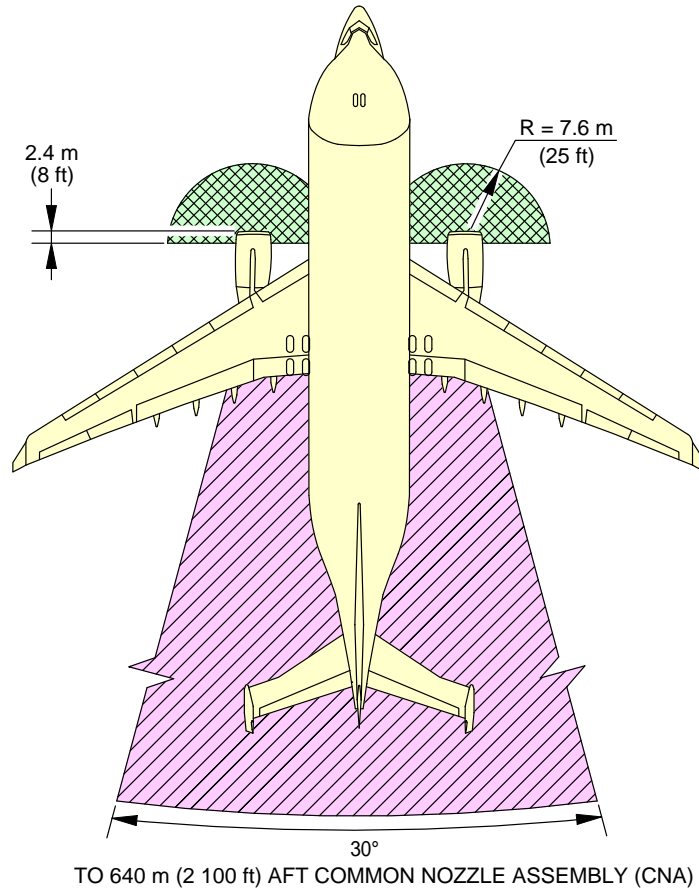

NOTE:



INTAKE SUCTION DANGER AREA TAKE-OFF POWER



EXHAUST DANGER AREA

F_AC_060303_1_0070101_01_01

Danger Areas of Engines
RR Trent 700 Series Engine
FIGURE-6-3-3-991-007-A01

6-4-0 APU Exhaust Velocities and Temperatures****ON A/C A330-700L**APU Exhaust Velocities and Temperatures

1. APU Exhaust Velocities and Temperatures.



6-4-1 APU****ON A/C A330-700L**APU - GARRETT

1. This section gives APU exhaust velocities and temperatures.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

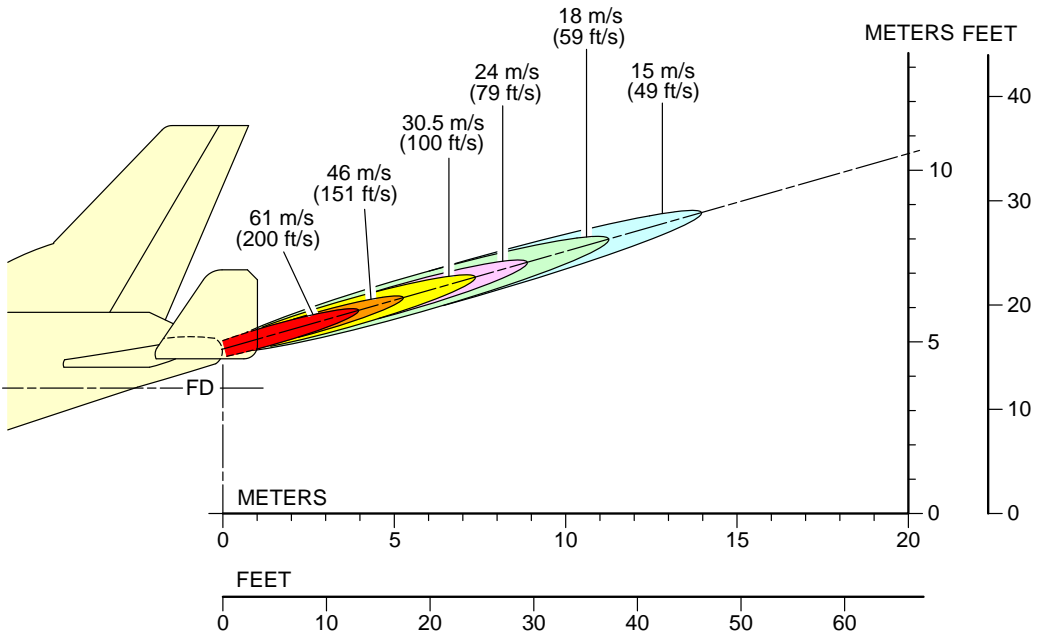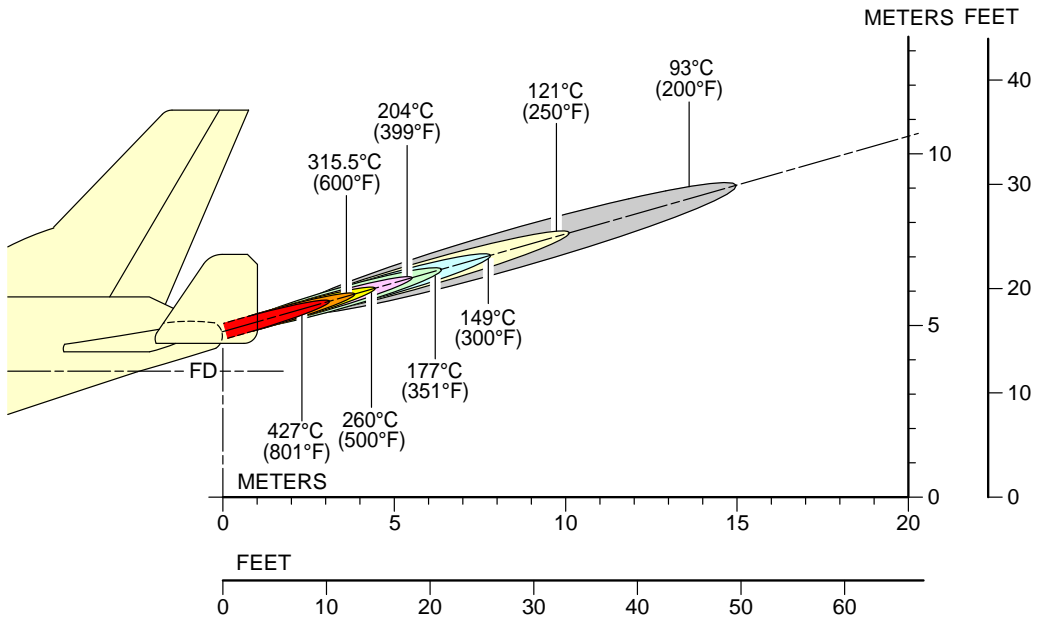

F_AC_060401_1_0040101_01_00


Exhaust Velocities and Temperatures
 APU – GARRETT GTCP 331-350
 FIGURE-6-4-1-991-004-A01

6-5-0 Pilot Visibility in Approach****ON A/C A330-700L**Pilot Visibility in Approach

1. This section gives data about pilot visibility in approach.

Distance	Value m (ft)
H	7.14 m (23.43 ft)
H1	8.91 m (29.23 ft)
H4	7.42 m (24.34 ft)

****ON A/C A330-700L**

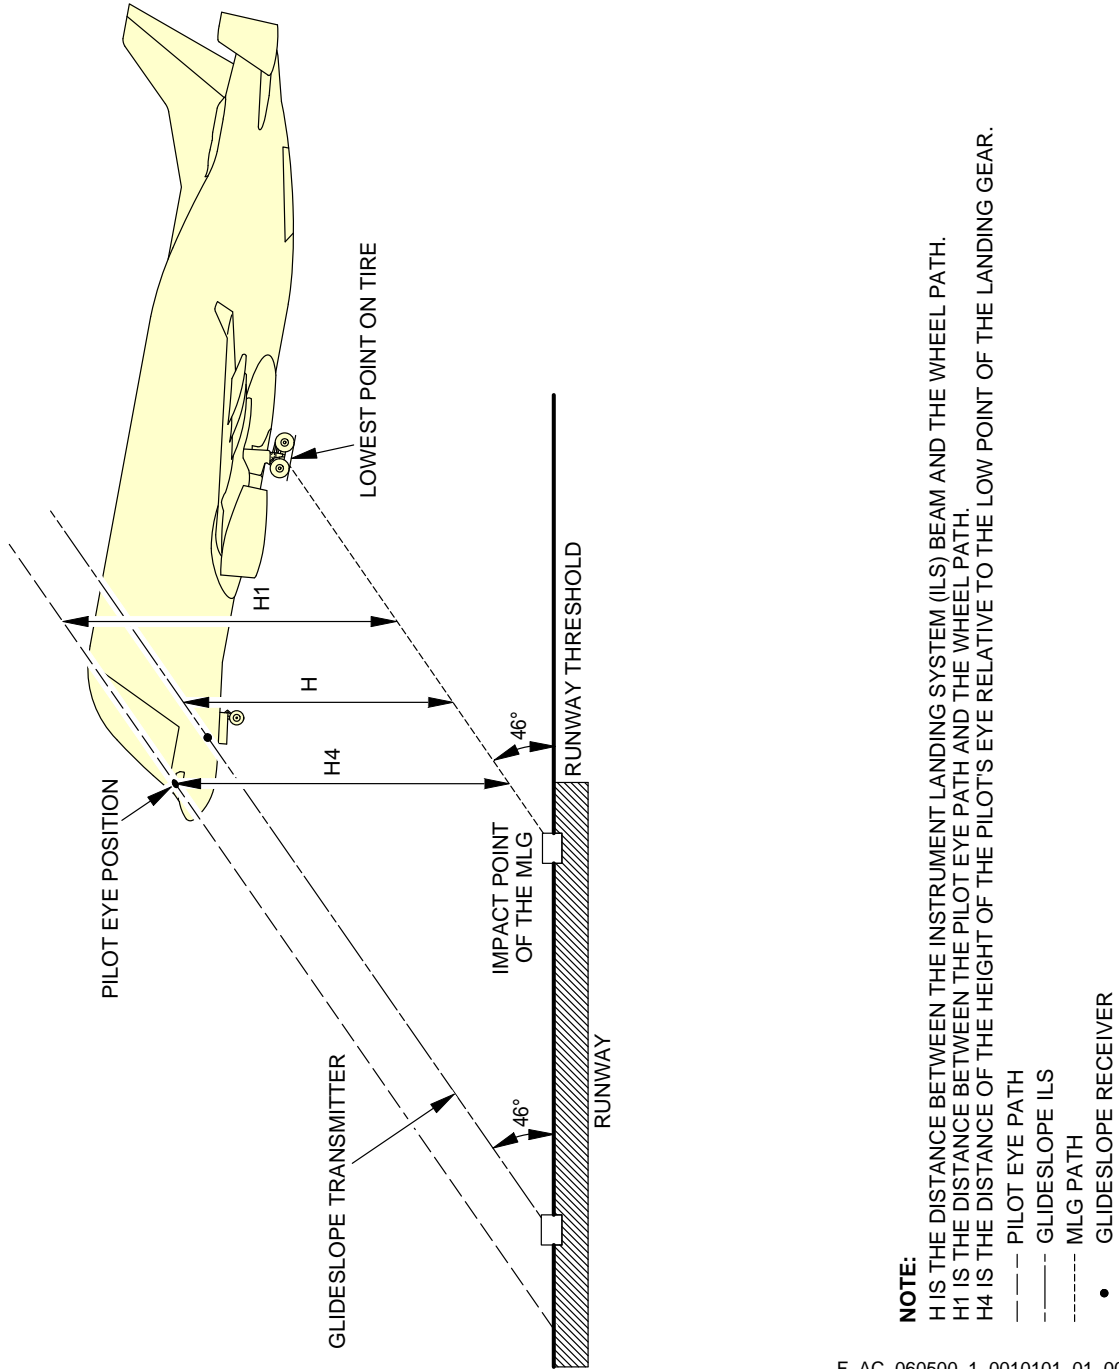

NOTE:
 H IS THE DISTANCE BETWEEN THE INSTRUMENT LANDING SYSTEM (ILS) BEAM AND THE WHEEL PATH.
 H1 IS THE DISTANCE BETWEEN THE PILOT EYE PATH AND THE WHEEL PATH.
 H4 IS THE DISTANCE OF THE HEIGHT OF THE PILOT'S EYE RELATIVE TO THE LOW POINT OF THE LANDING GEAR.

F_AC_060500_1_0010101_01_00

Pilot Visibility in Approach
 Navigation Aids
 FIGURE-6-5-0-991-001-A01

PAVEMENT DATA**7-1-0 General Information******ON A/C A330-700L**General Information

1. A brief description of the pavement charts that follow will help in airport planning.

To aid in the interpolation between the discrete values shown, each aircraft configuration is shown with a minimum range of five loads on the Main Landing Gear (MLG).

All curves on the charts represent data at a constant specified tire pressure with:

- The aircraft loaded to the Maximum Ramp Weight (MRW),
- The CG at its maximum permissible aft position.

Pavement requirements for commercial aircraft are derived from the static analysis of loads imposed on the MLG struts.

Landing Gear Footprint:

Section 07-02-00 presents basic data on the landing gear footprint configuration, MRW and tire sizes and pressures.

Maximum Pavement Loads:

Section 07-03-00 shows maximum vertical and horizontal pavement loads for certain critical conditions at the tire-ground interfaces.

Landing Gear Loading on Pavement:

The curves related to the landing gear loading on pavement are not given in section 07-04-00.

Because the relationship between the aircraft weight, the center of gravity and the landing gear loading on the pavement is not strictly linear, it cannot be shown in chart format.

But you can find in section 07-03-00 the maximum vertical and horizontal pavement loads for some critical conditions at the tire/ground interfaces for all the operational weight variants of the aircraft.

For questions that are related to landing gear loading on pavement, contact Airbus.

Flexible Pavement Requirements - US Army Corps of Engineers Design Method:

The flexible pavement requirements curves as per as U.S. Army Corps of Engineers Design Method are not given in section 07-05-00 since the related data is available through free software.

Sections 07-02-00 and 07-03-00 give all the inputs data required for the use of such software.

For questions that are related to the flexible pavement requirements, contact Airbus.

Flexible Pavement Requirements - LCN Conversion Method:

The Load Classification Number (LCN) curves are not given in section 07-06-00 since the LCN system for the reporting pavement strength is old and are replaced by the ICAO recommended ACN/PCN system in 1983 and ACR/PCR system in 2020.

For questions that are related to the LCN system, contact Airbus.

Rigid Pavement Requirements - PCA (Portland Cement Association) Design Method:

The rigid pavement requirements curves as per as Portland Cement Association Design Method are not given in section 07-07-00 since the related data is available through free software.

Sections 07-02-00 and 07-03-00 give all the inputs data required for the use of such software.

For questions that are related to the rigid pavement requirements, contact Airbus.

Rigid Pavement Requirements - LCN Conversion:

The LCN curves are not given in section 07-08-00 since the LCN system for reporting pavement strength is old and are replaced by the ICAO recommended ACN/PCN system in 1983 and ACR/PCR system in 2020.

For questions that are related to the LCN system, contact Airbus.

ACN/PCN Reporting System:

Section 07-09-00 gives ACN data prepared according to the ACN/PCN system as referenced in ICAO Annex 14, "Aerodromes", Volume 1 "Aerodrome Design and Operations".

Eighth Edition July 2018, incorporating Amendments 1 to 14 and ICAO doc 9157, "Aerodrome Design Manual", part 3 "Pavements" Second Edition 1983.

The ACN/PCN system is applicable until November 2024.

ACN is the Aircraft Classification Number and PCN is the corresponding Pavement Classification Number.

An aircraft having an ACN less than or equal to the PCN can operate without restriction on the pavement.

Numerically the ACN is two times the derived single wheel load expressed in thousands of kilograms.

The derived single wheel load is calculated as the load on a single tire inflated to 1.25 MPa (181 psi) that would have the same pavement requirements as the aircraft.

Computationally the ACN/PCN system uses PCA program PDILB for rigid pavements and S-77-1 for flexible pavements to calculate ACN values.

The Airport Authority must decide on the method of pavement analysis.

The results of their evaluation should be reported with the following format:

PCN			
PAVEMENT TYPE	SUBGRADE CATEGORY	TIRE PRESSURE CATEGORY	EVALUATION METHOD
R - Rigid	A - High	W - No limit	T - Technical
F - Flexible	B - Medium	X - To 1.75 MPa (254 psi)	U - Using Aircraft
	C - Low	Y - To 1.25 MPa (181 psi)	
	D - Ultra Low	Z - To 0.5 MPa (73 psi)	

Section 07-09-00 shows the aircraft ACN values.

For flexible pavements, the four subgrade categories are:

A. High Strength	CBR 15
B. Medium Strength	CBR 10
C. Low Strength	CBR 6
D. Ultra Low Strength	CBR 3

For rigid pavements, the four subgrade categories are:

A. High Strength	Subgrade k = 150 MN/m ³ (550 pci)
B. Medium Strength	Subgrade k = 80 MN/m ³ (300 pci)
C. Low Strength	Subgrade k = 40 MN/m ³ (150 pci)
D. Ultra Low Strength	Subgrade k = 20 MN/m ³ (75 pci)

ACR/PCR Reporting System:

Section 07-10-00 gives ACR data prepared according to the ACR/PCR system as referenced in ICAO Annex 14, "Aerodromes", Volume 1 "Aerodrome Design and Operations".

Eight Edition July 2018, incorporating Amendments 1 to 15 and ICAO doc 9157, "Aerodrome Design Manual", part 3 "Pavements" Third Edition 2021.

The ACR/PCR system is effective from November 2020 and will be applicable in November 2024.

ACR is the Aircraft Classification Rating and PCR is the related Pavement Classification Rating. An aircraft with an ACR less than or equal to the PCR can operate without restriction on the pavement.

Numerically the ACR is two times the derived single-wheel load expressed in hundreds of kilograms.

The derived single-wheel load is calculated as the load on a single tire inflated to 1.50 Mpa (218 psi) that can have the same pavement requirements as the aircraft.

Computationally the ACR/PCR system relies on the Linear Elastic Analysis (LEA).

The ACR are computed with the official ICAO-ACR software.

States can start their own methods for PCR determination, which agree with the overall parameters of the ACR/PCR method.

The results of their analysis should be reported with the following format:

PCR			
PAVEMENT TYPE	SUBGRADE CATEGORY	TIRE PRESSURE CATEGORY	EVALUATION METHOD
R - Rigid	A - High	W - No limit	T - Technical
F - Flexible	B - Medium	X - To 1.75 MPa (254 psi)	U - Using Aircraft
	C - Low	Y - To 1.25 MPa (181 psi)	
	D - Ultra Low	Z - To 0.5 MPa (73 psi)	

Section 07-10-00 shows the aircraft ACR values.

For flexible and rigid pavement, the four subgrade categories are defined based on the subgrade modulus of elasticity (E):

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

A. High Strength	E = 200 MPa (29 008 psi)
B. Medium Strength	E = 120 MPa (17 405 psi)
C. Low Strength	E = 80 MPa (11 603 psi)
D. Ultra Low Strength	E = 50 MPa (7 252 psi)

7-2-0 Landing Gear Footprint****ON A/C A330-700L**Landing Gear Footprint


1. This section gives data about the landing gear footprint in relation to the aircraft MRW and tire sizes and pressures.

The landing-gear footprint information is given for all the operational weight variants of the aircraft.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

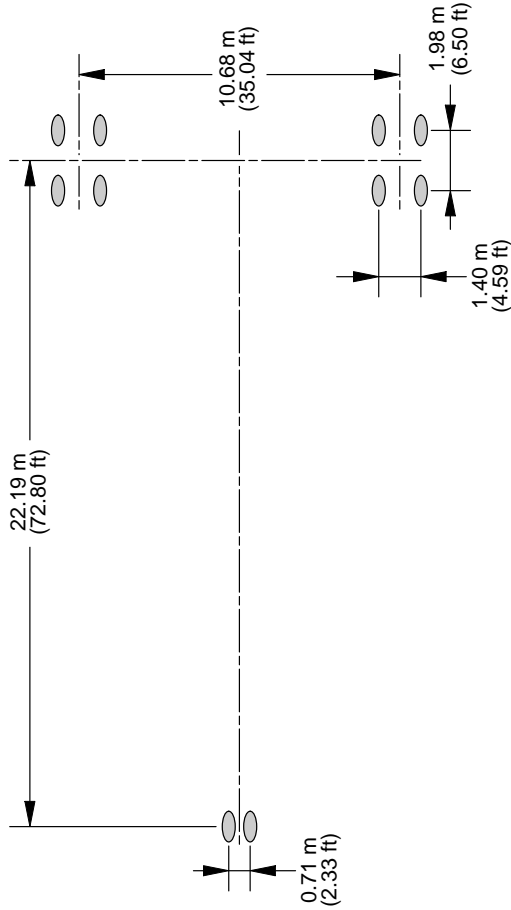

WEIGHT VARIANT	MAXIMUM RAMP WEIGHT	PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP	NOSE GEAR TIRE SIZE	NOSE GEAR TIRE PRESSURE	MAIN GEAR TIRE SIZE	MAIN GEAR TIRE PRESSURE
A330-700L WV000 ZCG +0.7 m	227 900 kg (502 425 lb)	90.1%	1050x395R16 28PR	12.7 bar (184 psi)	1400x530R23 36PR	14.2 bar (206 psi)
A330-700L WV000 ZCG +0.6 m	227 900 kg (502 425 lb)	90.4%	1050x395R16 28PR	12.7 bar (184 psi)	1400x530R23 36PR	14.2 bar (206 psi)
A330-700L WV000 ZCG +0.5 m	227 900 kg (502 425 lb)	90.7%	1050x395R16 28PR	12.7 bar (184 psi)	1400x530R23 36PR	14.2 bar (206 psi)
A330-700L WV000 ZCG +0.4 m	227 900 kg (502 425 lb)	90.9%	1050x395R16 28PR	12.7 bar (184 psi)	1400x530R23 36PR	14.2 bar (206 psi)
A330-700L WV000 ZCG +0.3 m	227 900 kg (502 425 lb)	91.2%	1050x395R16 28PR	12.7 bar (184 psi)	1400x530R23 36PR	14.2 bar (206 psi)
A330-700L WV000 ZCG +0.2 m	227 900 kg (502 425 lb)	91.5%	1050x395R16 28PR	12.7 bar (184 psi)	1400x530R23 36PR	14.2 bar (206 psi)
A330-700L WV000 ZCG +0.1 m	227 900 kg (502 425 lb)	91.7%	1050x395R16 28PR	12.7 bar (184 psi)	1400x530R23 36PR	14.2 bar (206 psi)

F_AC_070200_1_0560101_01_01

Landing Gear Footprint
(Sheet 1 of 3)
FIGURE-7-2-0-991-056-A01

****ON A/C A330-700L**

WEIGHT VARIANT	MAXIMUM RAMP WEIGHT	PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP	NOSE GEAR TIRE SIZE	NOSE GEAR TIRE PRESSURE	MAIN GEAR TIRE SIZE	MAIN GEAR TIRE PRESSURE
A330-700L WV000 ZCG 0 m	227 900 kg (502 425 lb)	91.7%	1050x395R16 28PR	12.7 bar (184 psi)	1400x530R23 36PR	14.2 bar (206 psi)
A330-700L WV000 ZCG -0.1 m	227 900 kg (502 425 lb)	91.7%	1050x395R16 28PR	12.7 bar (184 psi)	1400x530R23 36PR	14.2 bar (206 psi)
A330-700L WV000 ZCG -0.2 m	227 900 kg (502 425 lb)	91.7%	1050x395R16 28PR	12.7 bar (184 psi)	1400x530R23 36PR	14.2 bar (206 psi)
A330-700L WV000 ZCG -0.3 m	227 900 kg (502 425 lb)	91.7%	1050x395R16 28PR	12.7 bar (184 psi)	1400x530R23 36PR	14.2 bar (206 psi)
A330-700L WV000 ZCG -0.4 m	227 900 kg (502 425 lb)	91.7%	1050x395R16 28PR	12.7 bar (184 psi)	1400x530R23 36PR	14.2 bar (206 psi)
A330-700L WV000 ZCG -0.5 m	227 900 kg (502 425 lb)	91.7%	1050x395R16 28PR	12.7 bar (184 psi)	1400x530R23 36PR	14.2 bar (206 psi)
A330-700L WV001 ZCG +0.7 m	205 900 kg (453 925 lb)	91.2%	1050x395R16 28PR	12.7 bar (184 psi)	1400x530R23 36PR	14.2 bar (206 psi)
A330-700L WV001 ZCG +0.6 m	205 900 kg (453 925 lb)	91.5%	1050x395R16 28PR	12.7 bar (184 psi)	1400x530R23 36PR	14.2 bar (206 psi)
A330-700L WV001 ZCG +0.5 m	205 900 kg (453 925 lb)	91.8%	1050x395R16 28PR	12.7 bar (184 psi)	1400x530R23 36PR	14.2 bar (206 psi)
A330-700L WV001 ZCG +0.4 m	205 900 kg (453 925 lb)	92.1%	1050x395R16 28PR	12.7 bar (184 psi)	1400x530R23 36PR	14.2 bar (206 psi)
A330-700L WV001 ZCG +0.3 m	205 900 kg (453 925 lb)	92.4%	1050x395R16 28PR	12.7 bar (184 psi)	1400x530R23 36PR	14.2 bar (206 psi)
A330-700L WV001 ZCG +0.2 m	205 900 kg (453 925 lb)	92.7%	1050x395R16 28PR	12.7 bar (184 psi)	1400x530R23 36PR	14.2 bar (206 psi)
A330-700L WV001 ZCG +0.1 m	205 900 kg (453 925 lb)	92.9%	1050x395R16 28PR	12.7 bar (184 psi)	1400x530R23 36PR	14.2 bar (206 psi)
A330-700L WV001 ZCG 0 m	205 900 kg (453 925 lb)	92.9%	1050x395R16 28PR	12.7 bar (184 psi)	1400x530R23 36PR	14.2 bar (206 psi)
A330-700L WV001 ZCG -0.1 m	205 900 kg (453 925 lb)	92.9%	1050x395R16 28PR	12.7 bar (184 psi)	1400x530R23 36PR	14.2 bar (206 psi)

F_AC_070200_1_0560104_01_00

Landing Gear Footprint
(Sheet 2 of 3)
FIGURE-7-2-0-991-056-A01

****ON A/C A330-700L**

WEIGHT VARIANT	MAXIMUM RAMP WEIGHT	PERCENTAGE OF WEIGHT ON MAIN GEAR GROUP	NOSE GEAR TIRE SIZE	NOSE GEAR TIRE PRESSURE	MAIN GEAR TIRE SIZE	MAIN GEAR TIRE PRESSURE
A330-700L WV001 ZCG -0.2 m	205 900 kg (453 925 lb)	92.9%	1050x395R16 28PR	12.7 bar (184 psi)	1400x530R23 36PR	14.2 bar (206 psi)
A330-700L WV001 ZCG -0.3 m	205 900 kg (453 925 lb)	92.9%	1050x395R16 28PR	12.7 bar (184 psi)	1400x530R23 36PR	14.2 bar (206 psi)
A330-700L WV001 ZCG -0.4 m	205 900 kg (453 925 lb)	92.9%	1050x395R16 28PR	12.7 bar (184 psi)	1400x530R23 36PR	14.2 bar (206 psi)
A330-700L WV001 ZCG -0.5 m	205 900 kg (453 925 lb)	92.9%	1050x395R16 28PR	12.7 bar (184 psi)	1400x530R23 36PR	14.2 bar (206 psi)

F_AC_070200_1_0560105_01_00

Landing Gear Footprint
(Sheet 3 of 3)
FIGURE-7-2-0-991-056-A01

7-3-0 Maximum Pavement Loads****ON A/C A330-700L**Maximum Pavement Loads


1. This section gives maximum vertical and horizontal pavement loads for some critical conditions at the tire-ground interfaces.

The maximum pavement loads are given for all the operational weight variants of the aircraft.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

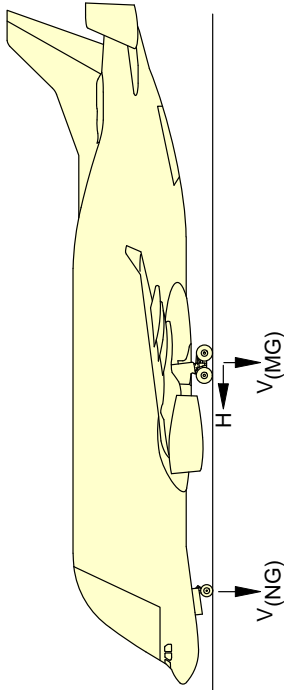

$V_{(NG)}$ MAXIMUM VERTICAL NOSE GEAR GROUND LOAD AT MOST FORWARD CG
 $V_{(MG)}$ MAXIMUM VERTICAL MAIN GEAR GROUND LOAD AT MOST AFT CG
 H MAXIMUM HORIZONTAL GROUND LOAD FROM BRAKING

1	2	3 $V_{(NG)}$		4	5 $V_{(MG)}$ (PER STRUT)		6
MODEL	MAXIMUM RAMP WEIGHT	STATIC LOAD AT MOST FWD CG	STATIC BRAKING AT 10 ft/s ² DECELERATION	STATIC BRAKING AT 10 ft/s ² DECELERATION	STATIC LOAD AT MAX AFT CG	STEADY BRAKING AT 10 ft/s ² DECELERATION	H (PER STRUT)
A330-700L WV000 ZCG +0.7 m	227 900 kg (502 425 lb)	24 700 kg (54 450 lb)	20.6% MAC (a)	43 400 kg (95 675 lb)	102 720 kg (226 450 lb)	23.6% MAC (a)	82 180 kg (181 175 lb)
A330-700L WV000 ZCG +0.6 m	227 900 kg (502 425 lb)	24 700 kg (54 450 lb)	20.6% MAC (a)	43 080 kg (94 975 lb)	103 020 kg (227 125 lb)	24.4% MAC (a)	82 410 kg (181 700 lb)
A330-700L WV000 ZCG +0.5 m	227 900 kg (502 425 lb)	24 700 kg (54 450 lb)	20.6% MAC (a)	42 760 kg (94 275 lb)	103 320 kg (227 775 lb)	25.2% MAC (a)	82 650 kg (182 225 lb)
A330-700L WV000 ZCG +0.4 m	227 900 kg (502 425 lb)	24 700 kg (54 450 lb)	20.6% MAC (a)	42 440 kg (93 575 lb)	103 610 kg (228 425 lb)	26% MAC (a)	82 890 kg (182 750 lb)
A330-700L WV000 ZCG +0.3 m	227 900 kg (502 425 lb)	24 700 kg (54 450 lb)	20.6% MAC (a)	42 130 kg (92 875 lb)	103 950 kg (229 175 lb)	26.9% MAC (a)	83 160 kg (183 325 lb)
A330-700L WV000 ZCG +0.2 m	227 900 kg (502 425 lb)	24 700 kg (54 450 lb)	20.6% MAC (a)	41 810 kg (92 175 lb)	104 250 kg (229 825 lb)	27.7% MAC (a)	83 400 kg (183 875 lb)
A330-700L WV000 ZCG +0.1 m	227 900 kg (502 425 lb)	24 700 kg (54 450 lb)	20.6% MAC (a)	41 490 kg (91 450 lb)	104 440 kg (230 250 lb)	28.2% MAC (a)	83 550 kg (184 200 lb)
A330-700L WV000 ZCG 0 m	227 900 kg (502 425 lb)	24 700 kg (54 450 lb)	20.6% MAC (a)	41 170 kg (90 750 lb)	104 440 kg (230 250 lb)	28.2% MAC (a)	83 550 kg (184 200 lb)

NOTE:
 (a) LOADS CALCULATED USING AIRCRAFT AT MRW.
 (b) BRAKED MAIN GEAR.

F_AC_070300_1_0220101_01_01

Maximum Pavement Loads
 (Sheet 1 of 3)
 FIGURE-7-3-0-991-022-A01

****ON A/C A330-700L**

1	2	3		4		5		6	
		V(NG)		H (PER STRUT)		V(MG)(PER STRUT)		H (PER STRUT)	
MODEL	MAXIMUM RAMP WEIGHT	STATIC LOAD AT MOST FWD CG	STATIC BRAKING AT 10 ft/s ² DECELERATION	STATIC LOAD AT MAX AFT CG	STEADY BRAKING AT 10 ft/s ² DECELERATION	AT INSTANTANEOUS BRAKING COEFFICIENT = 0.8	STEADY BRAKING AT 10 ft/s ² DECELERATION	AT INSTANTANEOUS BRAKING COEFFICIENT = 0.8	
A330-700L WV000 ZCG -0.1 m	227 900 kg (502 425 lb)	24 700 kg (54 450 lb) 20.6% MAC (a)	40 850 kg (90 050 lb)	104 440 kg (230 250 lb) 28.2% MAC (a)	35 420 kg (78 075 lb)	83 550 kg (184 200 lb)	35 420 kg (78 075 lb)	83 550 kg (184 200 lb)	
A330-700L WV000 ZCG -0.2 m	227 900 kg (502 425 lb)	24 700 kg (54 450 lb) 20.6% MAC (a)	40 530 kg (89 350 lb)	104 440 kg (230 250 lb) 28.2% MAC (a)	35 420 kg (78 075 lb)	83 550 kg (184 200 lb)	35 420 kg (78 075 lb)	83 550 kg (184 200 lb)	
A330-700L WV000 ZCG -0.3 m	227 900 kg (502 425 lb)	24 700 kg (54 450 lb) 20.6% MAC (a)	40 210 kg (88 650 lb)	104 440 kg (230 250 lb) 28.2% MAC (a)	35 420 kg (78 075 lb)	83 550 kg (184 200 lb)	35 420 kg (78 075 lb)	83 550 kg (184 200 lb)	
A330-700L WV000 ZCG -0.4 m	227 900 kg (502 425 lb)	24 700 kg (54 450 lb) 20.6% MAC (a)	39 890 kg (87 950 lb)	104 440 kg (230 250 lb) 28.2% MAC (a)	35 420 kg (78 075 lb)	83 550 kg (184 200 lb)	35 420 kg (78 075 lb)	83 550 kg (184 200 lb)	
A330-700L WV000 ZCG -0.5 m	227 900 kg (502 425 lb)	24 700 kg (54 450 lb) 20.6% MAC (a)	39 570 kg (87 250 lb)	104 440 kg (230 250 lb) 28.2% MAC (a)	35 420 kg (78 075 lb)	83 550 kg (184 200 lb)	35 420 kg (78 075 lb)	83 550 kg (184 200 lb)	
A330-700L WV001 ZCG +0.7 m	205 900 kg (453 925 lb)	24 070 kg (53 075 lb) 18% MAC (a)	40 970 kg (90 325 lb)	93 920 kg (207 050 lb) 26.9% MAC (a)	32 000 kg (70 550 lb)	75 130 kg (165 650 lb)	32 000 kg (70 550 lb)	75 130 kg (165 650 lb)	
A330-700L WV001 ZCG +0.6 m	205 900 kg (453 925 lb)	24 070 kg (53 075 lb) 18% MAC (a)	40 680 kg (89 675 lb)	94 220 kg (207 725 lb) 27.8% MAC (a)	32 000 kg (70 550 lb)	75 380 kg (166 175 lb)	32 000 kg (70 550 lb)	75 380 kg (166 175 lb)	
A330-700L WV001 ZCG +0.5 m	205 900 kg (453 925 lb)	24 070 kg (53 075 lb) 18% MAC (a)	40 390 kg (89 050 lb)	94 520 kg (208 400 lb) 28.7% MAC (a)	32 000 kg (70 550 lb)	75 620 kg (166 700 lb)	32 000 kg (70 550 lb)	75 620 kg (166 700 lb)	
A330-700L WV001 ZCG +0.4 m	205 900 kg (453 925 lb)	24 070 kg (53 075 lb) 18% MAC (a)	40 100 kg (88 400 lb)	94 830 kg (209 050 lb) 29.6% MAC (a)	32 000 kg (70 550 lb)	75 860 kg (167 250 lb)	32 000 kg (70 550 lb)	75 860 kg (167 250 lb)	
A330-700L WV001 ZCG +0.3 m	205 900 kg (453 925 lb)	24 070 kg (53 075 lb) 18% MAC (a)	39 810 kg (87 775 lb)	95 130 kg (209 725 lb) 30.5% MAC (a)	32 000 kg (70 550 lb)	76 100 kg (167 775 lb)	32 000 kg (70 550 lb)	76 100 kg (167 775 lb)	
A330-700L WV001 ZCG +0.2 m	205 900 kg (453 925 lb)	24 070 kg (53 075 lb) 18% MAC (a)	39 520 kg (87 125 lb)	95 430 kg (210 400 lb) 31.4% MAC (a)	32 000 kg (70 550 lb)	76 350 kg (168 325 lb)	32 000 kg (70 550 lb)	76 350 kg (168 325 lb)	
A330-700L WV001 ZCG +0.1 m	205 900 kg (453 925 lb)	24 070 kg (53 075 lb) 18% MAC (a)	39 240 kg (86 500 lb)	95 640 kg (210 850 lb) 32% MAC (a)	32 000 kg (70 550 lb)	76 510 kg (168 675 lb)	32 000 kg (70 550 lb)	76 510 kg (168 675 lb)	
A330-700L WV001 ZCG 0 m	205 900 kg (453 925 lb)	24 070 kg (53 075 lb) 18% MAC (a)	38 950 kg (85 875 lb)	95 640 kg (210 850 lb) 32% MAC (a)	32 000 kg (70 550 lb)	76 510 kg (168 675 lb)	32 000 kg (70 550 lb)	76 510 kg (168 675 lb)	

NOTE:
(a) LOADS CALCULATED USING AIRCRAFT AT MRW.
(b) BRAKED MAIN GEAR.

F_AC_070300_1_0220102_01_00

Maximum Pavement Loads
(Sheet 2 of 3)
FIGURE-7-3-0-991-022-A01

****ON A/C A330-700L**

1	2	3		4		5		6	
		V(NG)		V(NG)		V(MG) (PER STRUT)		H (PER STRUT)	
MODEL	MAXIMUM RAMP WEIGHT	STATIC LOAD AT MOST FWD CG	STATIC BRAKING AT 10 ft/s ² DECELERATION	STATIC LOAD AT MOST FWD CG	STATIC BRAKING AT 10 ft/s ² DECELERATION	STATIC LOAD AT MAX AFT CG	STEADY BRAKING AT 10 ft/s ² DECELERATION	STEADY BRAKING AT INSTANTANEOUS BRAKING COEFFICIENT = 0.8	
A330-700L WV001 ZCG -0.1 m	205 900 kg (453 925 lb)	24 070 kg (53 075 lb) 18% MAC (a)	38 660 kg (85 225 lb)	24 070 kg (53 075 lb) 18% MAC (a)	32 000 kg (70 550 lb)	95 640 kg (210 850 lb) 32% MAC (a)	32 000 kg (70 550 lb)	76 510 kg (168 675 lb) (b)	
A330-700L WV001 ZCG -0.2 m	205 900 kg (453 925 lb)	24 070 kg (53 075 lb) 18% MAC (a)	38 370 kg (84 600 lb)	24 070 kg (53 075 lb) 18% MAC (a)	32 000 kg (70 550 lb)	95 640 kg (210 850 lb) 32% MAC (a)	32 000 kg (70 550 lb)	76 510 kg (168 675 lb) (b)	
A330-700L WV001 ZCG -0.3 m	205 900 kg (453 925 lb)	24 070 kg (53 075 lb) 18% MAC (a)	38 080 kg (83 950 lb)	24 070 kg (53 075 lb) 18% MAC (a)	32 000 kg (70 550 lb)	95 640 kg (210 850 lb) 32% MAC (a)	32 000 kg (70 550 lb)	76 510 kg (168 675 lb) (b)	
A330-700L WV001 ZCG -0.4 m	205 900 kg (453 925 lb)	24 070 kg (53 075 lb) 18% MAC (a)	37 790 kg (83 325 lb)	24 070 kg (53 075 lb) 18% MAC (a)	32 000 kg (70 550 lb)	95 640 kg (210 850 lb) 32% MAC (a)	32 000 kg (70 550 lb)	76 510 kg (168 675 lb) (b)	
A330-700L WV001 ZCG -0.5 m	205 900 kg (453 925 lb)	24 070 kg (53 075 lb) 18% MAC (a)	37 510 kg (82 675 lb)	24 070 kg (53 075 lb) 18% MAC (a)	32 000 kg (70 550 lb)	95 640 kg (210 850 lb) 32% MAC (a)	32 000 kg (70 550 lb)	76 510 kg (168 675 lb) (b)	

NOTE:
 (a) LOADS CALCULATED USING AIRCRAFT AT MRW.
 (b) BRAKED MAIN GEAR.

F_AC_070300_1_0220103_01_00

Maximum Pavement Loads
 (Sheet 3 of 3)
 FIGURE-7-3-0-991-022-A01

7-4-0 Landing Gear Loading on Pavement****ON A/C A330-700L**Landing Gear Loading on Pavement

1. The curves related to the landing gear loading on pavement are not given in section 07-04-00. Because the relationship between the aircraft weight, the center of gravity and the landing gear loading on the pavement is not strictly linear, it cannot be shown in chart format. But you can find in section 07-03-00 the maximum vertical and horizontal pavement loads for some critical conditions at the tire/ground interfaces for all the operational weight variants of the aircraft. For questions that are related to the landing gear loading on pavement, contact Airbus.

7-5-0 Flexible Pavement Requirements - U.S. Army Corps of Engineers Design Method****ON A/C A330-700L**Flexible Pavement Requirements - US Army Corps of Engineers Design Method

1. The flexible pavement requirements curves as per as U.S. Army Corps of Engineers Design Method are not given in section 07-05-00 since the related data is available through free software.
Sections 07-02-00 and 07-03-00 give all the inputs data required for the use of such software.

NOTE : The U.S. Army Corps of Engineers Design Method for flexible pavements is being gradually superseded by mechanistic-empirical design methods mostly relying on Linear Elastic Analysis (LEA). The number of parameters considered by such methods is not applicable for a chart format and the use of dedicated pavement-design software is necessary.

For questions that are related to the flexible pavement requirements, contact Airbus.

7-6-0 Flexible Pavement Requirements - LCN Conversion****ON A/C A330-700L**Flexible Pavement Requirements - LCN Conversion

1. The Load Classification Number (LCN) curves are not given in section 07-06-00 since the LCN system for the reporting pavement strength is old and are replaced by the ICAO recommended ACN/PCN system in 1983 and ACR/PCR system in 2020.
For questions that are related to the LCN system, contact Airbus.

7-7-0 Rigid Pavement Requirements - Portland Cement Association Design Method****ON A/C A330-700L**Rigid Pavement Requirements - Portland Cement Association Design Method

1. The rigid-pavement requirements curves by Portland Cement Association Design Method are not given in section 07-07-00 since the related data is available through free software. Sections 07-02-00 and 07-03-00 give all the inputs data required for the use of such software.

NOTE : The Portland Cement Association Design Method for rigid pavements is being gradually superseded by mechanistic-empirical design methods mostly relying on Finite Element Analysis (FEM). The number of parameters considered by such methods is not applicable for a chart format and the use of dedicated pavement-design is necessary.

For questions that are related to the rigid pavement requirements, contact Airbus.

7-8-0 Rigid Pavement Requirements - LCN Conversion****ON A/C A330-700L**Rigid Pavement Requirements - LCN Conversion

1. The Load Classification Number (LCN) curves are not given in section 07-08-00 since the LCN system for the reporting pavement strength is old and are replaced by the ICAO recommended ACN/PCN system in 1983 and ACR/PCR system in 2020.
For questions that are related to the LCN system, contact Airbus.

7-9-0 ACN/PCN Reporting System - Flexible and Rigid Pavements

****ON A/C A330-700L**

ACN/PCN Reporting System - Flexible and Rigid Pavements

1. This section gives data about the Aircraft Classification Number (ACN) for an aircraft gross weight in relation with standard subgrade strength values for flexible and rigid pavement.
To find the ACN of an aircraft on flexible and rigid pavement, you must know the aircraft gross weight and the subgrade strength.

NOTE : An aircraft with an ACN equal to or less than the reported PCN can operate on that pavement, subject to any limitation on the tire pressure.
(Ref: ICAO Aerodrome Design Manual, Part 3, Chapter 1, Second Edition 1983).

2. Aircraft Classification Number - ACN table

The tables in figure FIGURE 7-9-0-991-028-A gives ACN data in tabular format for all the operational weight variants of the aircraft.

As an approximation, use a linear interpolation in order to get the ACN at the required operating weight using the following equation:

$$- \text{ACN} = \text{ACN min} + (\text{ACN max} - \text{ACN min}) \times (\text{Operating Weight} - 130\,000 \text{ kg}) / (\text{MRW} - 130\,000 \text{ kg})$$

Please note that the interpolation error may reach 5% to 10%.

As an approximation, also use a linear interpolation in order to get the aircraft weight at the pavement PCN using the following equation:

$$- \text{Operating weight} = 130\,000 \text{ kg} + (\text{MRW} - 130\,000 \text{ kg}) \times (\text{PCN} - \text{ACN min}) / (\text{ACN max} - \text{ACN min})$$

Please note that the interpolation error may reach up to 5%.

With ACN max = ACN calculated at the MRW in the table and with ACN min = ACN calculated at 130 000 kg.

For questions or specific calculation related to ACN/PCN Reporting System, contact Airbus.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

AIRCRAFT TYPE	ALL UP MASS (kg)	LOAD ON ONE MAIN GEAR LEG (%)	TIRE PRESSURE (MPa)	ACN FOR RIGID PAVEMENT SUBGRADES - MN/m ³				ACN FOR FLEXIBLE PAVEMENT SUBGRADES - CBR			
				HIGH 150	MEDIUM 80	LOW 40	ULTRA -LOW 20	HIGH 15	MEDIUM 10	LOW 6	ULTRA -LOW 3
A330-700L WV000 ZCG +0.7 m	227 900	45.1	1.42	48	56	66	78	53	57	65	88
	130 000	45.1		28	28	32	37	27	28	31	38
A330-700L WV000 ZCG +0.6 m	227 900	45.2	1.42	48	56	67	78	53	57	66	89
	130 000	45.2		28	28	32	37	27	28	31	38
A330-700L WV000 ZCG +0.5 m	227 900	45.3	1.42	48	57	67	78	53	57	66	89
	130 000	45.3		29	28	32	37	27	28	31	39
A330-700L WV000 ZCG +0.4 m	227 900	45.5	1.42	49	57	67	79	53	58	66	89
	130 000	45.5		29	28	32	37	27	29	31	39
A330-700L WV000 ZCG +0.3 m	227 900	45.6	1.42	49	57	68	79	54	58	66	90
	130 000	45.6		29	28	32	37	27	29	31	39
A330-700L WV000 ZCG +0.2 m	227 900	45.7	1.42	49	57	68	79	54	58	67	90
	130 000	45.7		29	28	32	37	28	29	31	39
A330-700L WV000 ZCG +0.1 m	227 900	45.8	1.42	49	57	68	79	54	58	67	90
	130 000	45.8		29	29	32	37	28	29	31	39
A330-700L WV000 ZCG 0 m	227 900	45.8	1.42	49	57	68	79	54	58	67	90
	130 000	45.8		29	29	32	37	28	29	31	39
A330-700L WV000 ZCG -0.1 m	227 900	45.8	1.42	49	57	68	79	54	58	67	90
	130 000	45.8		29	29	32	37	28	29	31	39
A330-700L WV000 ZCG -0.2 m	227 900	45.8	1.42	49	57	68	79	54	58	67	90
	130 000	45.8		29	29	32	37	28	29	31	39
A330-700L WV000 ZCG -0.3 m	227 900	45.8	1.42	49	57	68	79	54	58	67	90
	130 000	45.8		29	29	32	37	28	29	31	39
A330-700L WV000 ZCG -0.4 m	227 900	45.8	1.42	49	57	68	79	54	58	67	90
	130 000	45.8		29	29	32	37	28	29	31	39
A330-700L WV000 ZCG -0.5 m	227 900	45.8	1.42	49	57	68	79	54	58	67	90
	130 000	45.8		29	29	32	37	28	29	31	39

F_AC_070900_1_0280101_01_01

Aircraft Classification Number
ACN Table (Sheet 1 of 2)
FIGURE-7-9-0-991-028-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

AIRCRAFT TYPE	ALL UP MASS (kg)	LOAD ON ONE MAIN GEAR LEG (%)	TIRE PRESSURE (MPa)	ACN FOR RIGID PAVEMENT SUBGRADES - MN/m ³				ACN FOR FLEXIBLE PAVEMENT SUBGRADES - CBR			
				HIGH 150	MEDIUM 80	LOW 40	ULTRA -LOW 20	HIGH 15	MEDIUM 10	LOW 6	ULTRA -LOW 3
A330-700L WV001 ZCG +0.7 m	205 900	45.6	1.42	44	50	59	69	47	51	58	77
	130 000	45.6		29	28	32	37	27	29	31	39
A330-700L WV001 ZCG +0.6 m	205 900	45.8	1.42	44	50	59	69	48	51	58	78
	130 000	45.8		29	28	32	37	28	29	31	39
A330-700L WV001 ZCG +0.5 m	205 900	45.9	1.42	44	50	59	69	48	51	58	78
	130 000	45.9		29	29	33	37	28	29	32	39
A330-700L WV001 ZCG +0.4 m	205 900	46.1	1.42	45	51	60	70	48	51	58	78
	130 000	46.1		29	29	33	38	28	29	32	39
A330-700L WV001 ZCG +0.3 m	205 900	46.2	1.42	45	51	60	70	48	52	59	79
	130 000	46.2		29	29	33	38	28	29	32	40
A330-700L WV001 ZCG +0.2 m	205 900	46.3	1.42	45	51	60	70	48	52	59	79
	130 000	46.3		29	29	33	38	28	29	32	40
A330-700L WV001 ZCG +0.1 m	205 900	46.4	1.42	45	51	60	70	48	52	59	79
	130 000	46.4		29	29	33	38	28	29	32	40
A330-700L WV001 ZCG 0 m	205 900	46.4	1.42	45	51	60	70	48	52	59	79
	130 000	46.4		29	29	33	38	28	29	32	40
A330-700L WV001 ZCG -0.1 m	205 900	46.4	1.42	45	51	60	70	48	52	59	79
	130 000	46.4		29	29	33	38	28	29	32	40
A330-700L WV001 ZCG -0.2 m	205 900	46.4	1.42	45	51	60	70	48	52	59	79
	130 000	46.4		29	29	33	38	28	29	32	40
A330-700L WV001 ZCG -0.3 m	205 900	46.4	1.42	45	51	60	70	48	52	59	79
	130 000	46.4		29	29	33	38	28	29	32	40
A330-700L WV001 ZCG -0.4 m	205 900	46.4	1.42	45	51	60	70	48	52	59	79
	130 000	46.4		29	29	33	38	28	29	32	40
A330-700L WV001 ZCG -0.5 m	205 900	46.4	1.42	45	51	60	70	48	52	59	79
	130 000	46.4		29	29	33	38	28	29	32	40

F_AC_070900_1_0280103_01_00

Aircraft Classification Number
ACN Table (Sheet 2 of 2)
FIGURE-7-9-0-991-028-A01

7-9-0

7-10-0 ACR/PCR Reporting System - Flexible And Rigid Pavement****ON A/C A330-700L**ACR/PCR Reporting System - Flexible and Rigid Pavements

1. The ACR/PCR system has been developed by the ICAO to overcome the deficiencies of the ACN/PCN system. Significant advances in pavement design methods had occurred since its development in the late 1970s early 1980s, leading to inconsistencies with the pavement-strength-rating system.

The ACR/PCR system entails new procedures for the determination of both the ACR and the PCR that are consistent with the current pavement design procedures. This allows to capture the effects of the improved characteristics of new pavement materials as well as modern landing gear configurations, thus leading to an improved accuracy.

This section give data about the Aircraft Classification Rating (ACR) for the maximum ramp weight in relation with standard subgrade strength values for flexible and rigid pavement. To determine the ACR at other aircraft gross weight, use the official ICAO-ACR software.

NOTE : An aircraft with an ACR equal to or less than the reported PCR can operate on that pavement, subject to any limitation on the tire pressure. (Ref: ICAO Aerodrome Design Manual, Part 3, Third Edition 2020).

2. Aircraft Classification Rating - ACR Table

The table FIGURE 7-10-0-991-010-A gives ACR data in tabular format for all the operational weight variants of the aircraft.

For questions or specific calculation related to ACR/PCR reporting system, contact Airbus.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

**ON A/C A330-700L

AIRCRAFT TYPE	ALL UP MASS (kg)	LOAD ON ONE MAIN GEAR LEG (%)	TIRE PRESSURE (MPa)	ACR FOR RIGID PAVEMENT SUBGRADES - MPa				ACR FOR FLEXIBLE PAVEMENT SUBGRADES - MPa			
				HIGH 200	MEDIUM 120	LOW 80	ULTRA-LOW 50	HIGH 200	MEDIUM 120	LOW 80	ULTRA-LOW 50
A330-700L WV000 ZCG +0.7 m	227 900	45.1	1.42	550	630	710	800	520	540	590	710
A330-700L WV000 ZCG +0.6 m	227 900	45.2	1.42	560	640	710	810	520	540	590	710
A330-700L WV000 ZCG +0.5 m	227 900	45.3	1.42	560	640	720	810	530	550	590	710
A330-700L WV000 ZCG +0.4 m	227 900	45.5	1.42	560	640	720	810	530	550	590	710
A330-700L WV000 ZCG +0.3 m	227 900	45.6	1.42	560	640	720	820	530	550	600	720
A330-700L WV000 ZCG +0.2 m	227 900	45.7	1.42	570	650	720	820	530	550	600	720
A330-700L WV000 ZCG +0.1 m	227 900	45.8	1.42	570	650	730	820	530	550	600	720
A330-700L WV000 ZCG 0 m	227 900	45.8	1.42	570	650	730	820	530	550	600	720
A330-700L WV000 ZCG -0.1 m	227 900	45.8	1.42	570	650	730	820	530	550	600	720
A330-700L WV000 ZCG -0.2 m	227 900	45.8	1.42	570	650	730	820	530	550	600	720
A330-700L WV000 ZCG -0.3 m	227 900	45.8	1.42	570	650	730	820	530	550	600	720
A330-700L WV000 ZCG -0.4 m	227 900	45.8	1.42	570	650	730	820	530	550	600	720
A330-700L WV000 ZCG -0.5 m	227 900	45.8	1.42	570	650	730	820	530	550	600	720
A330-700L WV001 ZCG +0.7 m	205 900	45.6	1.42	500	560	620	710	480	490	530	620
A330-700L WV001 ZCG +0.6 m	205 900	45.8	1.42	500	560	630	710	480	490	530	620

F_AC_071000_1_0100101_01_00

ACR Table
(Sheet 1 of 2)
FIGURE-7-10-0-991-010-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

AIRCRAFT TYPE	ALL UP MASS (kg)	LOAD ON ONE MAIN GEAR LEG (%)	TIRE PRESSURE (MPa)	ACR FOR RIGID PAVEMENT SUBGRADES - MPa				ACR FOR FLEXIBLE PAVEMENT SUBGRADES - MPa			
				HIGH 200	MEDIUM 120	LOW 80	ULTRA-LOW 50	HIGH 200	MEDIUM 120	LOW 80	ULTRA-LOW 50
A330-700L WV001 ZCG +0.5 m	205 900	45.9	1.42	500	560	630	710	480	500	530	620
A330-700L WV001 ZCG +0.4 m	205 900	46.1	1.42	500	570	630	720	480	500	530	620
A330-700L WV001 ZCG +0.3 m	205 900	46.2	1.42	500	570	640	720	480	500	530	630
A330-700L WV001 ZCG +0.2 m	205 900	46.3	1.42	510	570	640	720	480	500	540	630
A330-700L WV001 ZCG +0.1 m	205 900	46.4	1.42	510	570	640	730	490	500	540	630
A330-700L WV001 ZCG 0 m	205 900	46.4	1.42	510	570	640	730	490	500	540	630
A330-700L WV001 ZCG -0.1 m	205 900	46.4	1.42	510	570	640	730	490	500	540	630
A330-700L WV001 ZCG -0.2 m	205 900	46.4	1.42	510	570	640	730	490	500	540	630
A330-700L WV001 ZCG -0.3 m	205 900	46.4	1.42	510	570	640	730	490	500	540	630
A330-700L WV001 ZCG -0.4 m	205 900	46.4	1.42	510	570	640	730	490	500	540	630
A330-700L WV001 ZCG -0.5 m	205 900	46.4	1.42	510	570	640	730	490	500	540	630

F_AC_071000_1_0100102_01_00

ACR Table
(Sheet 2 of 2)
FIGURE-7-10-0-991-010-A01

SCALED DRAWINGS**8-0-0 SCALED DRAWINGS******ON A/C A330-700L****Scaled Drawings**


1. This section gives the scaled drawings.

NOTE : When printing this drawing, make sure to adjust for proper scaling.

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

****ON A/C A330-700L**

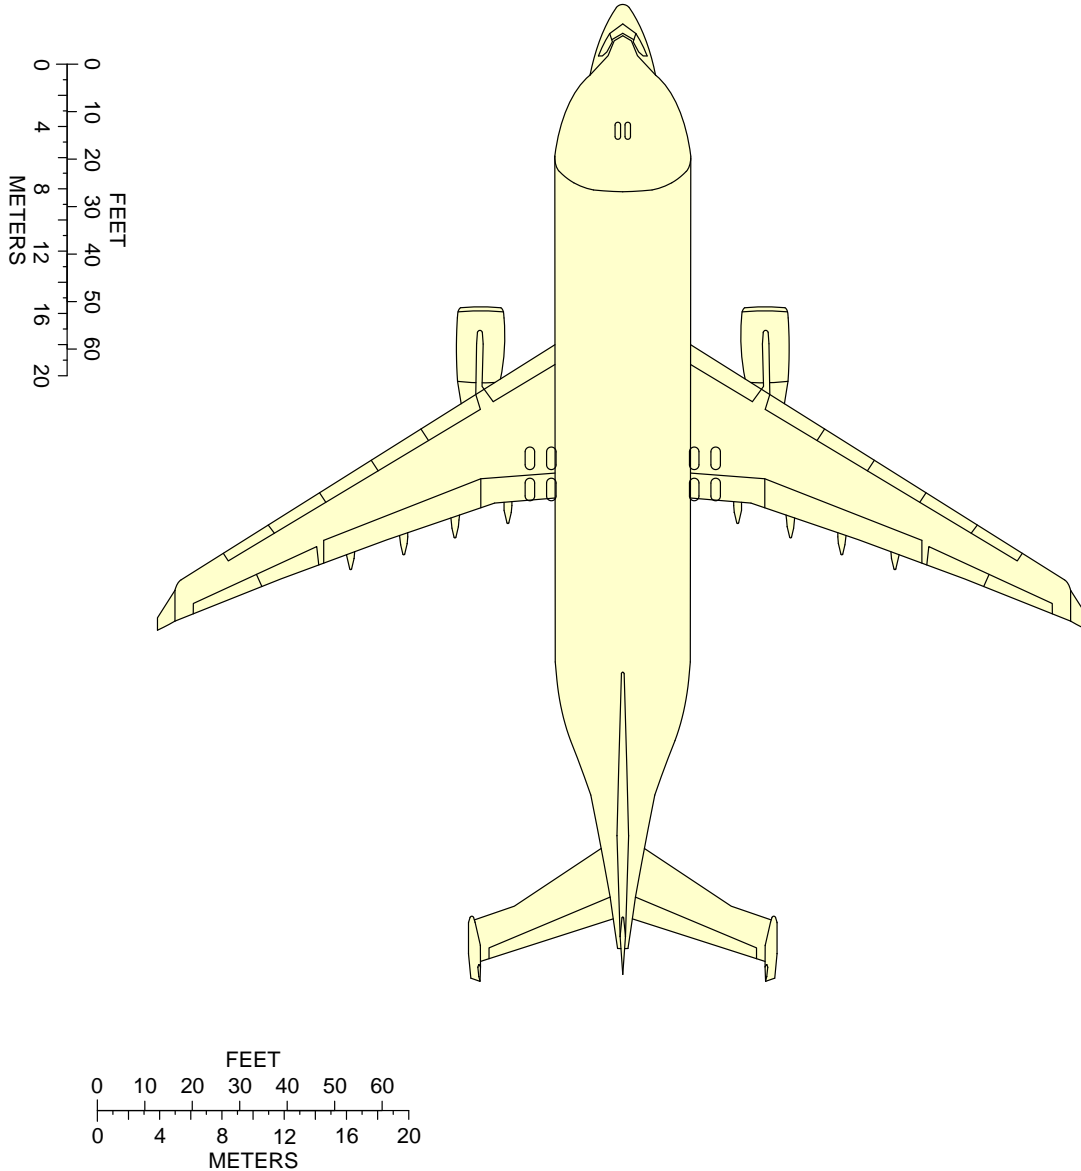

NOTE:
WHEN PRINTING THIS DRAWING, MAKE SURE TO ADJUST FOR
PROPER SCALING.

F_AC_080000_1_0070101_01_00

Scaled Drawing
FIGURE-8-0-0-991-007-A01

AIRCRAFT RESCUE AND FIRE FIGHTING**10-0-0 AIRCRAFT RESCUE AND FIRE FIGHTING******ON A/C A330-700L**Aircraft Rescue and Fire Fighting

1. Aircraft Rescue and Fire Fighting Charts

This sections gives the data related to aircraft rescue and fire fighting.

The figures contained in this section are the figures that are in the Aircraft Rescue and Fire Fighting Charts poster available for download on AIRBUSWorld and the Airbus website.

****ON A/C A330-700L**

AIRBUS

A330-700L

Aircraft Rescue and Fire Fighting Chart

ARFC

NOTE:

THIS CHART GIVES THE GENERAL LAYOUT OF THE A330-700L STANDARD VERSION.
THE NUMBER AND ARRANGEMENT OF THE INDIVIDUAL ITEMS VARY WITH THE CUSTOMERS.
FIGURES CONTAINED IN THIS POSTER ARE AVAILABLE SEPARATELY IN THE CHAPTER 10 OF THE
"AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING" DOCUMENT.


ISSUED BY: AIRBUS S.A.S CUSTOMER SERVICES TECHNICAL DATA SUPPORT AND SERVICES 31707 BLAGNAC CEDEX FRANCE	REVISION DATE: JAN 2020 REFERENCE : F_RF_000000_1_A33070L SHEET 1/2
--	--

© AIRBUS S.A.S. 2018 . All rights reserved.

F_AC_100000_1_0860101_01_00

Front Page
FIGURE-10-0-0-991-086-A01


**ON A/C A330-700L

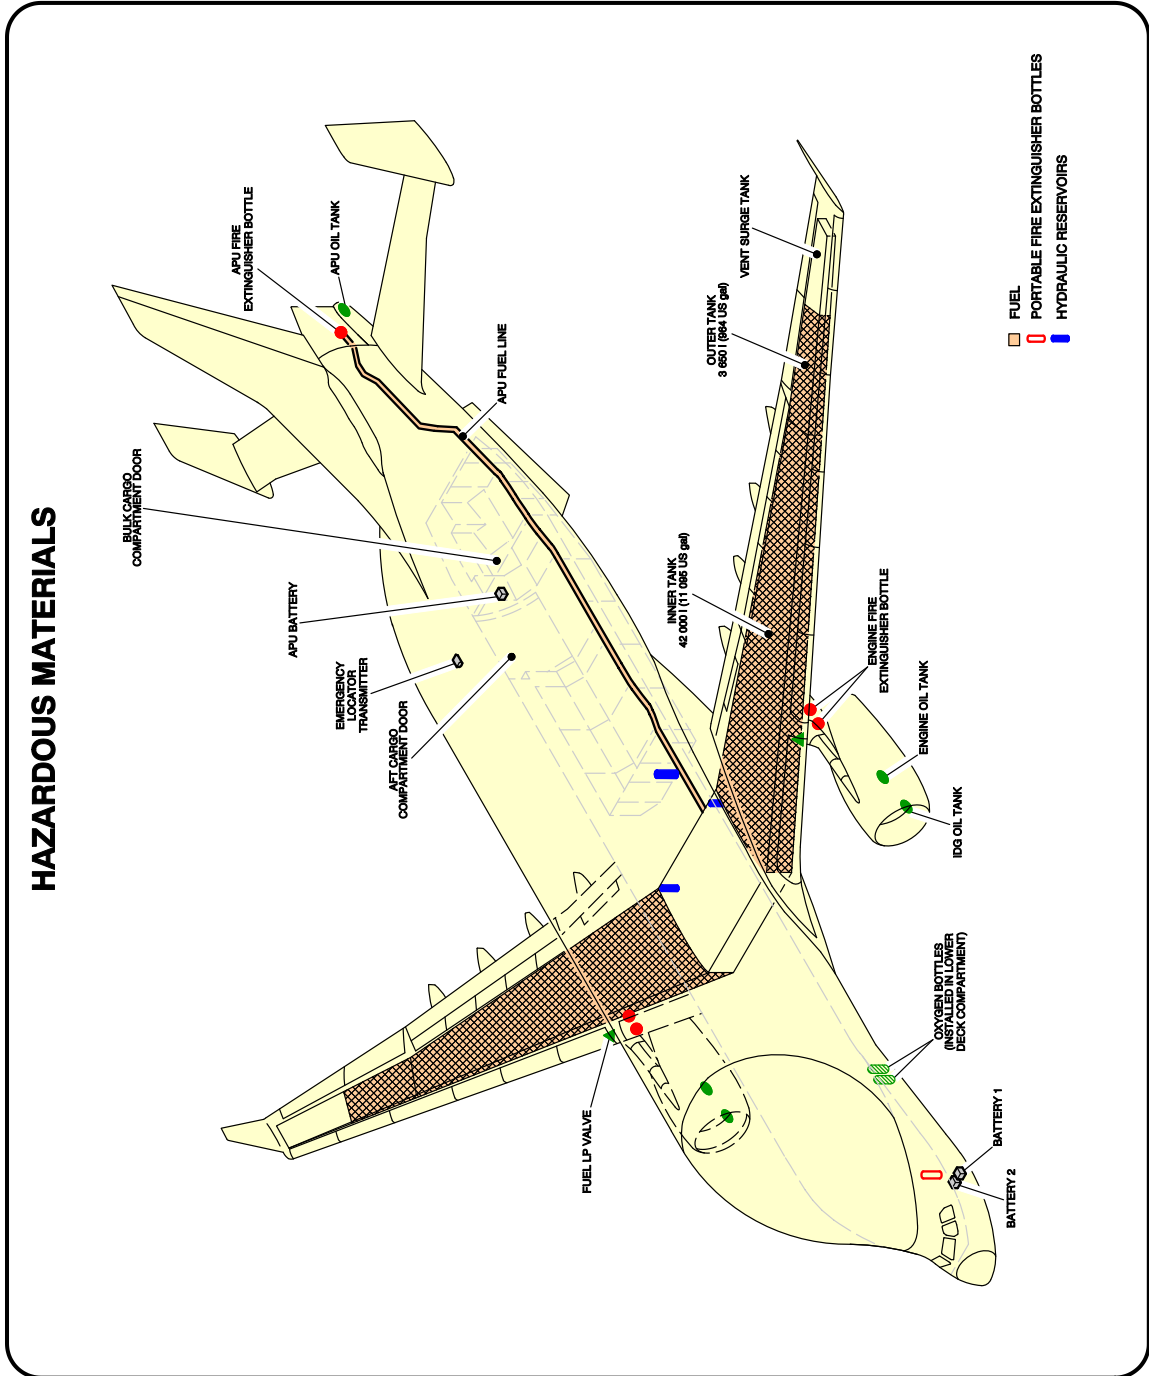

F_AC_100000_1_0870101_01_01

Highly Flammable and Hazardous Materials and Components
 FIGURE-10-0-0-991-087-A01


**ON A/C A330-700L

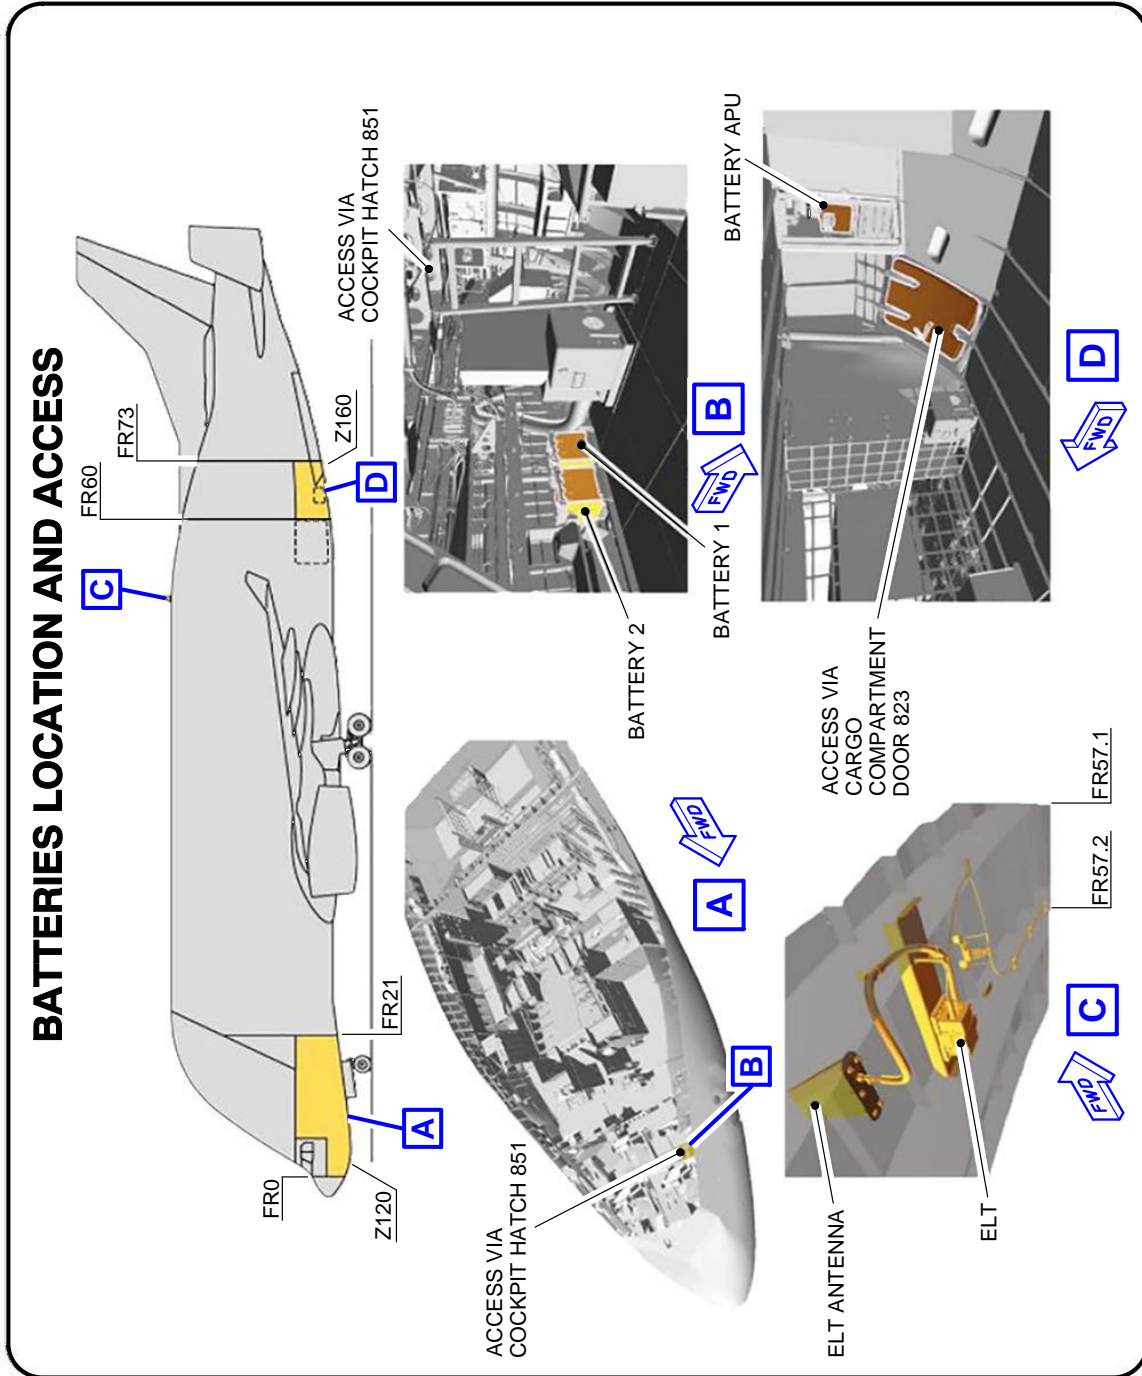

F_AC_100000_1_0880101_01_00

Batteries Location and Access
FIGURE-10-0-0-991-088-A01

****ON A/C A330-700L**

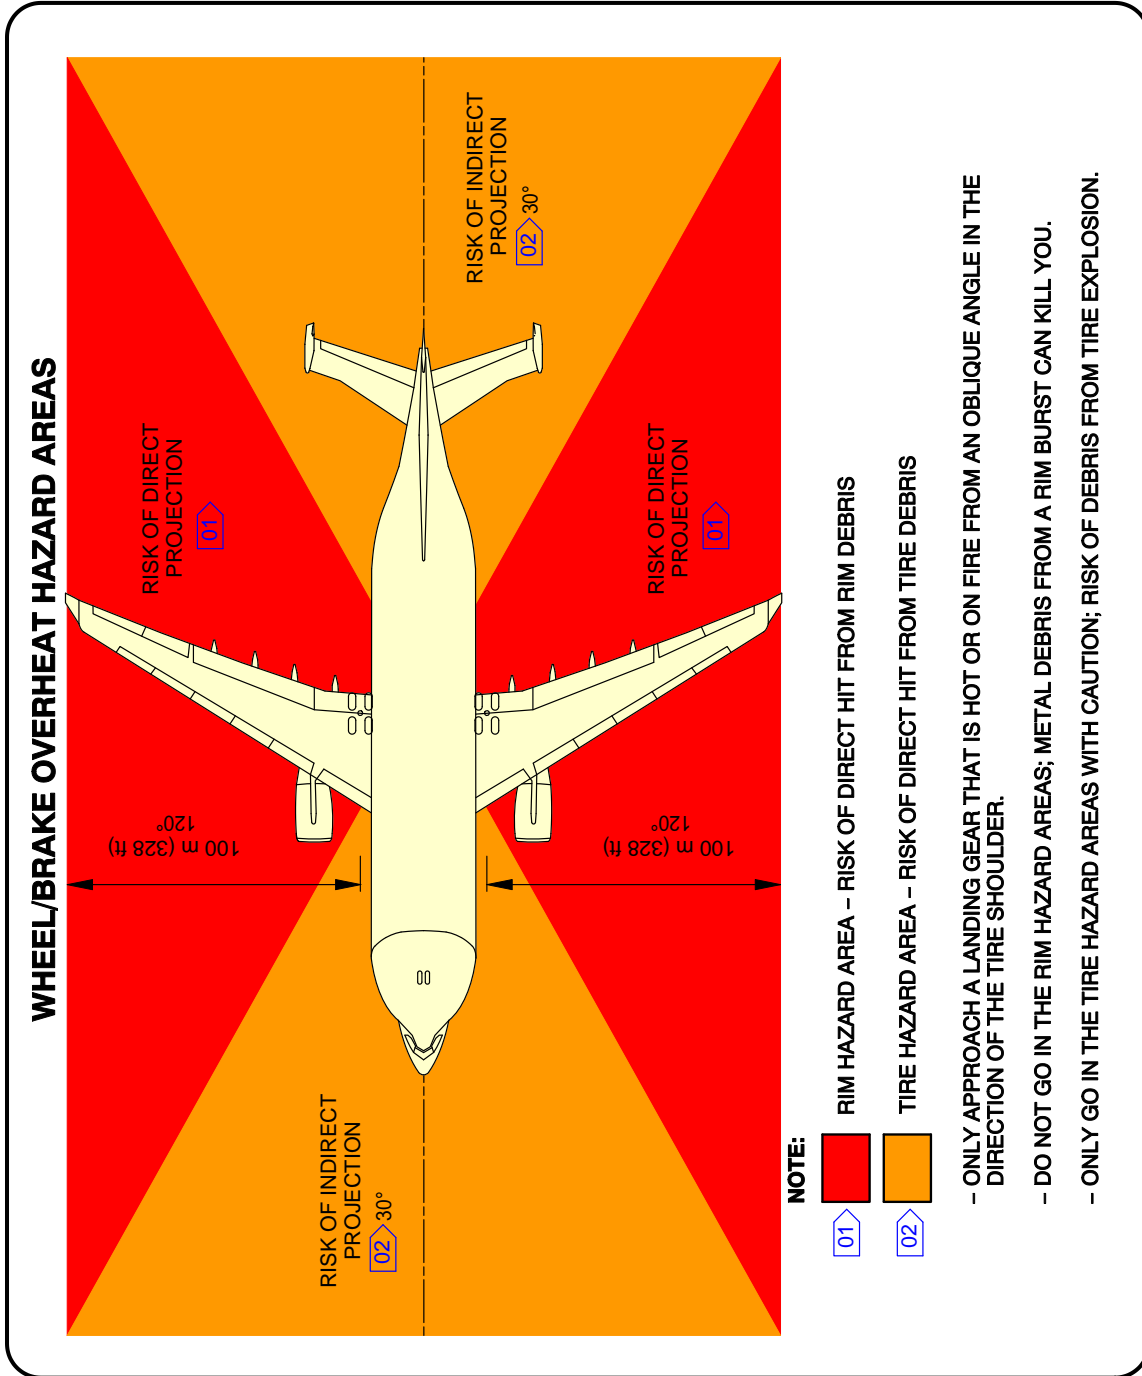

F_AC_100000_1_0890101_01_01

Wheel/Brake Overheat
 Wheel Safety Area (Sheet 1 of 2)
 FIGURE-10-0-0-991-089-A01

**ON A/C A330-700L

BRAKE OVERHEAT AND LANDING GEAR FIRE

WARNING: BE VERY CAREFUL WHEN THERE IS A BRAKE OVERHEAT AND/OR LANDING GEAR FIRE. THERE IS A RISK OF TIRE EXPLOSION AND/OR WHEEL RIM BURST THAT CAN CAUSE DEATH OR INJURY. MAKE SURE THAT YOU OBEY THE SAFETY PRECAUTIONS THAT FOLLOW.

THE PROCEDURES THAT FOLLOW GIVE RECOMMENDATIONS AND SAFETY PRECAUTIONS FOR THE COOLING OF VERY HOT BRAKES AFTER ABNORMAL OPERATIONS SUCH AS A REJECTED TAKE-OFF OR OVERWEIGHT LANDING. FOR THE COOLING OF BRAKES AFTER NORMAL TAXI-IN, REFER TO YOUR COMPANY PROCEDURES.

BRAKE OVERHEAT:

- 1 - GET THE BRAKE TEMPERATURE FROM THE COCKPIT OR USE A REMOTE MEASUREMENT TECHNIQUE. THE REAL TEMPERATURE OF THE BRAKES CAN BE MUCH HIGHER THAN THE TEMPERATURE SHOWN ON THE ECAM.
NOTE: AT HIGH TEMPERATURES (>800°C), THERE IS A RISK OF WARPING OF THE LANDING GEAR STRUTS AND AXLES.
- 2 - APPROACH THE LANDING GEAR WITH EXTREME CAUTION AND FROM AN OBLIQUE ANGLE IN THE DIRECTION OF THE TIRE SHOULDER. DO NOT GO INTO THE RIM HAZARD AREA AND ONLY GO IN THE TIRE HAZARD AREA WITH CAUTION. (REF FIG. WHEEL/BRAKE OVERHEAT HAZARD AREAS). IF POSSIBLE, STAY IN A VEHICLE.
- 3 - LOOK AT THE CONDITION OF THE TIRES:
IF THE TIRES ARE STILL INFLATED (FUSE PLUGS NOT MELTED), THERE IS A RISK OF TIRE EXPLOSION AND RIM BURST. DO NOT USE COOLING FANS BECAUSE THEY CAN PREVENT OPERATION OF THE FUSE PLUGS.
- 4 - USE WATER MIST TO DECREASE THE TEMPERATURE OF THE COMPLETE WHEEL AND BRAKE ASSEMBLY. USE A TECHNIQUE THAT PREVENTS SUDDEN COOLING. SUDDEN COOLING CAN CAUSE WHEEL CRACKS OR RIM BURST. DO NOT APPLY WATER, FOAM OR CO₂. THESE COOLING AGENTS (AND ESPECIALLY CO₂, WHICH HAS A VERY STRONG COOLING EFFECT) CAN CAUSE THERMAL SHOCKS AND BURST OF HOT PARTS.


LANDING GEAR FIRE:

- CAUTION:** AIRBUS RECOMMENDS THAT YOU DO NOT USE DRY POWDERS OR DRY CHEMICALS ON HOT BRAKES OR TO EXTINGUISH LANDING GEAR FIRES. THESE AGENTS CAN CHANGE INTO SOLID OR ENAMELED DEPOSITS. THEY CAN DECREASE THE SPEED OF HEAT DISSIPATION WITH A POSSIBLE RISK OF PERMANENT STRUCTURAL DAMAGE TO THE BRAKES, WHEELS OR WHEEL AXLES.
- 1 - IMMEDIATELY STOP THE FIRE:
 - A) APPROACH THE LANDING GEAR WITH EXTREME CAUTION FROM AN OBLIQUE ANGLE IN THE DIRECTION OF THE TIRE SHOULDER. DO NOT GO INTO THE RIM HAZARD AREA AND ONLY GO IN THE TIRE HAZARD AREA WITH CAUTION. IF POSSIBLE, STAY IN A VEHICLE.
 - B) USE LARGE AMOUNTS OF WATER, WATER MIST; IF THE FUEL TANKS ARE AT RISK, USE FOAM. USE A TECHNIQUE THAT PREVENTS SUDDEN COOLING. SUDDEN COOLING CAN CAUSE WHEEL CRACKS OR RIM BURST.
 - C) DO NOT USE FANS OR BLOWERS.

F_AC_100000_1_0890102_01_00

Wheel/Brake Overheat
Recommendations (Sheet 2 of 2)
FIGURE-10-0-0-991-089-A01


**ON A/C A330-700L

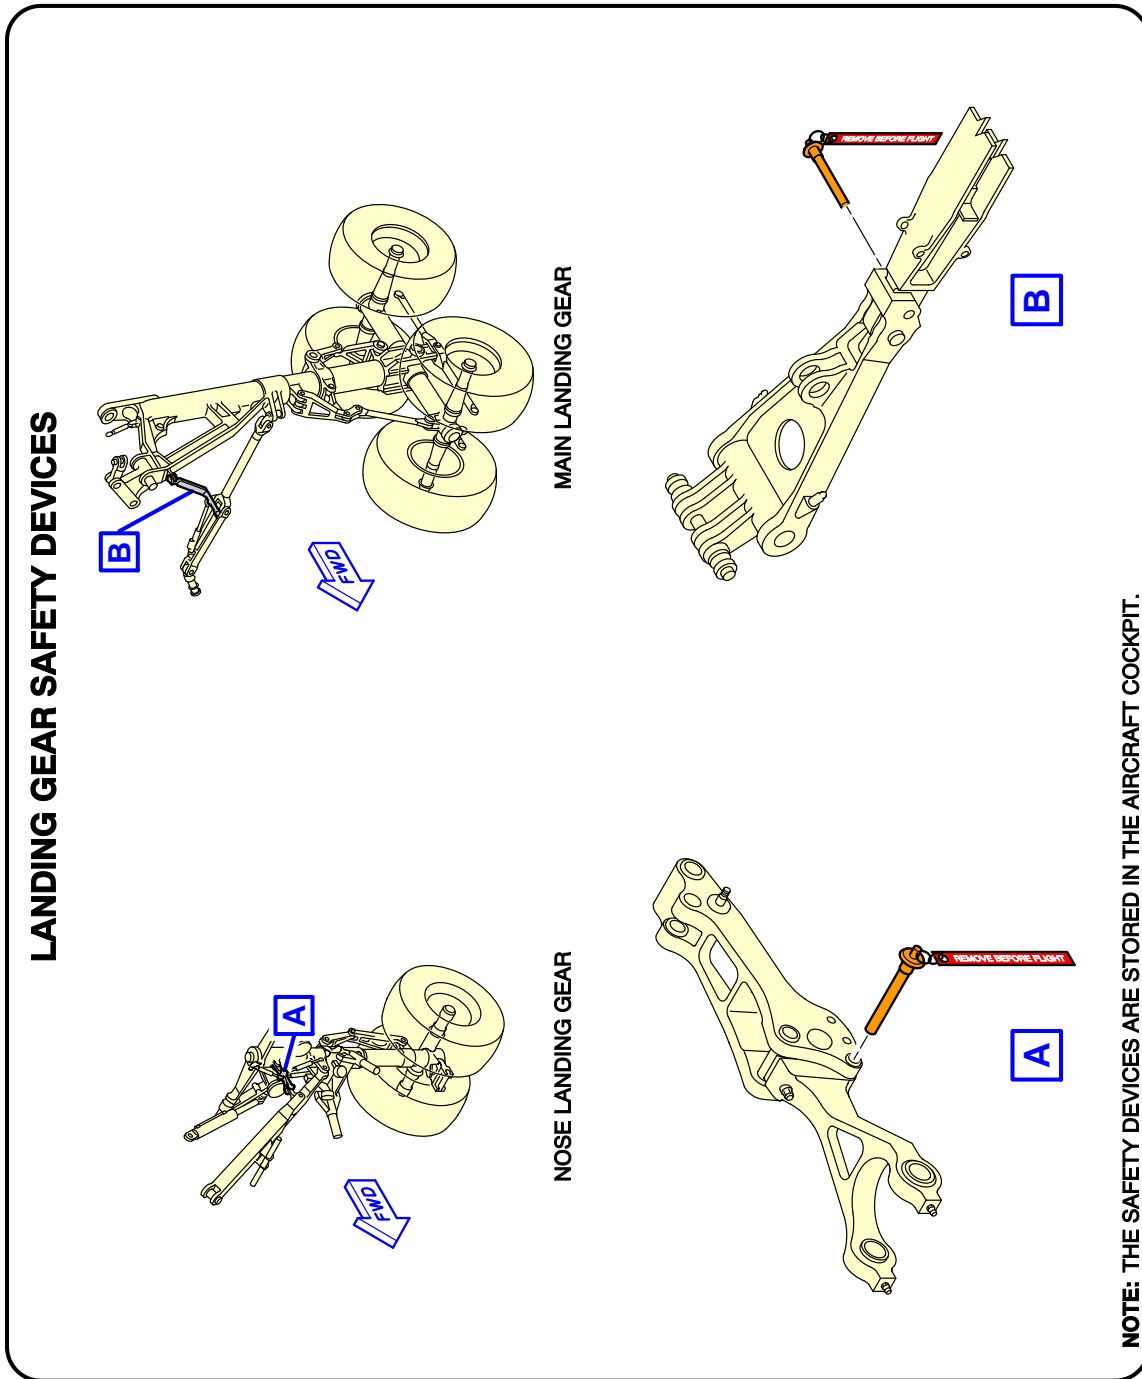

F_AC_100000_1_0910101_01_00

Ground Lock Safety-Devices
FIGURE-10-0-0-991-091-A01

****ON A/C A330-700L**

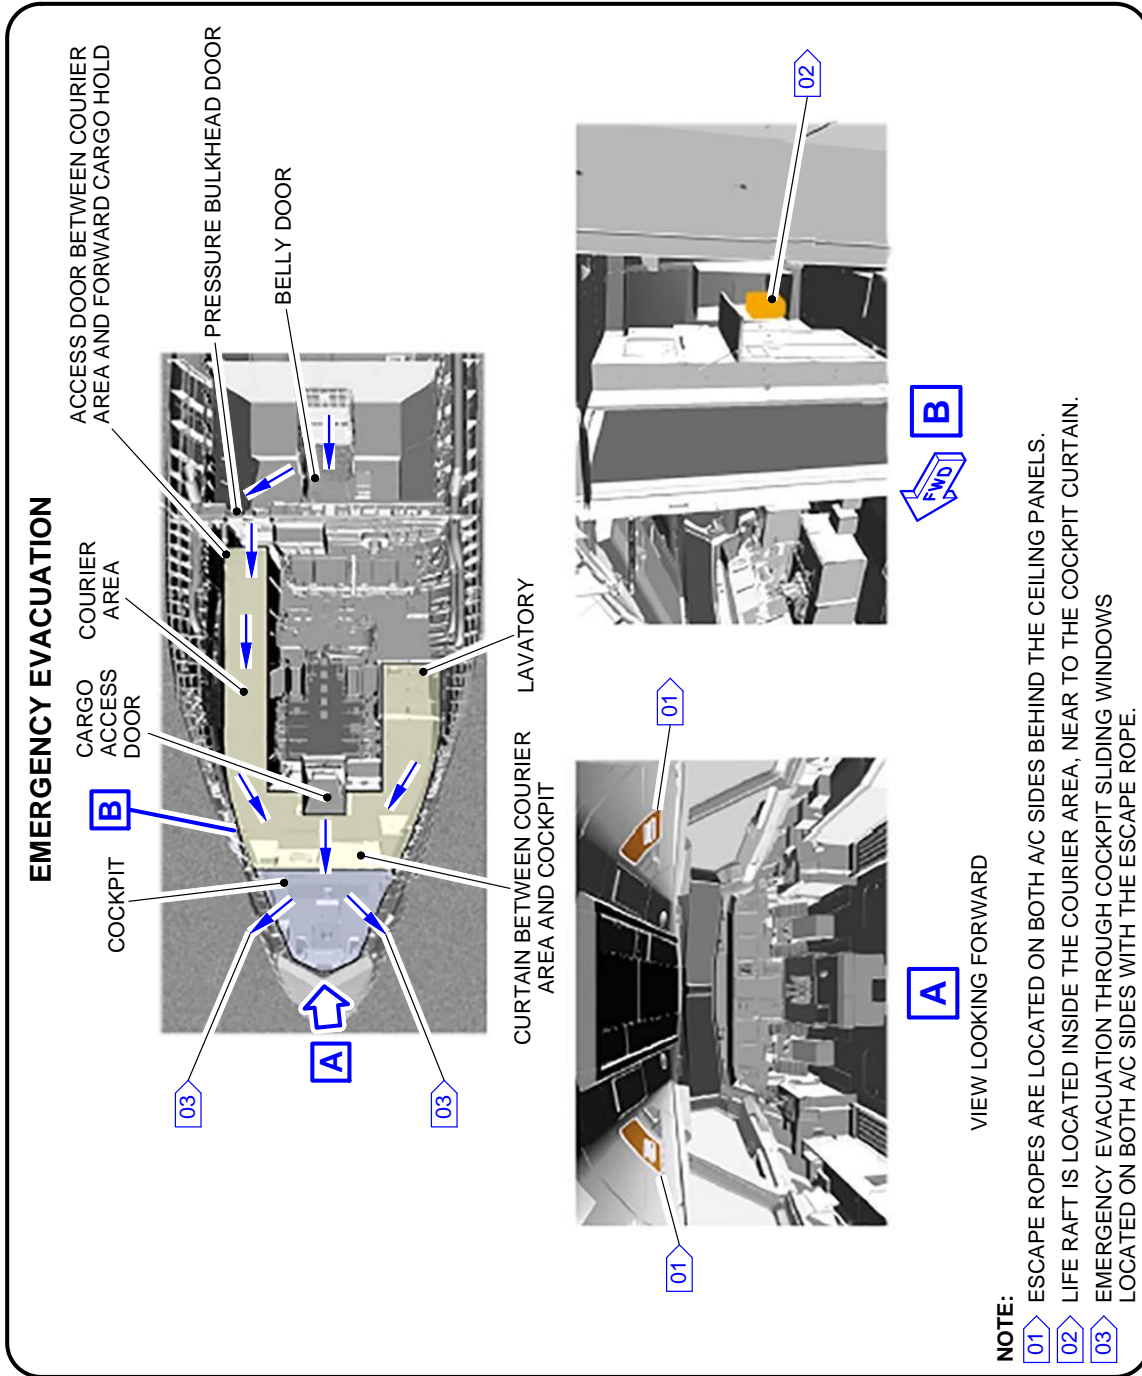




F_AC_100000_1_0920101_01_01

Emergency Evacuation Devices
FIGURE-10-0-0-991-092-A01

****ON A/C A330-700L**

SLIDING WINDOWS EVACUATION



ACCESS FROM THE EXTERIOR BY SLIDING WINDOWS

- TURN THE HANDLE TO OPEN
- PUSH WINDOW INWARD THEN SLIDE AFTWARD

EVACUATION FROM THE INTERIOR BY SLIDING WINDOWS

- PUSH THE BUTTON AND PULL THE HANDLE UNTIL IT STOP TO OPEN THE SLIDING WINDOW
- USE THE ESCAPE ROPE TO GET DOWN

F_AC_100000_1_1010101_01_00

Sliding Windows Evacuation
FIGURE-10-0-0-991-101-A01

****ON A/C A330-700L**

BELLY DOOR EXTERIOR CONTROL HANDLE

HANDLE

INDICATOR FLAG

INNER GRID

FLAP

BELLY DOOR IN CLOSED POSITION

BELLY DOOR IN OPEN POSITION


DOOR OPENING:

- 1 - PUSH THE FLAP TO HOLD HANDLE AND INNER GRIP.
- 2 - PUSH THE INNER GRIP.
- 3 - PULL THE HANDLE FULLY DOWN.
- 4 - EXTEND THE FOLDABLE STAIR BY HAND.
- 5 - CHECK THAT INDICATOR FLAGS ARE OUT.

F_AC_100000_1_0930101_01_01

Belly-Door Exterior Control-Handle
FIGURE-10-0-0-991-093-A01

****ON A/C A330-700L**

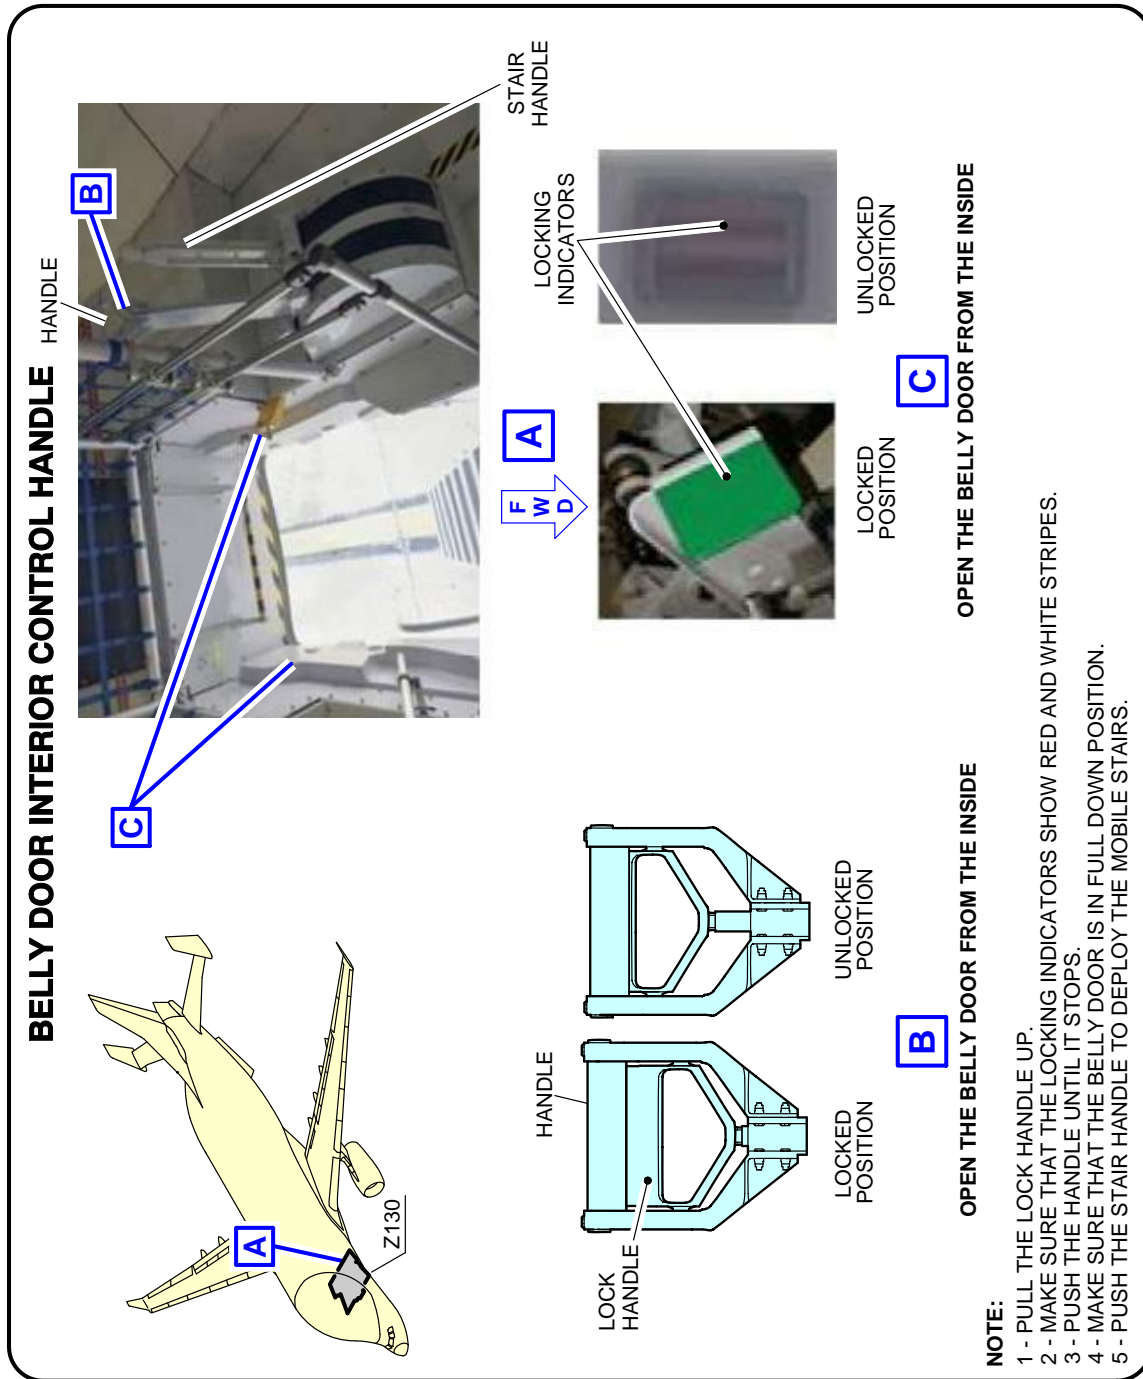


F_AC_100000_1_1020101_01_00


Belly-Door Interior Control-Handle
FIGURE-10-0-0-991-102-A01

****ON A/C A330-700L**

PRESSURE BULKHEAD DOOR

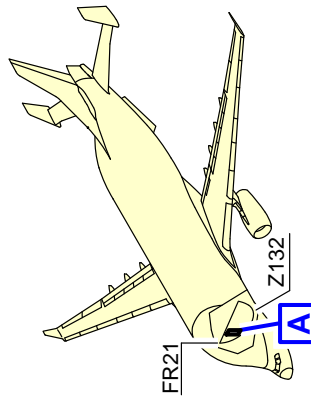


FR21
Z132

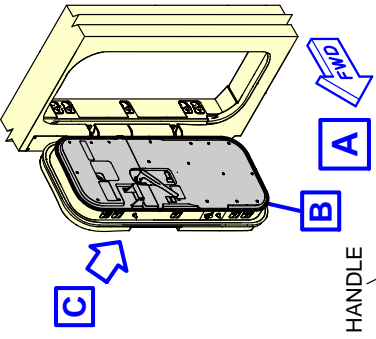

HANDLE

B

OPENING OF THE PRESSURE BULKHEAD DOOR FROM COURIER AREA




VISUAL INDICATOR
HANDLE

- 1 - TURN THE HANDLE COUNTERCLOCKWISE.
- 2 - MAKE SURE THAT GREEN LINE ON HANDLE AND RED LINE ON DOOR LINING ARE ALIGNED.
- 3 - MAKE SURE THAT THE VISUAL INDICATOR SHOWS A RED TARGET.
- 4 - PULL THE PRESSURE BULKHEAD DOOR.

C

OPENING OF THE PRESSURE BULKHEAD DOOR FROM FORWARD COMPARTMENT AREA




- 1 - TURN THE HANDLE CLOCKWISE.
- 2 - MAKE SURE THAT GREEN LINE ON HANDLE AND RED LINE ON DOOR LINING ARE ALIGNED.
- 3 - PUSH THE PRESSURE BULKHEAD DOOR.

F_AC_100000_1_1030101_01_00

Pressure Bulkhead Door
FIGURE-10-0-0-991-103-A01


****ON A/C A330-700L**

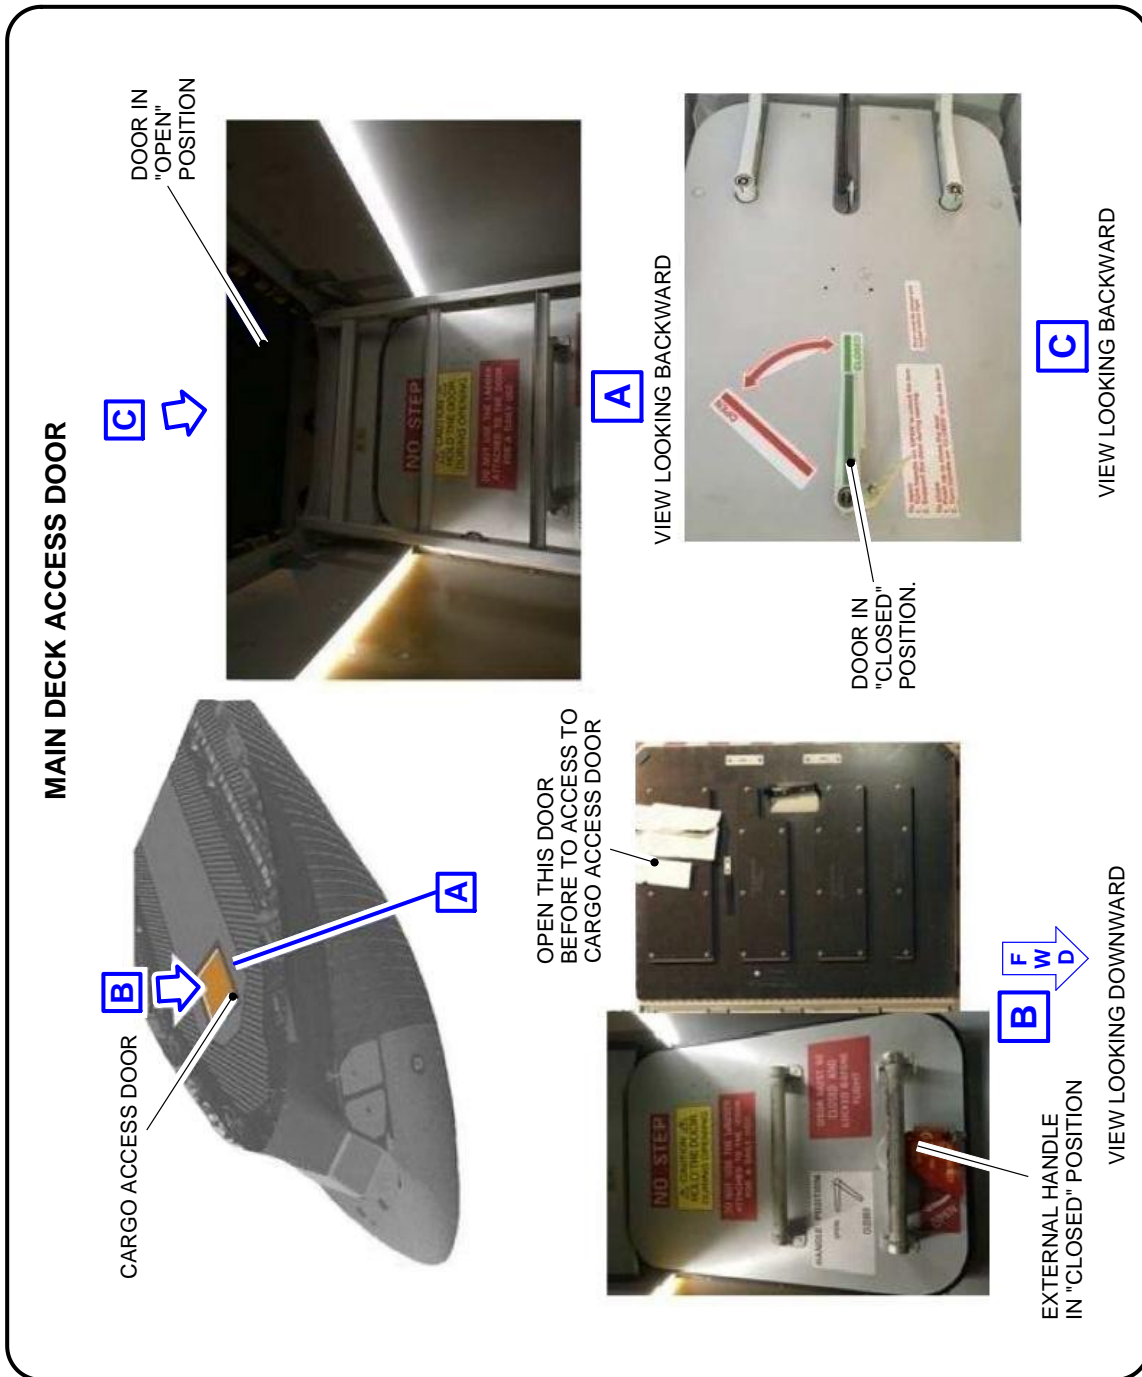

F_AC_100000_1_0940101_01_01

Main-Deck Access Door
FIGURE-10-0-0-991-094-A01

**ON A/C A330-700L

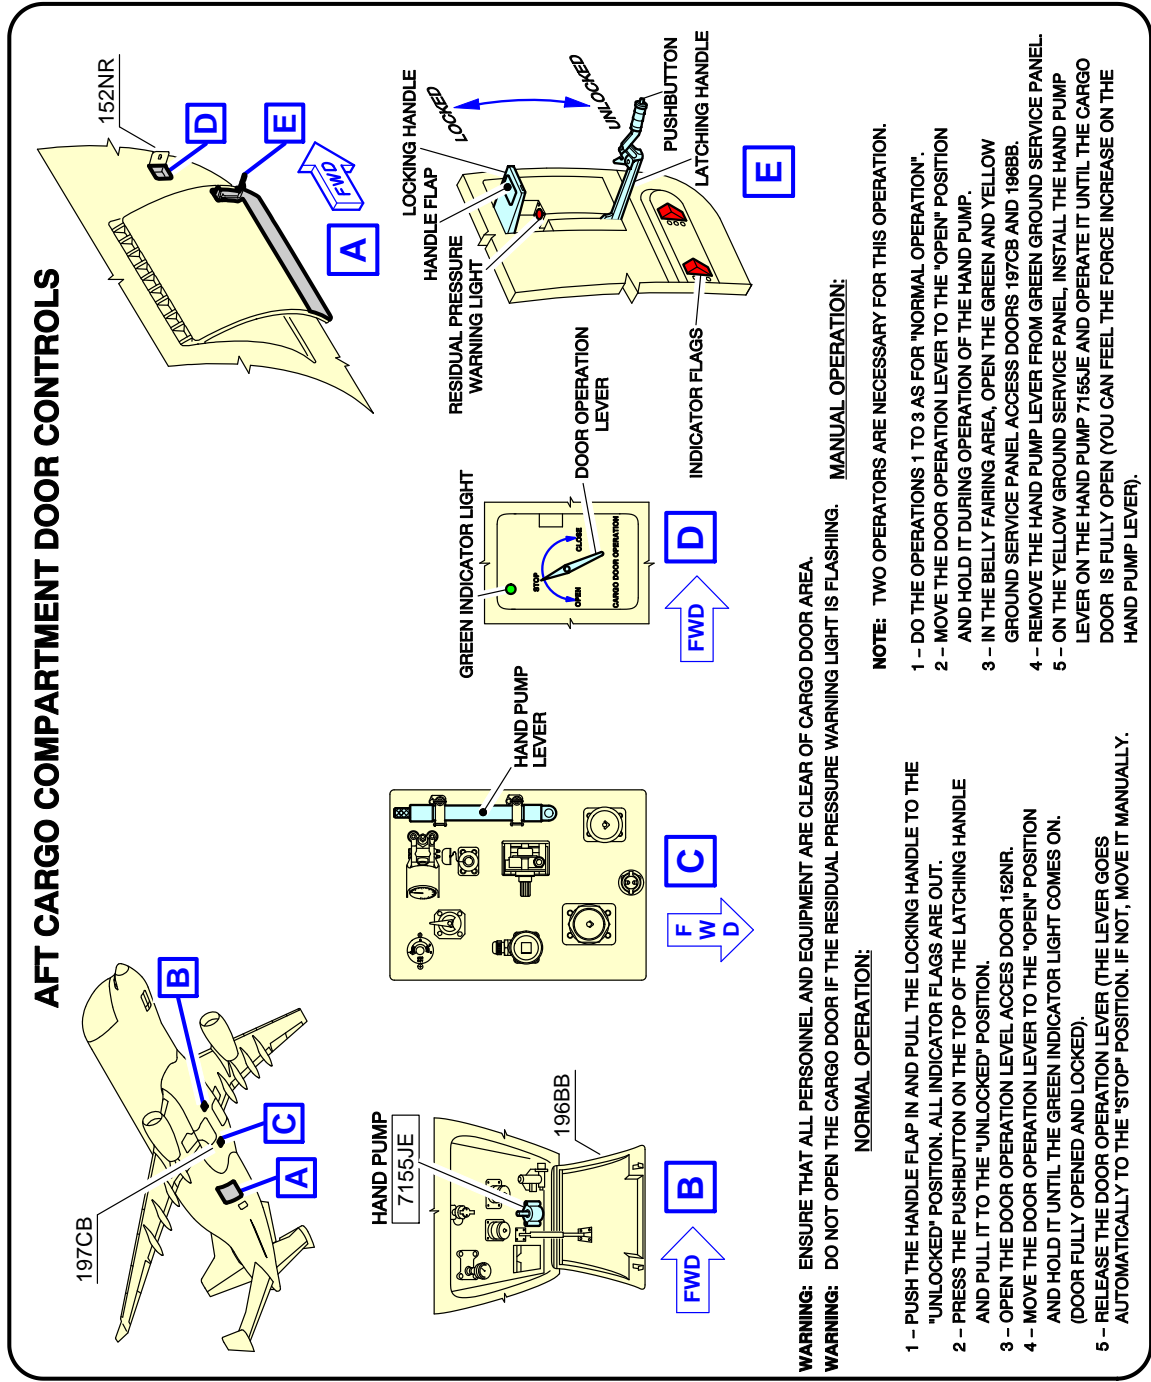

F_AC_100000_1_0950101_01_00

Aft-Cargo-Compartment Door Controls
 FIGURE-10-0-0-991-095-A01

****ON A/C A330-700L**

MAIN DECK CARGO DOOR CONTROL

FAULT WARNING LIGHT

"OPEN/CLOSE" TOGGLE SWITCH

"FULLY OPEN" LIGHT

C TYPICAL MAIN DECK CARGO DOOR OPERATION PANEL

A MAIN DECK CARGO DOOR OUTER OPERATION PANEL

B MAIN DECK CARGO DOOR INNER OPERATION PANEL

C MAIN DECK CARGO DOOR OPERATION PANEL

FWD

FWD

FWD

NORMAL OPERATION

WARNING: ENSURE THAT ALL PERSONNEL AND EQUIPMENT ARE CLEAR OF MAIN DECK CARGO DOOR AREA.

WARNING: WHEN RED WARNING LIGHT "FAULT" IS ILLUMINATED, THE DOOR CANNOT BE OPENED.

1 - HOLD "OPEN/CLOSE" TOGGLE SWITCH IN "OPEN" POSITION UNTIL DOOR STOPS AUTOMATICALLY AND THE "FULLY OPEN" LIGHT COMES ON.

2 - RELEASE THE TOGGLE SWITCH.


F_AC_100000_1_0960101_01_01

Main-Deck Cargo Door-Control
FIGURE-10-0-0-991-096-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING


**ON A/C A330-700L

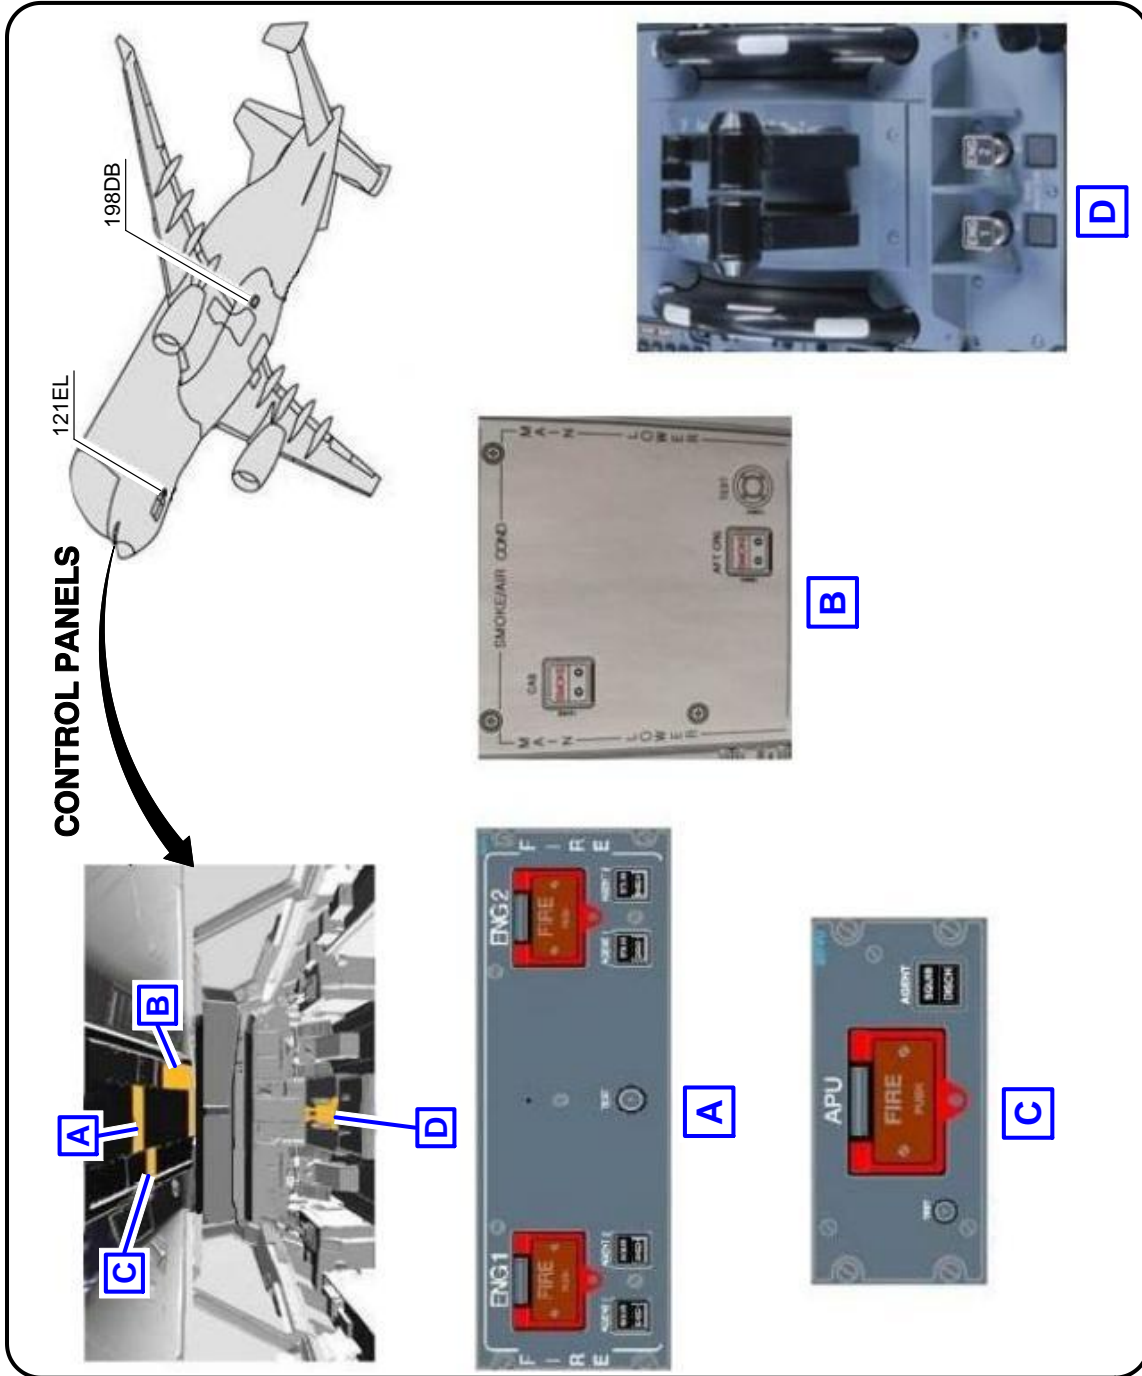

F_AC_100000_1_0970101_01_01

Control Panels
FIGURE-10-0-0-991-097-A01

****ON A/C A330-700L**

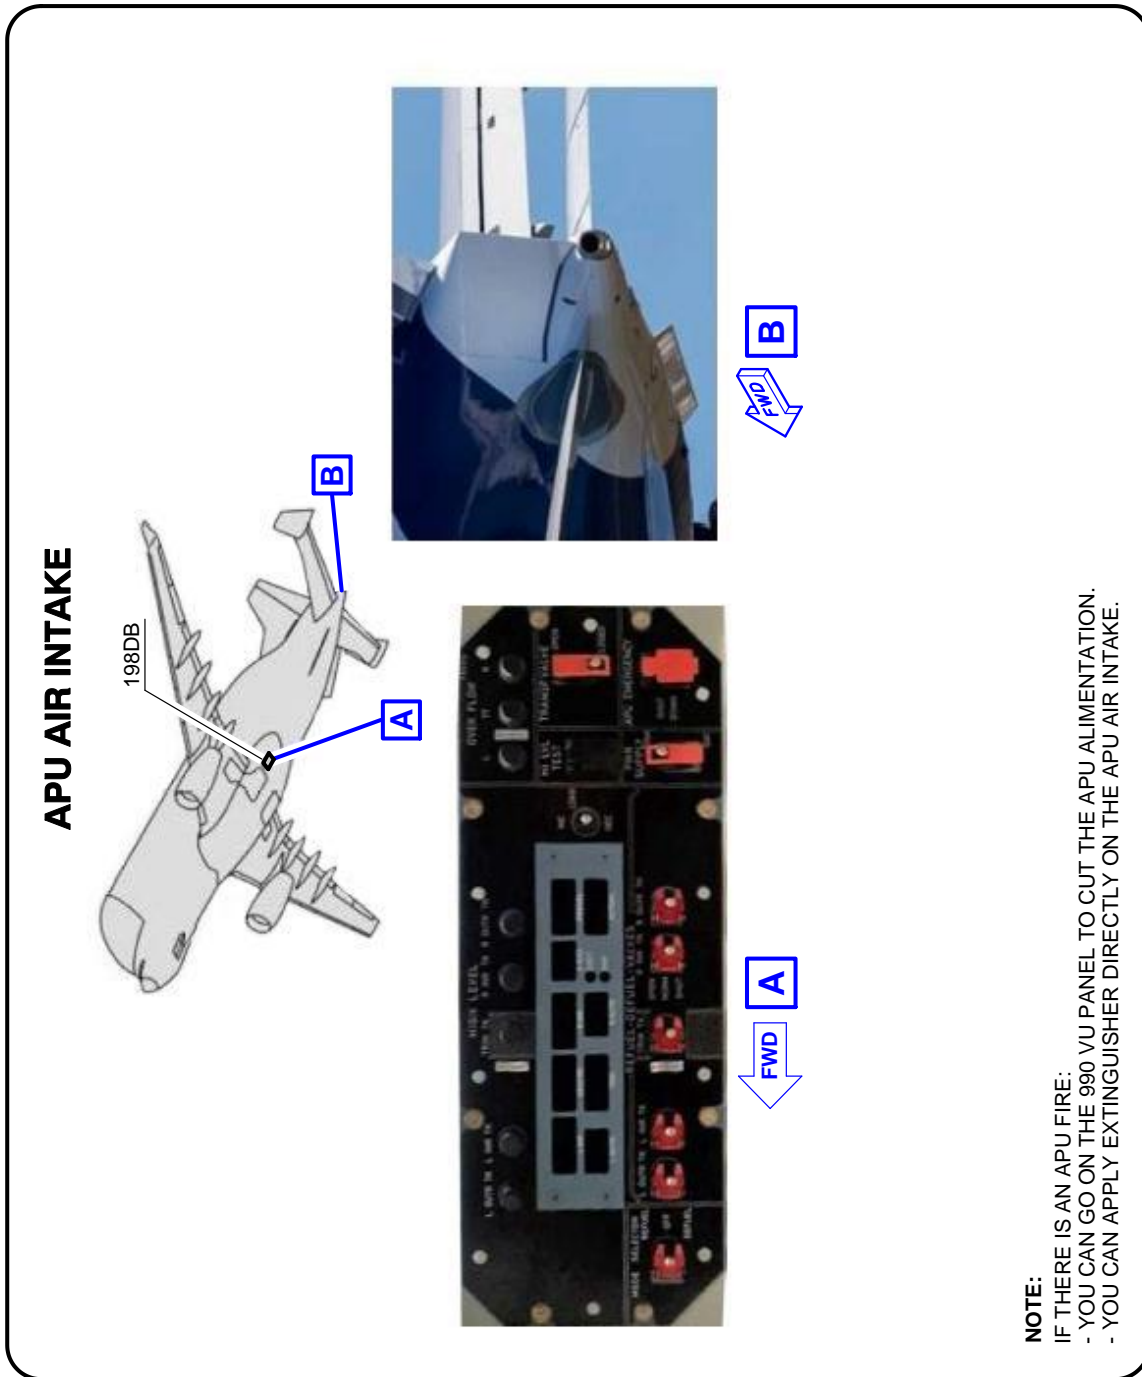


NOTE:
 IF THERE IS AN APU FIRE:
 - YOU CAN GO ON THE 990 VU PANEL TO CUT THE APU ALIMENTATION.
 - YOU CAN APPLY EXTINGUISHER DIRECTLY ON THE APU AIR INTAKE.

F_AC_100000_1_1040101_01_00

APU Air Intake
 FIGURE-10-0-0-991-104-A01

**ON A/C A330-700L

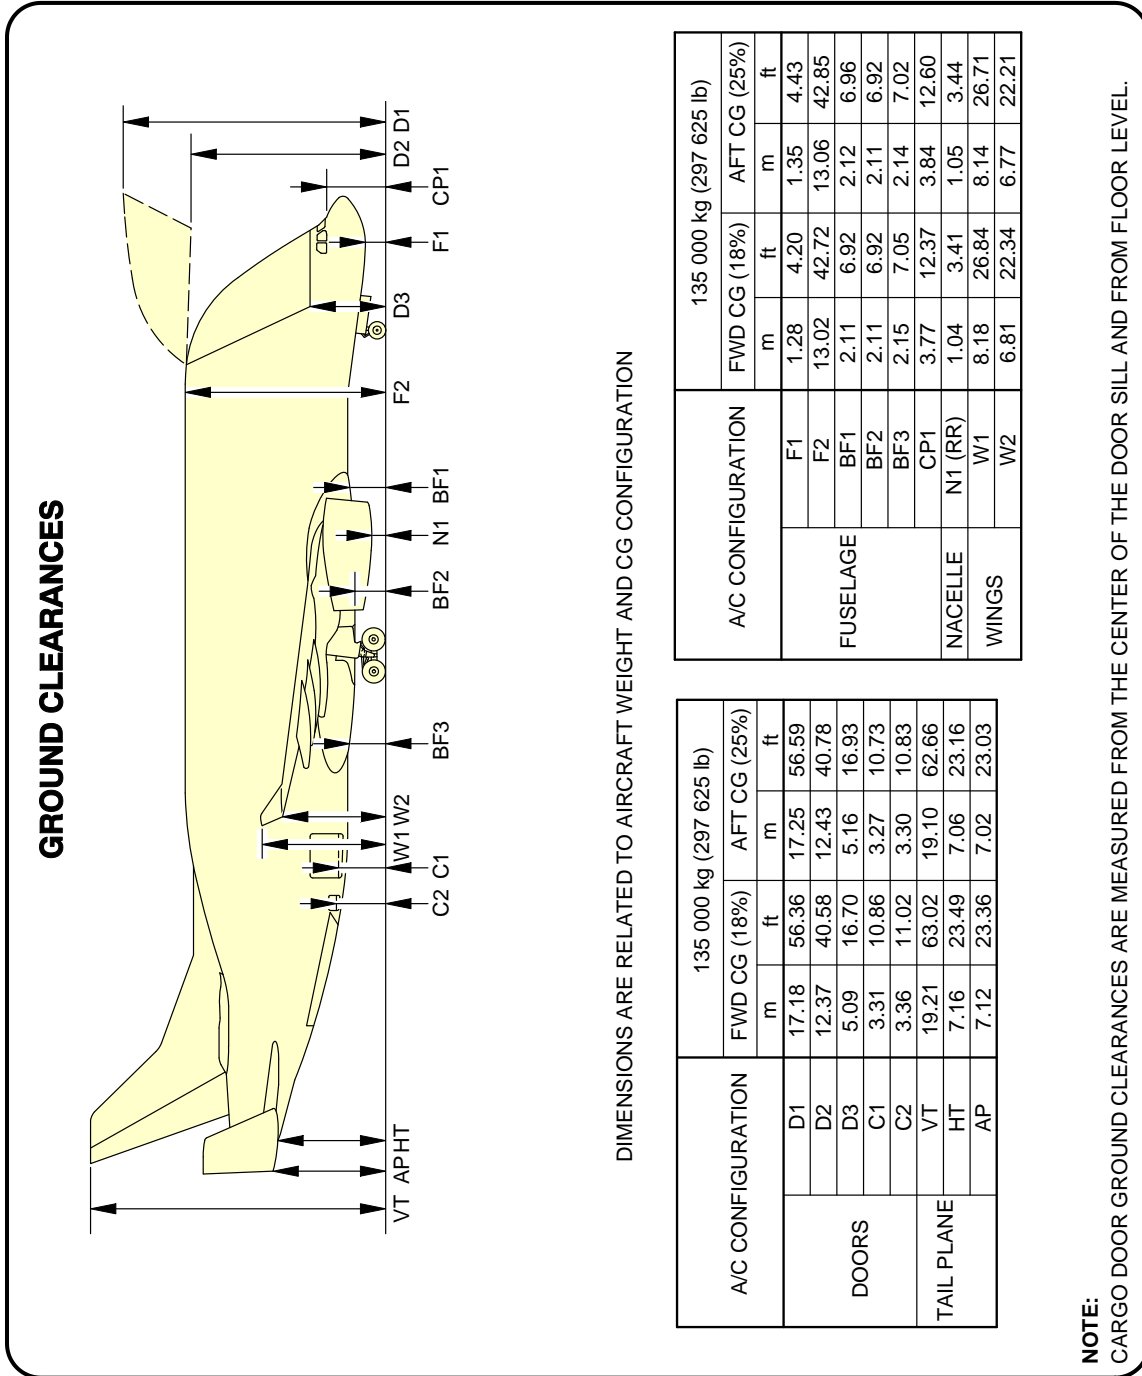

F_AC_100000_1_0990101_01_00

Ground Clearances
FIGURE-10-0-0-991-099-A01

A330-700L

AIRCRAFT CHARACTERISTICS - AIRPORT AND MAINTENANCE PLANNING

**ON A/C A330-700L



F_AC_100000_1_1000101_01_01

Structural Break-in Points
FIGURE-10-0-0-991-100-A01